

GEA SMARTPUMP



GEA Hilge DURIETTA 0

Compact, Single- and Multi-Stage
Centrifugal Pumps
Catalog

Legal notice

Publication date: November 2021

The publication of specifications, technical data and information in written or electronic form does not release the user from the responsibility of checking for themselves all products delivered by us for suitability for the application(s) intended. These may be subject to change without prior notification. Errors and printing errors excepted – we assume no liability for the correctness of specifications given.

The general terms and conditions of delivery apply.

All rights reserved – copyright on all contents.

GEA reserves the right to make technical changes to the information in this catalog.

GEA Hilge

Niederlassung der GEA Tuchenhagen GmbH

Hilgestraße 37–47, 55294 Bodenheim, Germany

Registered Office: Büchen, Court of Registration: HRB 836 SB in Lübeck

Management Board: Tobias Dieckmann, Michael Wulle, Oliver Hegehofer

VAT-ID: DE 812589019, Tax No.: 105/5857/1004

Flow Components	
Introduction	6
Hygienic Pumps	
Introduction	7
Certificates	18
GEA Hilge DURIETTA 0 Pumps	
Overview	20
Product Range	24
Connection Guide	25
Seals	27
Installation	28
Media Guide	30
Pump Selection Matrix	40
Connection Dimensions	42
GEA Hilge DURIETTA 0	
GEA Hilge DURIETTA 0 K – on Motor Foot	44
GEA Hilge DURIETTA 0 K-SUPER – on Machine Pads	45
Performance Curves	
GEA Hilge DURIETTA 0 – 2-pole, 50 Hz	46
GEA Hilge DURIETTA 0 – 2-pole, 60 Hz	47
Appendix	
Inquiry Sheet	48
Description of Certificates and Test Reports	50
Abbreviations and Terms	51



GEA Flow Components

Keeping your product in motion

Regardless of the application – for our customers product quality and profitability are what matters. This is what GEA Flow Components is known for. Our engineers are specialists in everything that flows.

GEA Group

GEA is one of the largest technology suppliers for food processing and a wide range of other industries. The global group specializes in machinery, plants, as well as process technology and components. GEA provides sustainable solutions for sophisticated production processes in diverse end-user markets and offers a comprehensive service portfolio.

GEA Flow Components

In addition to our hygienic pump portfolio, our range of sophisticated process components also includes hygienic and aseptic valves as well as cleaning technology.

All components and services are available worldwide through the international GEA sales network.



Around one quarter of the milk processed is handled by GEA equipment



Roughly every second liter of beer is brewed using GEA equipment and solutions



Every fourth liter of human blood is handled by GEA equipment



Approx. one in three instant coffee lines has been built by GEA

GEA Hilge Hygienic Pumps – The heart of every process

GEA Hilge offers a versatile range of centrifugal and positive displacement pumps for a wide variety of sensitive applications in the beverage, food and pharmaceutical industries.

Our pumps with their sophisticated design ensure particularly gentle conveyance of the respective medium, offer lasting reliability and are characterized by economic efficiency. After all, hygienic pumps are used in processes that directly affect the product and production. They are the heart of every process.

State-of-the-art pump technology, made to our customers' preferences

At the GEA Hilge Hygienic Pumps Center of Competence in Bodenheim we develop innovative pumps and processes together with our customers. Our decades of up-close experience with operations and systems at our customers' production sites ensure optimum selection and configuration of the right pumps for every application (e.g. food and dairy, brewery and beverage, pharmaceutical and biotech, personal and home care).

Maximum efficiency

Two product lines, GEA VARIPUMP and GEA SMARTPUMP, enable our customers to choose from a highly versatile pump range with a multitude of smart adaption options to achieve simpler operation, higher-quality production, and reduced consumption of valuable resources. Special construction features of our many types of pumps provide for exceptionally gentle product handling, delivering top-quality products to consumers.

Maximum reliability


Our customers rely on the safe, continuous operation of their production processes without unplanned breaks or disturbances. That is why GEA pumps are optimized for uncompromising reliability in all applications. Thanks to their robust design and long service life, they are known as "workhorses" for their ease of maintenance and outstanding service, proven over decades, and for the great number of pumps currently in operation. Of course, GEA pumps also comply with all relevant hygiene standards and norms with continuous documentation and up-to-date certifications safely ensuring judicial security.



Two modern pump lines for maximum efficiency

Two product lines, GEA VARIPUMP and GEA SMARTPUMP, form a highly versatile pump range with a multitude of adaption options to ensure simpler operation, higher-quality production, and reduced consumption of valuable resources.

Selecting and configuring the right pump requires a high level of experience. The selection matrix provides initial guidance.

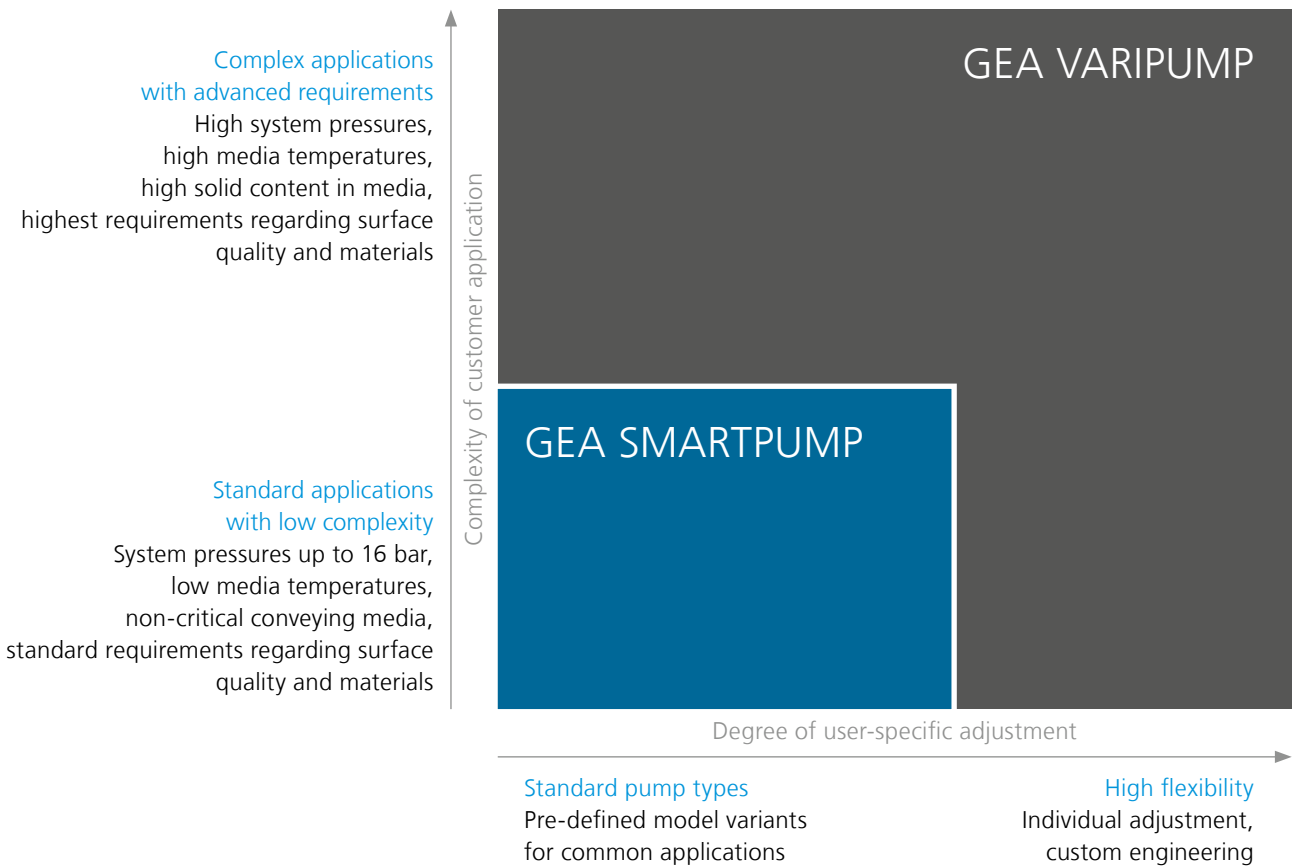

GEA VARIPUMP

The pump series in the GEA VARIPUMP line have been conceived for extreme application demands. The pumps are individually optimized by GEA for each task.

GEA VARIPUMP models are made entirely without die-cast components, offering high-quality surfaces and materials that meet stringent demands even in the sensitive pharmaceutical industry, further ensured by complementing services, e.g. Witnessed Factory Acceptance Test (FAT).

With a great variety of set-up and customizing options the pumps can be adapted individually to any production process, for lower operational costs and maximum system efficiency.

- Developed for advanced application conditions
- Project-specific customization
- Surface roughness up to $R_a \leq 0.4 \mu\text{m}$
- Product-wetted materials according to specific requirements (e.g. no cast parts, $F_e \leq 1\%$ optional)


GEA SMARTPUMP

The GEA SMARTPUMP line comprises highly standardized and attractively priced pump series for common, often-used applications at standard conditions. The pumps are easy to select and ready for fast delivery. Within pre-defined parameters, the standard models can be configured to individual tasks.


The modular construction using high-value materials, the proven “Hygienic Design” and easy-to-apply standardized spare parts all recommend GEA SMARTPUMP pumps for use in cost-critical production systems – at no compromise in terms of quality.

- Application for common and clearly defined “standard” process tasks
- Simple selection and configuration
- Fast delivery
- Standardized spare parts


Self-priming Pumps 50 Hz

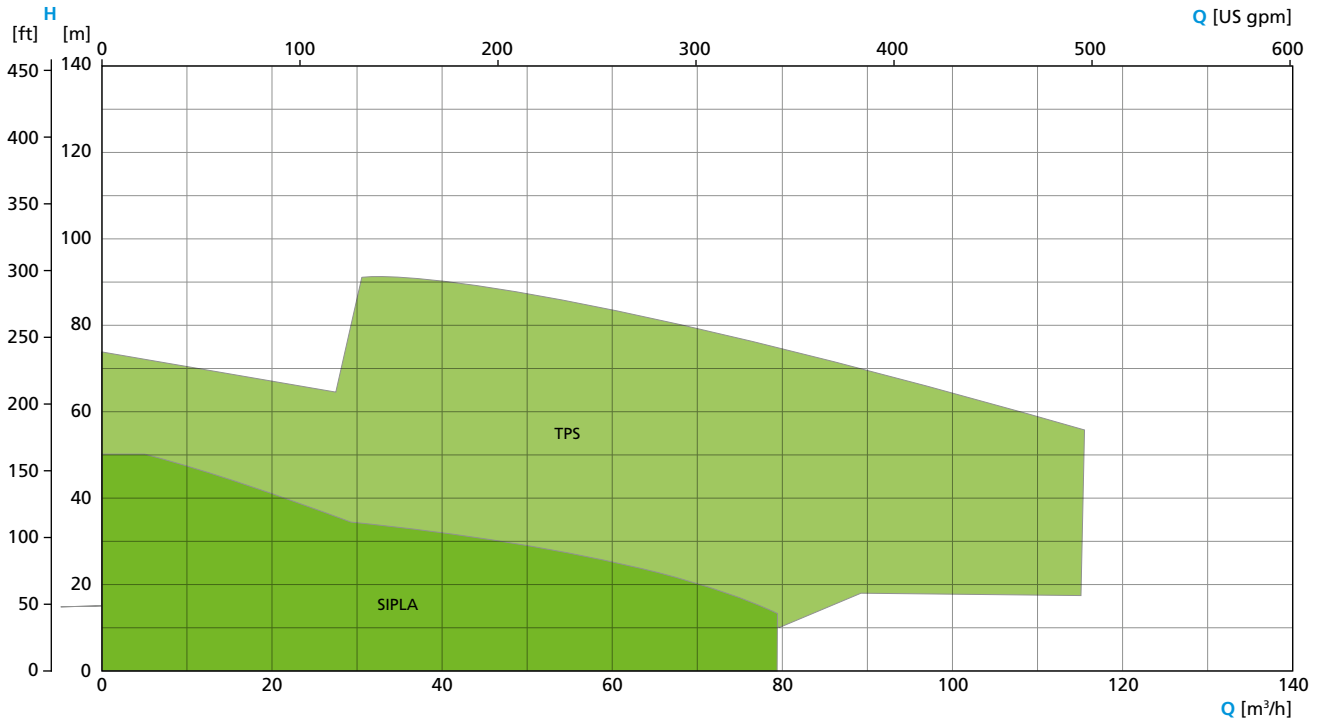


Self-priming Pumps 60 Hz

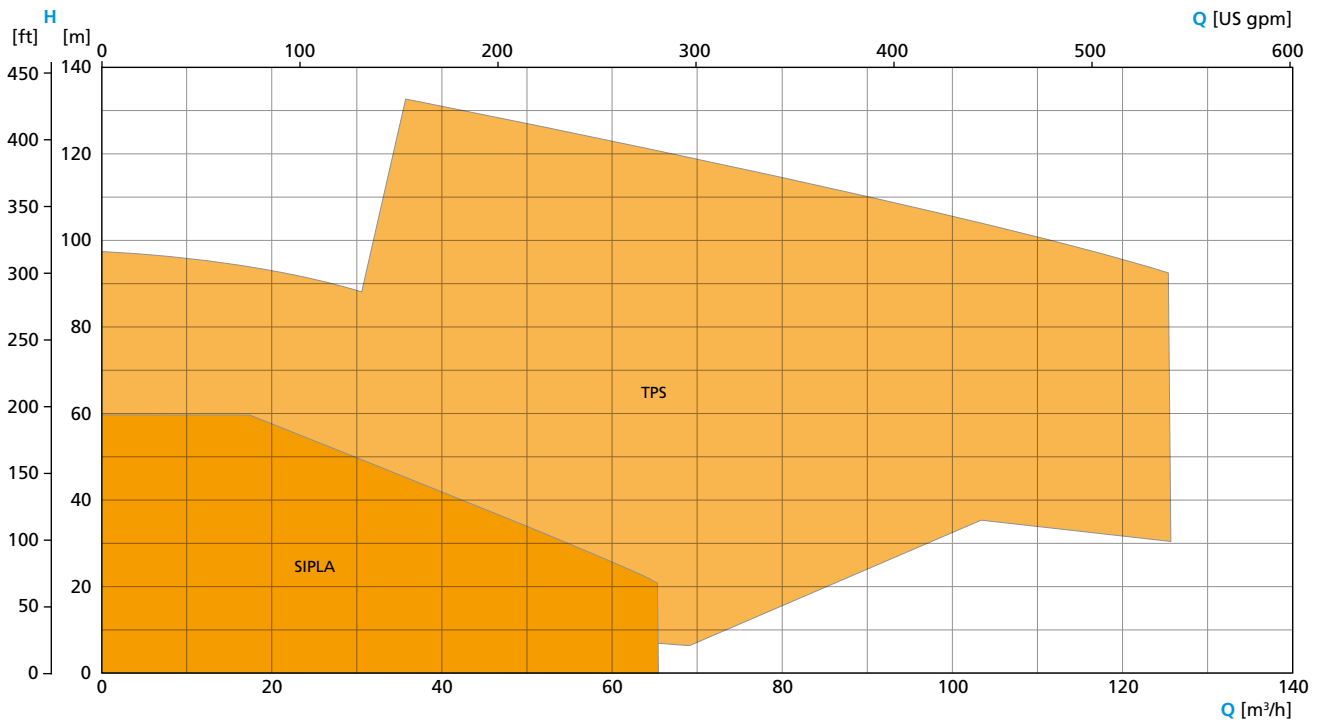


Centrifugal Pumps
2-pole, 50 Hz

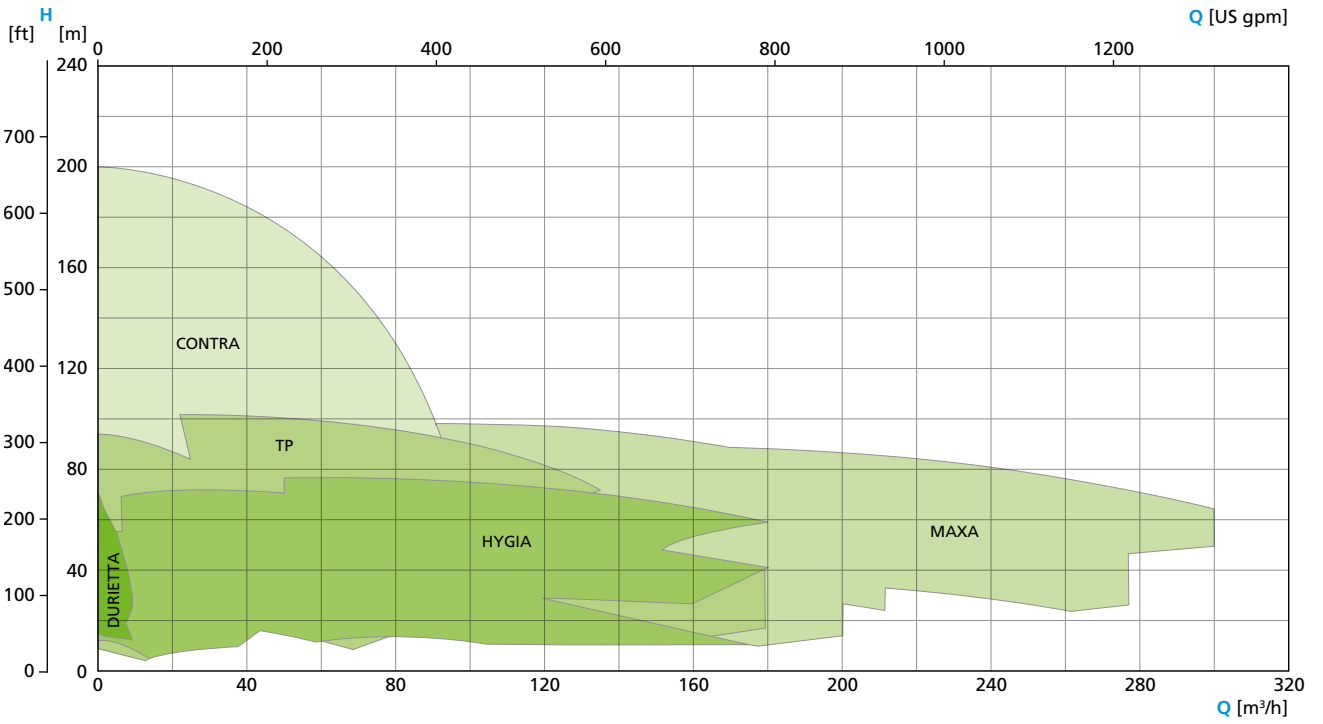


Centrifugal Pumps
2-pole, 60 Hz

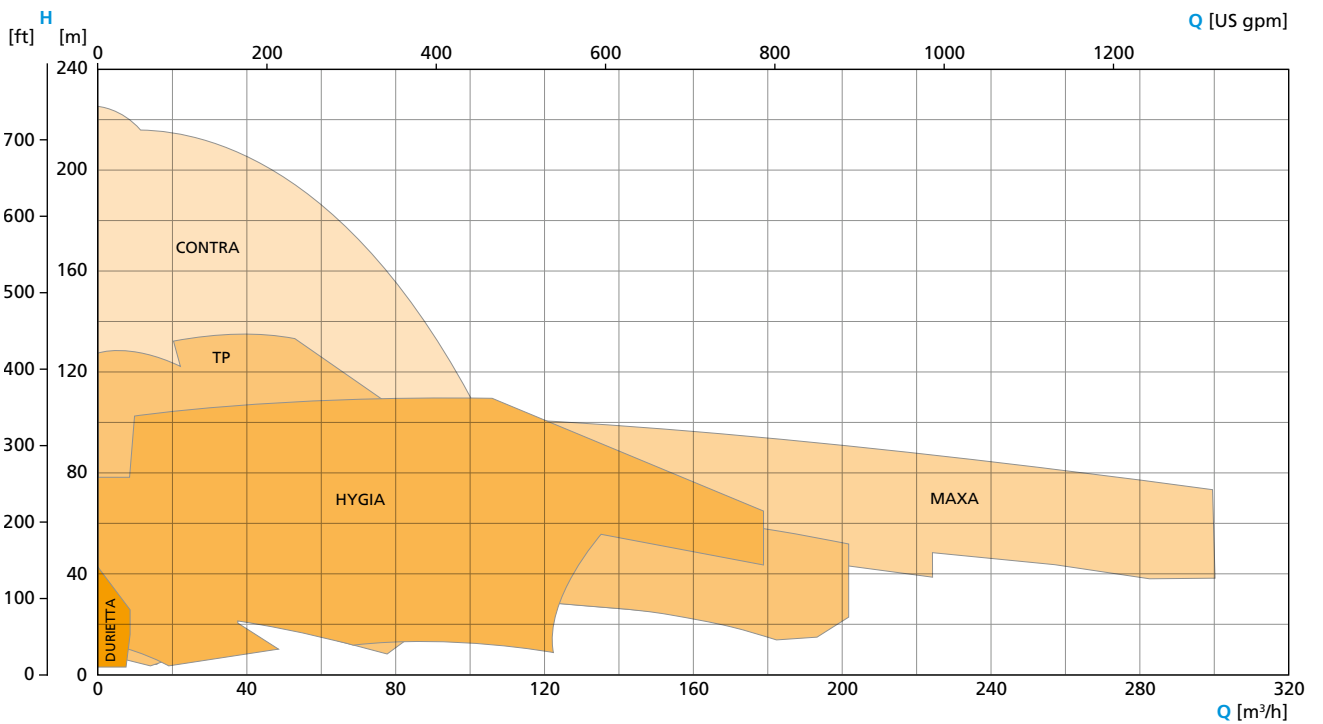


Centrifugal Pumps
4-/6-pole, 50 Hz

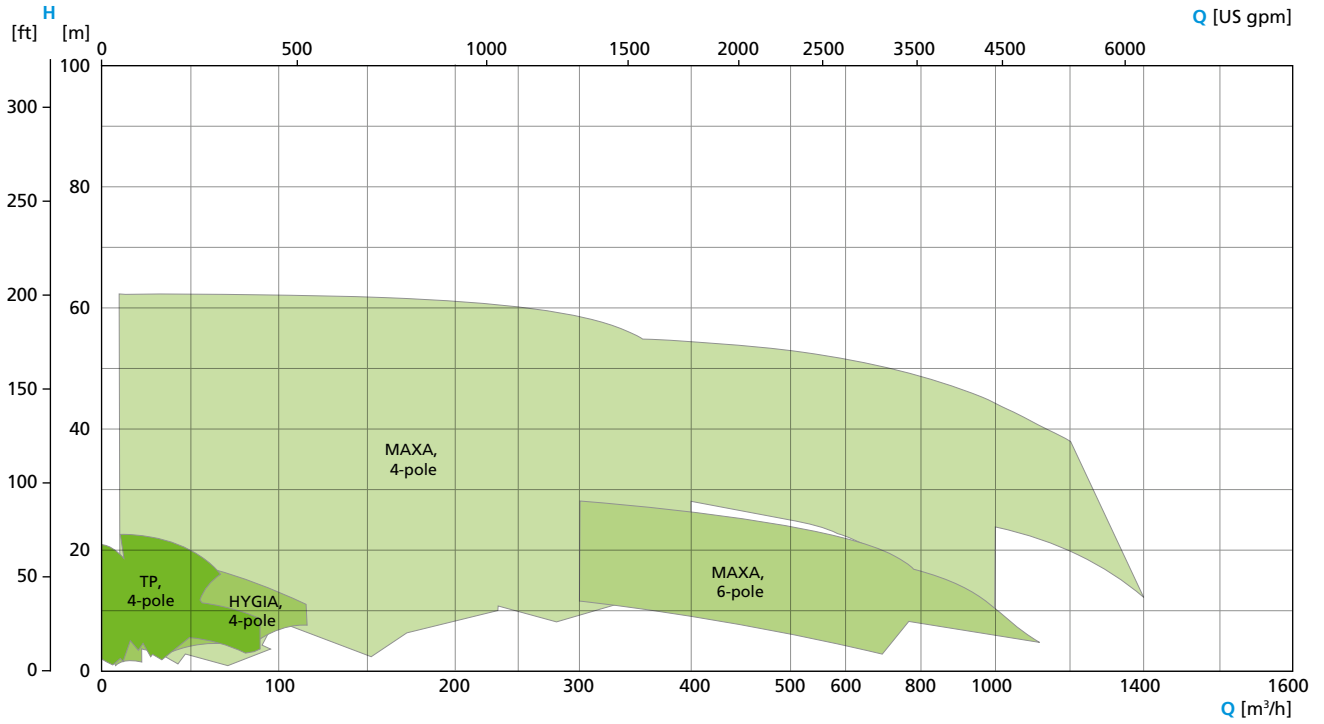


Centrifugal Pumps
4-/6-pole, 60 Hz

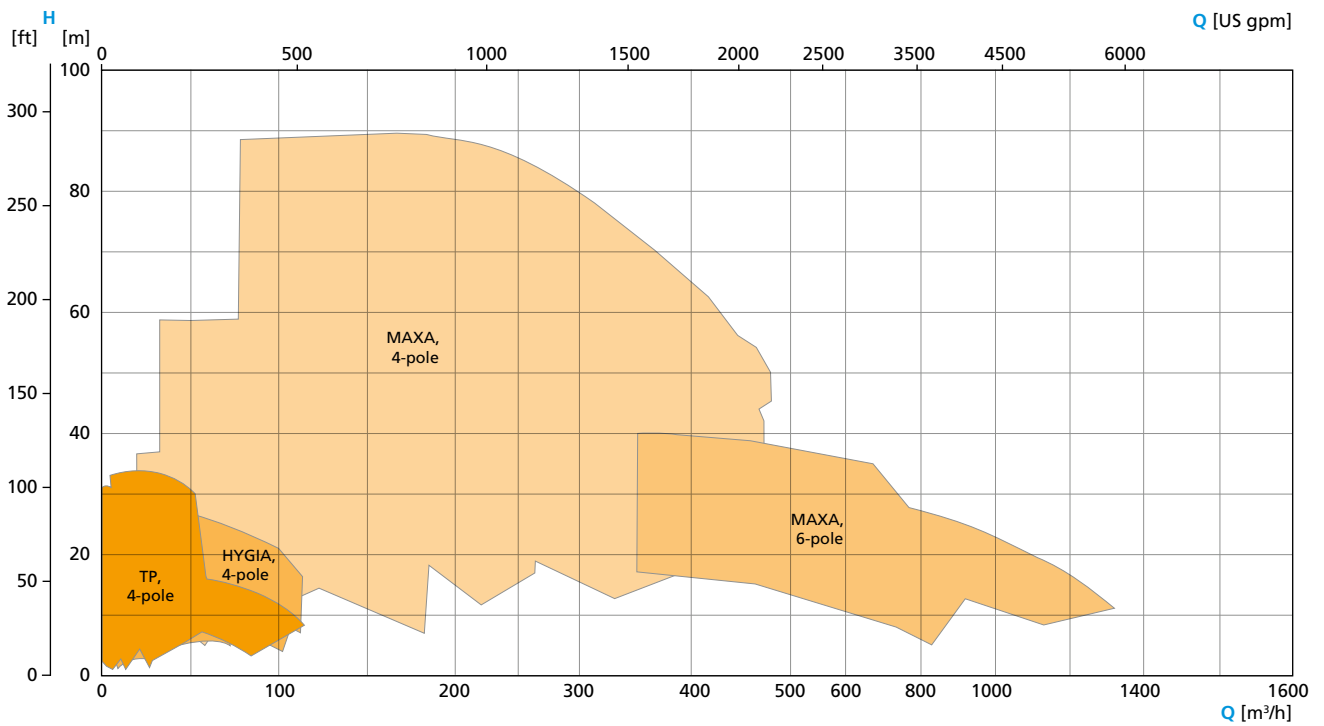


High-pressure Pumps
50 Hz

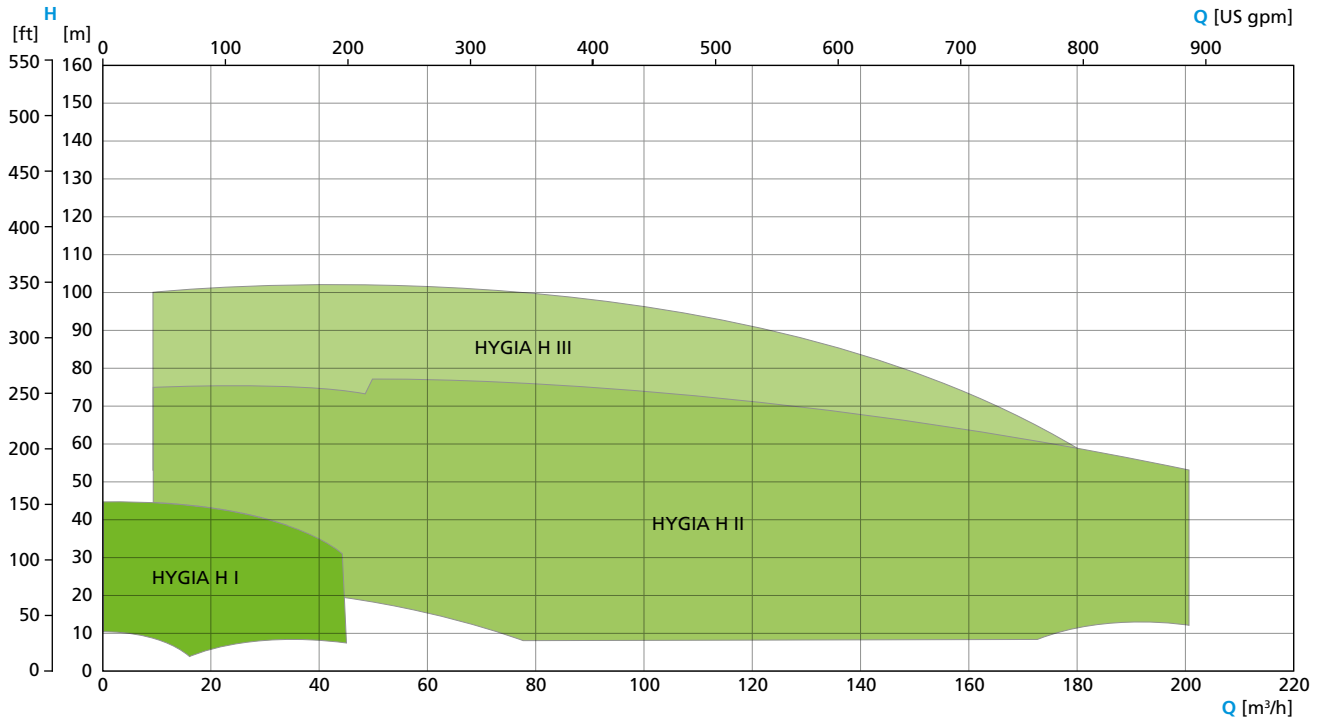


High-pressure Pumps
60 Hz

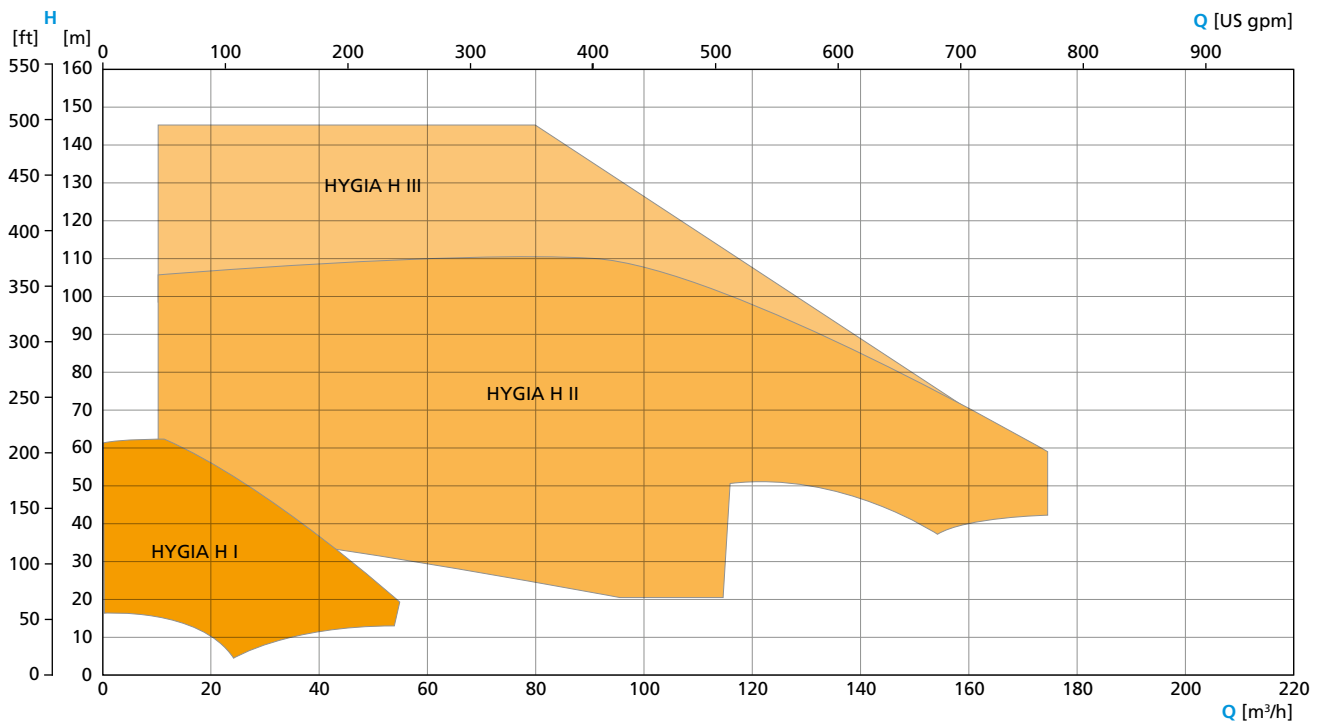

Rotary Lobe Pumps

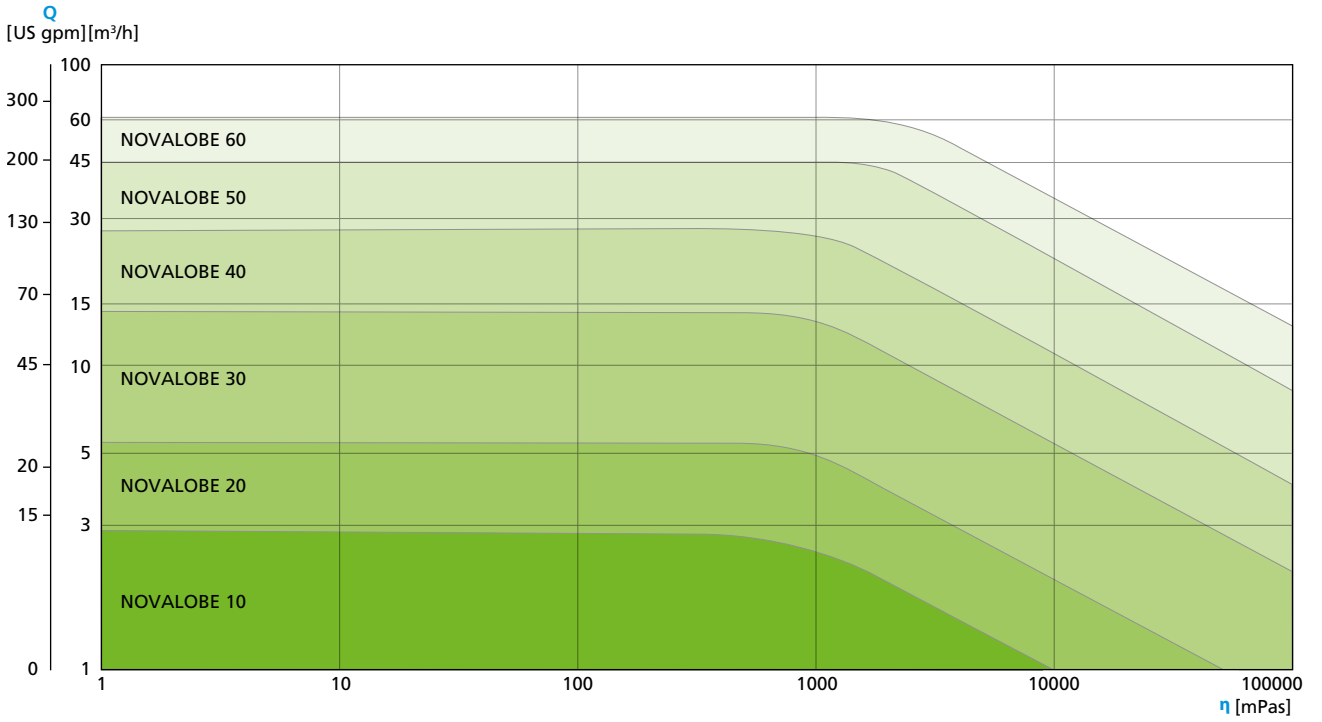

Twin Screw Pumps

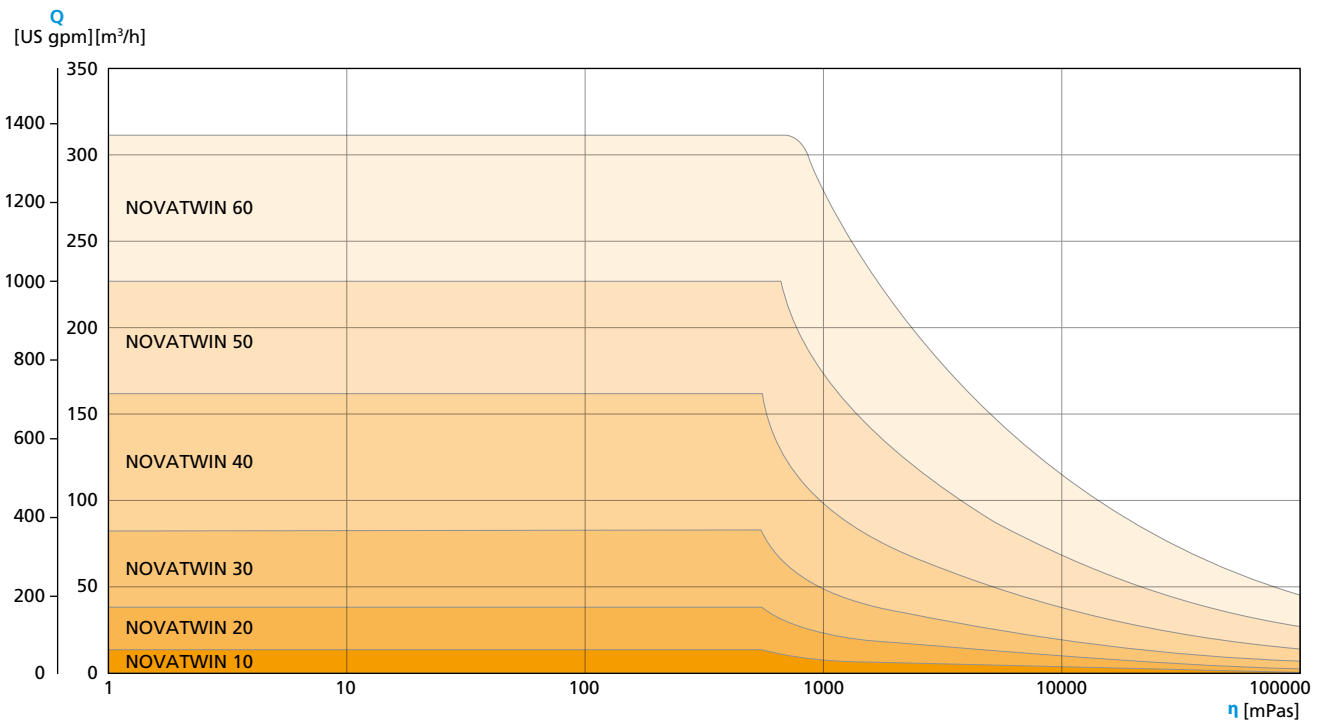

GEA Hilge HYGIA/HYGIA H

The “Swiss Knife” among the hygienic pumps. Premium quality and highest flexibility of customization ensure successful application in the food, beverage, and pharma industries.

Technical data	50 Hz	60 Hz
Max. flow rate	200 m³/h	175 m³/h
Max. head	100 m	145 m
System pressure	16 / 25 / 64 bar	



GEA Hilge HYGIA

GEA Hilge MAXA

A single-stage centrifugal pump designed for heavy-duty operation in industrial processes. The major dimensions and characteristics of these pumps correspond to DIN EN 733 and DIN EN 22858.

Technical data	50 Hz	60 Hz
Max. flow rate	1,450 m³/h	1,320 m³/h
Max. head	100 m	100 m
System pressure	10 bar	




GEA Hilge MAXA

GEA Hilge SIPLA

A single-stage self-priming side channel pump, especially suited for SIP/CIP return systems and applications with high gas content. Right- and left-hand rotation can be freely adjusted for additional application options.

Technical data	50 Hz	60 Hz
Max. flow rate	78 m³/h	64 m³/h
Max. head	47 m	60 m
System pressure	10 bar	

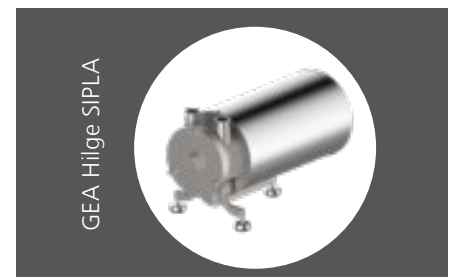

GEA Hilge SIPLA

Single-stage end-suction centrifugal pumps

Single-stage self-priming centrifugal pumps




GEA Hilge TP

GEA Hilge TP

The GEA Hilge TP is the smart solution for standard applications. The single-stage centrifugal pump suits a wide range of applications and offers uncompromising hygiene and quality.

Technical data	50 Hz	60 Hz
Max. flow rate	170 m³/h	205 m³/h
Max. head	90 m	135 m
System pressure	16 bar	

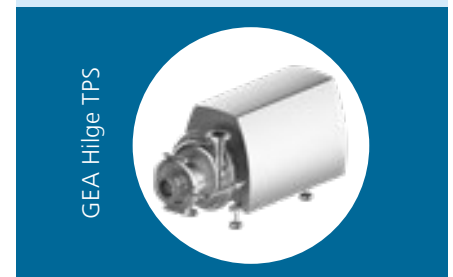

GEA Hilge TPS

GEA Hilge TPS

This self-priming centrifugal pump is the solution of choice especially for emptying tanks as well as for conveying products containing gas, e.g. CIP return systems.

Technical data	50 Hz	60 Hz
Max. flow rate	115 m³/h	125 m³/h
Max. head	95 m	138 m
System pressure	16 bar	

GEA Hilge CONTRA

Single- and multi-stage centrifugal pumps are available in this series. The hygienic design in every detail provides perfect solutions to numerous tasks in sterile and hygienic processes.

Technical data	50 Hz	60 Hz
Max. flow rate	100 m ³ /h	100 m ³ /h
Max. head	200 m	230 m
System pressure	25 bar	

GEA Hilge NOVALOBE

This rotary lobe pump has been specifically designed for highly viscous media – and for applications where gentle pumping is required. The pump is fully drainable with vertical ports.

Technical data	50/60 Hz
Max. displacement	2.1 l/rev
Max. differential pressure	16 bar
System pressure	10/16 bar


GEA Hilge NOVATWIN

The GEA Hilge NOVATWIN is a flexible twin screw pump. It fulfills the highest hygienic standards for gentle product handling as well as CIP with one pump only.


Technical data	50/60 Hz
Max. flow rate	310 m ³ /h
Max. differential pressure	25 bar
System pressure	up to 30 bar



Multi-stage centrifugal pumps

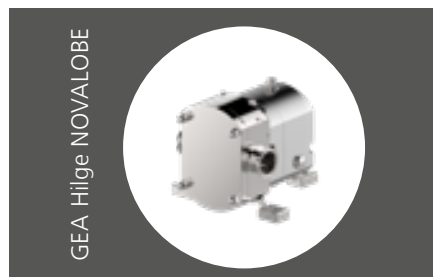


Rotary-lobe pumps

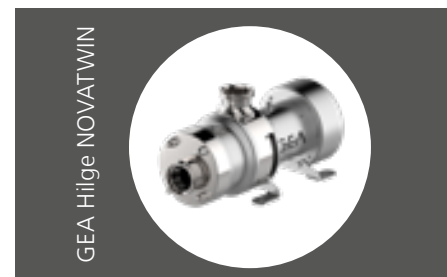

Twin-screw pumps

Positive displacement pumps

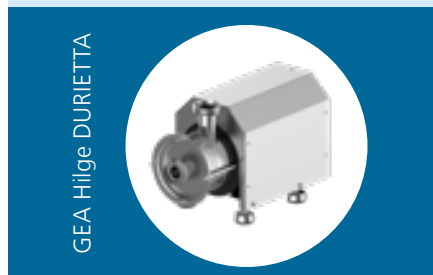**GEA Hilge DURIETTA**

This end-suction single- or multi-stage centrifugal pump in a very compact design has been created for applications with low flow rates at high flow heads.

Technical data	50 Hz	60 Hz
Max. flow rate	8 m ³ /h	8 m ³ /h
Max. head	72 m	41 m
System pressure	8 bar	


The certificates listed here are valid for corresponding GEA pump models. Pumps conforming to the requirements of the European Hygienic Engineering and Design Group (EHEDG) as well as 3-A Sanitary Standards, Inc. (3-A SSI) are available for numerous fields of application.

Moreover, independent, standardized tests have confirmed the efficient, problem-free cleaning ability of numerous pumps – for optimum safety and economic gain.

EHEDG certificates apply only to the specific pump type as listed. However, they may be transferred to specific other pump types, owing to identical housing designs and flow path geometries.

Document	GEA Hlge HYGIA / HYGIA H	GEA Hlge TP / TPS	GEA Hlge CONTRA	GEA Hlge MAXA	GEA Hlge DURIETTA	GEA Hlge SIPLA	GEA Hlge NOVALOBE	GEA Hlge NOVATWIN
3-A Sanitary Standard	•••	•						•
EHEDG certificate	•*	•*	•*				•*	•*
FDA declaration of conformity	•	•	•	•	•	•	•	•
Declaration of compliance with the order 2.1 acc. to EN 10204	•		•	•	•	•	•	•
Test report 2.2 acc. to EN 10204	•	•	•	•	•	•	•	•
Inspection certificate 3.1 acc. to EN 10204	•	•	•	•		•	•	•
EAC-Certificate	•*	•	•	•	•	•	•	•
Surface roughness test report	•	•	•	•			•	•
Delta ferrite test report	•		•				•	•
Acoustic measurement test report	•	•	•	•	•	•	•	•
USP Class VI – declaration of conformity	•	•	•			•	•	•
Certificate in acc. with the regulation (EG) No. 1935/2004	•	•	•	•	•	•	•	•
Certificate DIN EN ISO 9001:2015	•	•	•	•	•	•	•	•

Many more certificates on request
 Subject to change without notice.
 * registered for certification/recertification
 ** HYGIA H III registered for certification

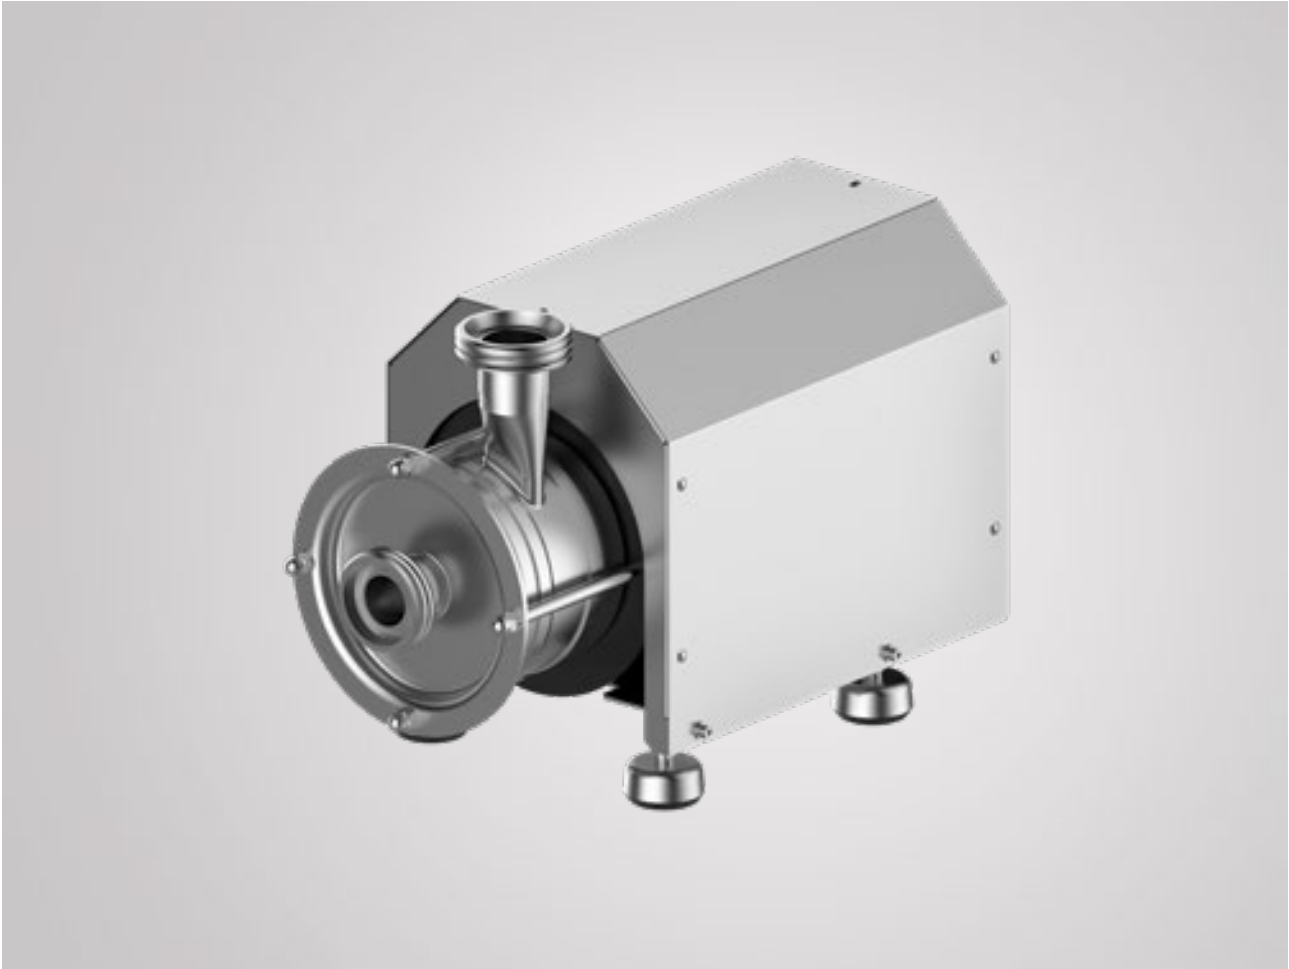

GEA Hilge DURIETTA 0 K-SUPER on Stainless Steel Adjustable Feet

Features and benefits

- Fast delivery time thanks to a standardized product portfolio.
- Different sealing systems for optimal solutions in different applications.
- High head pressures and high efficiency due to the multi-stage design.
- Good flow and pressure control thanks to the steep performance curve.
- Process safety, reliability, and optimal cleanability, due to sterile, cast-free stainless steel, deep-drawn variant without blowholes (Hygienic Design).
- Versatile use with the mobile pump version.
- Favorable wear parts inventory with the GEA Hilge cross-series sealing concept.

Technical Data

	50 Hz	60 Hz
Flow rate	8 m³/h	
Head	72 m	41 m
Operating pressure	up to 8 bar	
Operating temperature	90 °C	
Sterilization temperature	150 °C (SIP)	
Max. pump efficiency	45 %	35 %

Applications

The GEA Hilge DURIETTA 0 pump range is suitable for the following application areas and products, due to the hygienic design and material selection:

Food and beverage industry

- Breweries (beer, wort, mash, yeast, etc.)
- Distilleries (mash, distillates, etc.)
- Food manufacturing (marinades, brine, cooking oil, etc.)
- Cleaning in Place systems (CIP)

Design

GEA Hilge DURIETTA 0 pumps are compact, single- and multi-stage, centrifugal pumps, designed to meet the requirements of hygienic processes.

The pump casing is made of CrNiMo steel 1.4404/1.4435. The pumps have a mechanical seal and a fan-cooled asynchronous motor to enclosure class IP55.

The pumps are CIP-capable in compliance with the DIN EN 12462 performance criteria.

Pump Connections

GEA Hilge offers the following standard connections for the GEA Hilge DURIETTA pump range:

- Thread according to DIN 11851
- Flanges according to DIN 11864-2

You can find additional information in the connection selection guide on page 25.

Impeller

The pump type series DURIETTA 0 is offered with a semi-open impeller.


Semi-open impeller



Impeller version	Surface finish
Welded	R _a ≤ 3.2 µm

The impeller is suitable for low-viscosity liquids and liquids containing low content of particles.

Materials

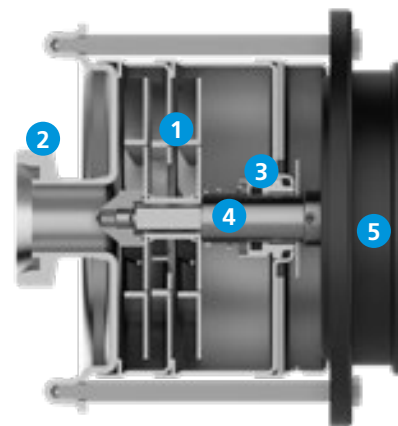

Material overview GEA Hilge DURIETTA 0

Item	Component	Material	No.
1	Impeller	CrNiMo steel	316L (1.4404/1.4435)
2	Pump casing	CrNiMo steel	316L (1.4404/1.4435)
3	Seal	SiC/SiC or carbon/ stainless steel	
4	Pump shaft	CrNiMo steel	316Ti (1.4571)
5	Motor	Aluminium	
	Shroud	Stainless steel	
	Foot	Stainless steel	1.4301

Coating

Components not made of stainless steel are provided with one of the following coatings, depending on the design:

Version	Paint/coating	Coating thickness
Primer	2K epoxy resin	30–60 µm
	KTL coating	15–20 µm
Top coating	2K epoxy resin	50–70 µm
	2K polyurethane color	60 µm
	KTL coating	15–20 µm

Surface design

Selected components are electro-polished in order to improve the surface and protect it against corrosion.

Surface	Electro-polished components
$R_a \leq 3.2 \mu\text{m}$	Casing parts, impeller

Lantern (motor stool) not electro-polished.

Mechanical seal

GEA Hilge offers the following seal designs:

- Single mechanical seal
- Double mechanical seal, tandem

The pumps of the GEA Hilge DURIETTA 0 range are equipped with single internal mechanical seals optimally arranged in the pump.


This ensures efficient lubrication and cooling of the mechanical seal. CIP and SIP-capability is fulfilled according to hygienic design criteria.

The standard material for the mechanical seals is carbon/stainless steel with EPDM elastomers. Other executions and materials are available on request.

For further information on mechanical seals, see page 27.

Positioning of discharge port and terminal box

For pumps with HPM-casing only the positions 3, 12 and 9 o'clock are possible.

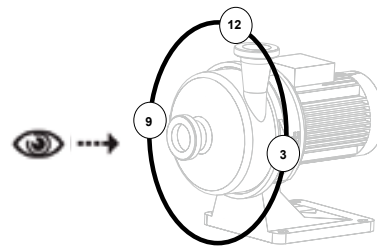

Positioning of discharge port and terminal box for horizontal pumps

Noise emissions

Measured values according to DIN EN ISO 3746 for pump units, measurement uncertainty 3 dB (A).

Motor power [kW]	Poles	Lpfa [dB (A)]					
		Stages					
		1	2	3	4	5	6
0.25	4	57	–	–	–	–	–
0.55	2	60	–	–	–	–	–
0.75		60	61	62	–	–	–
1.5		–	63	64	64	–	–
2.2		–	64	65	66	69	71

The noise emissions of a pump are significantly affected by the given application. The values given here therefore serve only as a guide. Please contact GEA for more detailed information.

Design variants

Standard version	Description
GEA Hilge DURIETTA 0 K	Horizontal installation, bloc version with standard motor
GEA Hilge DURIETTA 0 K-SUPER	Horizontal installation, bloc version with standard motor and stainless steel shroud

Design K

GEA Hilge hygienic pumps in compact K design require small installation space. The pump is equipped with a plug-in shaft.

The modular design enables numerous installation designs. Pumps in the K-SUPER design are equipped with stainless steel shrouds.



GEA Hilge DURIETTA 0 K on Motor Foot



GEA Hilge DURIETTA 0 K-SUPER on Machine Pads

Type code

GEA Hilge DURIETTA 0	4	A	KS	32	25	3.2 µm
Pump range						
Stages						
3-A/non 3-A						
Design						
Diameter suction side						
Diameter pressure side						
Surface roughness						

Motors

Motor power [kW]	GEA Hilge DURIETTA 0	
	2-pole [frame size]	4-pole [frame size]
0.25	–	71
0.55	71	–
0.75	71	–
1.5	90S	–
2.2	90L	–

Motor power [kW]	4-pole	2-pole				
	1-stage	2-stage	3-stage	4-stage	5-stage	6-stage
0.25						
0.55						
0.75						
1.5						
2.2						

For the blue marked versions are no motors available.

Motor protection

Three-phase motors should be connected to a motor-protective circuit breaker.

All three-phase mains-operated standard motors can be connected to an external frequency converter. When a frequency converter is connected, the motor isolation is often overloaded, making the motor louder than during normal operation. In addition, large motors will be exposed to bearing currents caused by the frequency converter.

The following should be taken into account when operating a frequency converter:

- In the event of special noise protection requirements, motor noise can be reduced by using a dU/dt filter between the motor and the frequency converter. For noise-sensitive environments, we recommend using a sinus filter.
- The length of the cable between motor and frequency converter affects the motor load. For this reason, check whether the cable length corresponds to the specifications issued by the supplier of the frequency converter.
- For supply voltages between 500 and 690 V, fit either a dU/dt filter to reduce voltage peaks, or use a motor with reinforced insulation.
- For supply voltages of 690 V, use a motor with reinforced insulation, and fit a dU/dt filter.

Design

The motors are totally enclosed, fan-cooled standard motors with main dimensions according to IEC and DIN standards. Electrical tolerances according to IEC 60034.

Pump range	Design – IEC 60034-7 Horizontal installation
GEA Hilge DURIETTA 0	IM 2101 (IM B34)

Relative air humidity: Max. 95 %
 Enclosure class: IP55
 Insulation class: F according to IEC 85
 Ambient temperature: Max. 40 °C (standard motor)

In humid locations, the lowest drain hole in the motor must be opened. In such cases, the motor enclosure class is IP44.

Selecting according to the application


The table below is intended as a general guide. Selection of connection often depends on on-site conditions.

Connection		Application																				
		Beverages					Food				Life science and personal care			Industrial applications				Cleaning				
Type		Beer	Wine	Juice	Alcohol	Soft drinks	Confectionery	Dairy products	Frying oil	Syrup	Pure water	Biotechnology products	Perfumes and lotions	Glue and paint	Purification products	Chemical products	Industrial wastewater and efflux	Surface treatment products	Biofuel	CIP	SIP	
Threads	Threaded connection DIN 11851	•	•	•	•	•	•	•	•	•										•	•	
	Threaded connection SMS	•	•	•	•	•	•	•	•	•											•	
	Threaded connection RJT	•	•	•	•	•	•	•	•	•											•	
Flanges	Aseptic flange DIN 11864-2/11853-2	•	•	•	•	•	•	•	•	•	•	•	•								•	•
	Flange APV-FN1/APV-FG1	•	•	•	•	•	•	•	•	•											•	
	Flange DIN EN 1092-1	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•
Clamps	Clamp DIN 32676							•			•	•	•							•	•	

Design

The following tables show the design of the different connection types.

Clamps

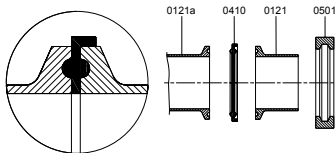Applications	Standard	Design	Description of the components
<ul style="list-style-type: none"> • Food Industry • Biotechnology / Pharmaceutical Industry 	DIN 32676		0121a: Clamp connection at pump casing 0121: Clamp connection 0410: Profile gasket 0501: Clamp ring

Flanges

Applications	Standard	Design	Description of the components
Aseptic Flange			
<ul style="list-style-type: none"> • Biotechnology / Pharmaceutical Industry • Beverage Industry 	DIN 11864-2/ 11853-2 Form A		0122a: Flanged connection at pump casing 0122: Flanged connection 0412: O-ring 0901: Hexagon head screw 0920: Hexagon nut
Flange			
<ul style="list-style-type: none"> • Food Industry • Beverage Industry 	APV-FN1/ APV-FG1		0122a: Flanged connection at pump casing 0122: Flanged connection 0410: Profile gasket 0901: Hexagon head screw 0920: Hexagon nut
Kremo Flange			
<ul style="list-style-type: none"> • Industrial Applications 	DIN EN 1092-1 (loose)		0122a: Flanged connection at pump casing 0122: Flanged connection 0400: Gasket 0901: Hexagon head screw 0920: Hexagon nut

Threads

Applications	Standard	Design	Description of the components
Thread			
<ul style="list-style-type: none"> • Beverage Industry • Food Industry 	DIN 11851		0120a: Threaded connection at pump casing 0120: Threaded connection 0411: Joint ring 0925: Grooved union nut
<ul style="list-style-type: none"> • Beverage Industry • Food Industry 	SMS (ISO 2037 DS 722)		0120a: Threaded connection at pump casing 0120: Threaded connection 0411: Joint ring 0925: Grooved union nut
<ul style="list-style-type: none"> • Beverage Industry • Food Industry 	RJT (BS 4825-5)		0120a: Threaded connection at pump casing 0120: Threaded connection 0412: O-ring 0925: Grooved union nut

In order to ensure correct operation (depending on the application and the medium), single or single mechanical flushed seal systems can be supplied. The mechanical seal is optimally placed inside the pump. This ensures efficient lubrication and cooling of the mechanical seal, while also

ensuring CIP (Cleaning In Place) and SIP (Sterilization In Place) capability. The standard material for the mechanical seals are carbon/stainless steel or SiC/SiC with EPDM or FKM (Viton) elastomers.

Mechanical seals



The operating range of the seal depends on the liquid, the type of seal, the operating pressure and the liquid temperature.

The seal types described below are standard seal types; other seals are available on request.

Version	Material pairs stationary seat/seal face/O-rings	Max. pressure	Max. temperature
Open spring	Carbon/stainless steel/EPDM Carbon/stainless steel/FKM Silicon carbide/silicon carbide/EPDM Silicon carbide/silicon carbide/FKM	10 bar	-20 to 80 °C

Special seals available in different materials up to 25 bar.


Mechanical seal arrangements

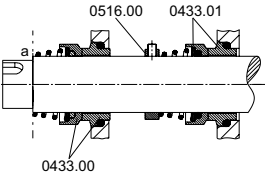Arrangement	Design	Components	Seal characteristics
Single mechanical seal with open spring		0433.000: Mechanical seal a: Contact surface impeller side	<ul style="list-style-type: none"> • Open conical spring • Optimal position inside the pump
Double mechanical seal, tandem		0433.00: Mechanical seal, product side 0433.01: Mechanical seal, atmosphere side 0516.00: Locating ring a: Contact surface impeller side	<ul style="list-style-type: none"> • Tandem arrangement • Open conical spring • Pressure-less flushing (seal cartridge) • No dry running • Mechanical seals are lubricated and cooled

Mechanical installation

GEA Hilge DURIETTA 0

The pumps of the GEA Hilge DURIETTA 0 can only be installed horizontally.




Installation GEA Hilge DURIETTA 0

The pumps must be installed in such a way that strain from the pipework is not transferred to the pump casing. When installed outdoors, the motor must be provided with a suitable cover to avoid condensation on the electronic components and to protect pump and motor against the direct effects of the elements.

Space requirements

Horizontal installation

- Pumps fitted with motors up to and including 4 kW require a 300 mm clearance behind the motor.

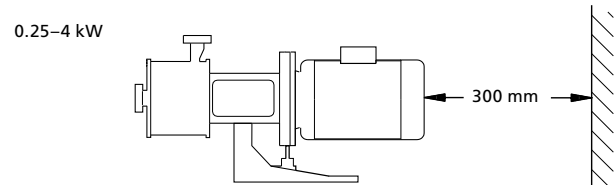

Horizontal installation


Elimination of noise and vibrations

In order to achieve optimum operation and minimum noise and vibration, consider vibration dampening of the pump. Generally, always consider this for pumps with motors above 11 kW. Smaller motors, however, may also cause undesirable noise and vibration.

Noise and vibration are generated by the rotation in the motor and pump and by the flow in the pipework and fittings. The effect on the environment is subjective and depends on correct installation and the state of the remaining system.

Foundation

Vibration dampening is best achieved by installing the pumps on a plane and rigid concrete foundation.

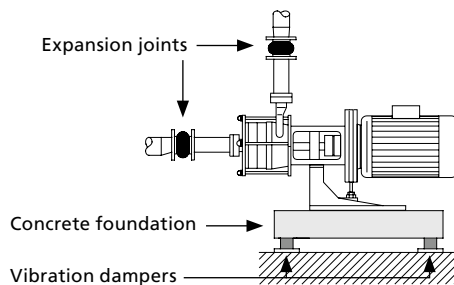

Example of a pump foundation

As a guideline, the weight of the concrete foundation should be 1.5 times the pump weight.

Vibration dampers

To prevent vibrations from being transmitted to the building, we recommend that you isolate the pump foundation from buildings by means of vibration dampers.

The selection of the correct vibration dampers requires the following data:

- Forces that will be transmitted through the vibration dampers
- Motor speed, taking speed control into account as needed
- Required dampening in % (suggested value is 70 %).

The right damper varies from installation to installation, and the wrong damper may increase the vibration level. Vibration dampers should therefore be sized by the supplier.

Expansion joints

If the pump is installed on a pedestal with vibration dampers, expansion joints must always be fitted on the pipeline connections. This is important to prevent the pump from "hanging" in the connections.

Install expansion joints in order to

- absorb expansion/contractions in the pipework caused by variable liquid temperatures
- reduce mechanical strains that occur in connection with pressure surges in the plant
- isolate mechanical structure-borne noise in the pipework (only rubber bellows expansion joints).

Note: Do not install expansion joints to compensate for inaccuracies in the pipework such as center displacement of flanges.

Fit expansion joints at a distance of at least 1 to 1.5 times the nominal flange diameter away from the pump on the suction as well as on the discharge side. This will prevent the development of turbulence in the expansion joints, resulting in better suction conditions and a minimum pressure loss on the discharge side.

We always recommend expansion joints with limiting rods for flanges larger than DN 100/4".

The pipes should be anchored so that they do not stress the expansion joints and the pump. Follow the supplier's instructions and pass them on to advisers or pipe installers.

The values for density and viscosity given here are ratios and can deviate in practice.

Application beer

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Altbier	< 100	1,000	1	aeE (up to 10 bar), aiH (from 10 bar)	-
Beer					
Beer mix					
Berliner Weisse					
Bock beer					
Craft beer					
Export beer					
Full beer (Vollbier)					
Green beer					
Herb beer					
Lager					
Light beer					
Martzen (Märzen)					
Non-alcoholic beer					
Pils					
Pilsener					
Ringed (Kräusen)					
Wheat beer					
Cold wort	< 40	< 1,050	< 5	aeE (up to 10 bar), aiH (from 10 bar)	-
Original wort	< 100	< 1,050	< 5	-	kiE/aeE
Hop extract (dissolved)	< 100	< 1,050	< 5	-	kiE/aeE
Lees	40-90	< 1,050	< 5	-	kiE/aeE
Mash (beer)	40-115	< 1,050	< 5	-	kiE/aeE
Lauter wort	< 20	< 1,050	< 100	aeE	-
Hot wort	< 60	< 1,050	< 5	aeE	-
Crop yeast	< 100	< 1,100	< 5	kiV (up to 16 bar), kil (up to 25 bar)	-
Pitching yeast	< 100	< 1,210	< 5	kiV (up to 16 bar), kil (up to 25 bar)	-
Yeast					
Enzymes (watery dissolution)					
Lactic acid, con. < 50 % (C ₃ H ₆ O ₃)					
Lactic acid, con. > 50 % (C ₃ H ₆ O ₃)					

Application water

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Iced water	-4 to +3	< 1,000	1	kiE (up to 10 bar), kiH (from 10 bar)	-
Cold water	< 125	< 1,000	1	aeE (up to 10 bar), aiH (from 10 bar)	-
Deminerilised water (Not for sterile applications)					
Drinking water					
Flushing water					
Hot water					
Mineral water					
Process water					
Service water					
Water					

Application wine/sparkling wine

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Champagne					
Cherry wine					
Cider					
Cidre					
Dry sparkling wine					
Fruit wine					
Prosecco	< 35	< 1,000	1	aeE (up to 10 bar), aiH (from 10 bar)	–
Red wine					
Rosé wine					
Sparkling wine					
Strawberry wine					
White wine					
Wine					
Young wine					
Dessert wine					
Dessert wine, late-harvest wine	< 35	< 1,050	15	aeE (up to 10 bar), aiH (from 10 bar)	–
Drape must (w/o. particles)					
Ice wine					
Wine lees	< 35	< 1,050	100	aeE (up to 10 bar), aiH (from 10 bar)	–
Wine yeast					
Mash (wine)	< 35	< 1,050	5	aeE (up to 10 bar), aiH (from 10 bar)	–

Application coffee/tea/cocoa

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem	Encapsulated seal for vacuum application
Coffee	< 125	1,000	1	aeE	–	
Coffee extract	< 80–100	< 1,200	< 250	–	kiV/aeV	x
Tea	< 125	1,000	1	aeE	–	
Fruit tea / flavored tea	< 125	1,000	1	aeE	–	
Cocoa drink	< 40	1,020	< 10	aeE	–	

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kil: SiC/SiC/Viton (USP Class VI), kiV: SiC/SiC/Viton, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application milk

Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Mechanical seal* material product side / atmospheric side	
				Single	Tandem
Buttermilk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
UHT milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Yoghurt milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Kefir	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Cheese milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Skimmed milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Skimmed milk concentrate	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Milk concentrate	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Lactic culture	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Milk mix	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Whey	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Raw milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Pre-stirred yoghurt	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Sour milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	-
	> 55 - < 100	< 1,050	< 5	-	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Sour cream with thickening agents	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Full cream milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Coffee cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Whipping cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Sour cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Condensed milk	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)

Application vinegar / sauces / marinade

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Soy sauce	5–95	1,250	25	kiE	–
	95.1–125	1,250	25	–	kiE/aeE
Cider vinegar	60	1,020	1	aeE	–
Herb-flavoured vinegar					
Vinegar					
Wine vinegar	60	1,050	1	aeV	–
Vinegar essence					

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), ail: carbon/SiC/Viton (USP-Class VI), kiE: SiC/SiC/EPDM, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application non-alcoholic drink

Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Mechanical seal* material product side / atmospheric side		
				Single	Tandem	Encapsulated seal
Apple juice, without pulp	< 70	1,040	< 50	aeE	–	
Apple juice, with pulp	< 70	1,040	< 50	aeE	–	x
Apple juice, with granules	< 70	1,040	< 50	kiE	–	x
Apple juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Apple juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Apricot-mango juice, without pulp	< 70	1,040	< 50	aeE	–	
Apricot-mango juice, with pulp	< 70	1,040	< 50	aeE	–	x
Apricot-mango juice, with granules	< 70	1,040	< 50	kiE	–	x
Apricot-mango juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Apricot-mango juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Cherry juice, without pulp	< 70	1,040	< 50	aeE	–	
Cherry juice, with pulp	< 70	1,040	< 50	aeE	–	x
Cherry juice, with granules	< 70	1,040	< 50	kiE	–	x
Cherry juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Cherry juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Cola	< 100	1,040	< 5	aeE	–	
Concentrated lemon juice, without pulp and granules	< 70	1,040	25	kiV	–	
Cranberry juice, without pulp	< 70	1,040	< 50	aeE	–	
Cranberry juice, with pulp	< 70	1,040	< 50	aeE	–	x
Cranberry juice, with granules	< 70	1,040	< 50	kiE	–	x
Cranberry juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Cranberry juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Multivitamin juice	< 70	1,040	< 50	kiE	–	x
Fruit juice, with granules	< 70	1,040	< 50	kiE	–	x
Fruit juice, with pulp	< 70	1,040	< 50	aeE	–	x
Fruit juice, with pulp and with granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Fruit juice, without pulp	< 70	1,040	< 50	aeE	–	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Grape juice, without pulp	< 70	1,040	< 50	aeE	–	
Grape juice, with pulp	< 70	1,040	< 50	aeE	–	x
Grape juice, with granules	< 70	1,040	< 50	kiE	–	x
Grape juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Grape juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Iced tea	< 100	1,040	< 5	aeE	–	
Lemon juice, with pulp and granules	< 70	1,040	25	kiV	–	x
Lemon juice, without pulp and granules	< 70	1,040	25	aeV	–	
Lemonade	< 100	1,040	< 5	aeE	–	
Mineral water	< 100	1,040	< 5	aeE	–	
Multivitamin juice, without pulp	< 70	1,040	< 50	aeE	–	
Multivitamin juice, with pulp	< 70	1,040	< 50	aeE	–	x
Multivitamin juice, with granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Multivitamin juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Orange juice, without pulp	< 70	1,040	< 50	aeE	–	
Orange juice, with pulp	< 70	1,040	< 50	aeE	–	x
Orange juice, with granules	< 70	1,040	< 50	kiE	–	x
Orange juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Orange juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Peach- / passion fruit juice, without pulp	< 70	1,040	< 50	aeE	–	
Peach- / passion fruit juice, with pulp	< 70	1,040	< 50	aeE	–	x
Peach- / passion fruit juice, with granules	< 70	1,040	< 50	kiE	–	x
Peach- / passion fruit juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Peach- / passion fruit juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem	Encapsulated seal
Raspberry- / Strawberry juice, without pulp	< 70	1,040	< 50	aeE	–	
Raspberry- / Strawberry juice, with pulp	< 70	1,040	< 50	aeE	–	x
Raspberry- / Strawberry juice, with granules	< 70	1,040	< 50	kiE	–	x
Raspberry- / Strawberry juice, without pulp	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Raspberry- / Strawberry juice, Apple juice, with pulp or granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Vegetable juice, with pulp and granules	< 70	1,050	< 50	kiV	–	x
	> 70 – < 95	1,050	< 10	–	kiV/aeV	x
Vegetable juice, without pulp and granules	< 70	1,050	< 50	aeV	–	
	> 70 – < 95	1,050	< 10	–	kiV/aeV	

Application concentrated fruit juice

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [Brix]	Single	Tandem
Concentrated fruit juice	5–90	1,150	related to temperature	to 25°	aeE (up to 10 bar), aiH (from 10 bar)	–
	5–40	1,200		26–49°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,200		26–49°	–	aeE/aeE
	15–40	1,230		50°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,230		50°	–	aeE/aeE
	15–40	1,260		55°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,260		55°	–	aeE/aeE
	15–40	1,290		60°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,290		60°	–	aeE/aeE
	15–40	1,320		65°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,320		65°	–	aeE/aeE
	20–40	1,350		70°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,350		70°	–	aeE/aeE

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kiV: SiC/SiC/Viton, WDR: lip sea. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application oil & fat

				Mechanical seal* material product side / atmospheric side						
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem					
Cocoa butter	10–30	940	< 80	aeV	–					
Coconut oil / copra oil										
Corn oil										
Cotton seed oil										
Linseed oil										
Olive oil										
Palm oil										
Peanut oil										
Pumpkin seed oil										
Rape oil / rapeseed oil										
Safflower oil										
Sesame oil						30.1–125	920	< 40	aeV	–
Soy oil / soy bean oil										
Sunflower oil										
Walnut oil										
Wheat germ oil										
Butter oil (liquid)	> 45–120	860	45	aeV	–					
Lard (liquid)	> 45–120	860	45	aeV	–					
Liquid butter	> 35–120	860	45	aeV	–					
Fish oil	10–125	950	< 100	aeV	–					
Whale oil	10–125	950	< 100	aeV	–					
Cod liver (cod-liver oil)	10–125	950	< 100	aeV	–					
Mineral oil	10–100			aeV	–					
Motor oil										
Petroleum										
Derv	10–100	850	< 15	aeV	–					
Diesel oil										
Oil-in-water emulsion						0–100	1,000	< 50	aeV	–

Application cleaning in place CIP

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [%]	Single	Tandem
CIP liquid (concentration approx. 5%)	< 100	1,050	< 5	< 5	aeE (up to 10 bar), aiH (from 10 bar)	–

Application sugar syrup

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [Brix]	Single	Tandem
Sugar syrup without crystals	5-90	1,150	related to temperature	to 25°	aeE (up to 10 bar), aiH (from 10 bar)	-
	5-40	1,200		26-49°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,200		26-49°	-	aeE/aeE
	15-40	1,230		50°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,230		50°	-	aeE/aeE
	15-40	1,260		55°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,260		55°	-	aeE/aeE
	15-40	1,290		60°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,290		60°	-	aeE/aeE
	15-40	1,320		65°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,320		65°	-	aeE/aeE
	20-40	1,350		70°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,350		70°	-	aeE/aeE
	20-40	1,360		72,7°	aeE (up to 10 bar), aiH (from 10 bar)	-
	40.1-90	1,360		72,7°	-	aeE/aeE
	Sugar syrup with crystals	5-90		1,150	related to temperature	to 25°
5-40		1,200	26-49°	kiE (up to 10 bar), kiH (10 - 16 bar)		-
40.1-90		1,200	26-49°	-		kiE/aeE
15-40		1,230	50°	kiE (up to 10 bar), kiH (10 - 16 bar)		-
40.1-90		1,230	50°	-		kiE/aeE
15-40		1,260	55°	kiE (up to 10 bar), kiH (10 - 16 bar)		-
40.1-90		1,260	55°	-		kiE/aeE
15-40		1,290	60°	kiE (up to 10 bar), kiH (10 - 16 bar)		-
40.1-90		1,290	60°	-		kiE/aeE
15-40		1,320	65°	kiE (up to 10 bar), kiH (10 - 16 bar)		-
40.1-90		1,320	65°	-		kiE/aeE
20-40		1,350	70°	kiE (up to 10 bar), kiH (10 - 16 bar)		-
40.1-90		1,350	70°	-		kiE/aeE

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.


Application chemicals

Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [%]	Mechanical seal* material product side / atmospheric side	
					Single	Tandem
Caustic soda (NaOH)	< 60	= Concentration	< 15	< 15	kiE	-
	< 60	= Concentration	> 15 - < 50	> 15 - < 50	-	kiE/aeE
	> 60 - < 100	= Concentration	< 12	< 12	kiE	-
	> 60 - < 100	= Concentration	< 12 - < 50	< 12 - < 50	-	kiE/aeE
Peracetic / peroxyacetic (C ₂ H ₄ O ₃)	< 60	< 1,020	< 1	< 5	kiV	-
	< 60	< 1,060	< 5	> 5.1 - < 15	kiK	-
Phosphoric acid (H ₃ PO ₄)	< 40	1% = 1,004 5% = 1,026	< 5	< 15	kiV	-
	> 40 - < 85	10% = 1,053 20% = 1,114	< 5	< 15	-	kiV/aeV
	< 85	35% = 1,216 45% = 1,293	< 5	> 15 - < 45	-	kiV/aeV
Nitric acid (HNO ₃)	0-20	1% = 1,004 10% = 1,055	5	0-10	kiV	-
	20.1-40	20% = 1,115	5	0-10	-	kiV/aeV
	0-40	30% = 1,180	5	10.1-20	-	kiV/aeV
	40.1-85	40% = 1,245	5	0-20	-	kiV/aeV
	0-85		5	20.1-40	-	kiV/aeV
Sulfuric acid (H ₂ SO ₄)	< 20	< 1,1	< 25	< 12	-	kiV/aeV
	< 70	< 1,08	< 20	< 12	-	kiK/aeV
High test peroxide (H ₂ O ₂) Hydrogen peroxide	< 90	< 1,050	2	2-3	aeV	-
	< 90	< 1,150	2	< 40	kiV	-
	< 90	< 1,300	2	< 60	kiV	-
	< 60	< 1,450	2	< 100	-	kiV/aeV
Brine solution Common salt solution Sodium chloride (NaCl)	< 30	< 1,050	< 5	< 5	aeE	-
	30.1-40	< 1,050	< 5	< 5	kiE	-
	< 40	< 1,080	< 5	5.1-10	kiE	-
	< 40	< 1,200	< 25	10.1-25	-	kiE/aeE
Curing brine (butchery)	< 40	1,200	< 300	< 20	kiE	-
Salting brine (cheese dairy)	< 40	1,300	< 60	20-30	-	kiE/aeE
Ammonia/ammoniac (NH ₃)	< 40	800	< 5		-	aeE/aeE
Caustic potash (KOH) Potassium hydroxide	< 60	< 1,100	< 5	< 10	kiE	-
	< 60	< 1,200	< 5	< 20	kiE	-
Glycerol Propanetriol	80	< 1,100	< 5	0-40	aeV	-
	80	< 1,160	< 20	40.1-60	aeV	-
	80	< 1,200	< 50	60.1-75	aeV	-
	80	< 1,220	< 100	75.1-85	aeV	-
Propylene-glycol (C ₃ H ₈ O ₂)	0-80	1,010	< 5	1-20	kiV	-
	-5-80	1,020	< 20	20.1-50	kiV	-
	-10-80	1,040	< 150	50.1-75	kiV	-
	-10-0	1,060	< 255	75.1-100	kiV	-
	0.1-80	1,050	< 150	75.1-100	kiV	-
Ethanediol Ethylene-glycol (C ₂ H ₆ O ₂)	0-80	1,030	< 5	1-20	kiE	-
	-5-80	1,060	< 20	20.1-50	kiE	-
	-10-80	1,090	< 40	50.1-75	kiE	-
	-10-0	1,120	< 100	75.1-100	kiE	-
	0.1-80	1,110	< 65	75.1-100	kiE	-
Citric acid (C ₆ H ₈ O ₇) Natural citric acid	5-80	1% = 1,005 10% = 1,020	< 15	< 10	kiV	-
	5-80	10.1% = 1,020 20% = 1,050 30% = 1,100 50% = 1,260	< 15	10.1-50	kiV	-
Acetic acid (C ₂ H ₄ O ₂)	5-80	1,010	1	< 10	aeE	-
	5-100	1,050	1	10.1-100	-	aeK/aeE

Application waste water

Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Mechanical seal* material product side / atmospheric side	
				Single	Tandem
Dirty water Laboratory waste water Sewage Waste water, without solids (not abrasive), pH > 7	< 80	1,000	1	kiV	–
Dirty water Laboratory waste water Sewage Waste water, without solids (not abrasive), pH < 7	< 80	1,000	1	kiE	–
Landfill seepage water, not ozoniferous, chloride content max. 350mg/l	< 50	1,000	1	kiV	–
Landfill seepage water, not ozoniferous, no chloride content	< 50	1,000	1	kiV	–
Landfill seepage water, ozoniferous, max. 300 ppB, chloride content max. 350mg/l	< 50	1,000	1	kiK	–
Landfill seepage water, ozoniferous, max. 300 ppB, no chloride content	< 50	1,000	1	kiK	–
Activated sludge	< 60	1,000	1	kiV	–

* aeE: carbon/stainless steel/EPDM, aeK: carbon/stainless steel/FFKM, aeV: carbon/stainless steel/Viton, kiE: SIC/SIC/EPDM, kiH: SIC/SiC/EPDM (USP-Class VI), kiK: SIC/SIC/FFKM, kiV: SIC/SIC/Viton, ooH: SIC/SIC/EPDM (USP-Class VI). The elastomer of the static seals equals the elastomer of the mechanical seals.

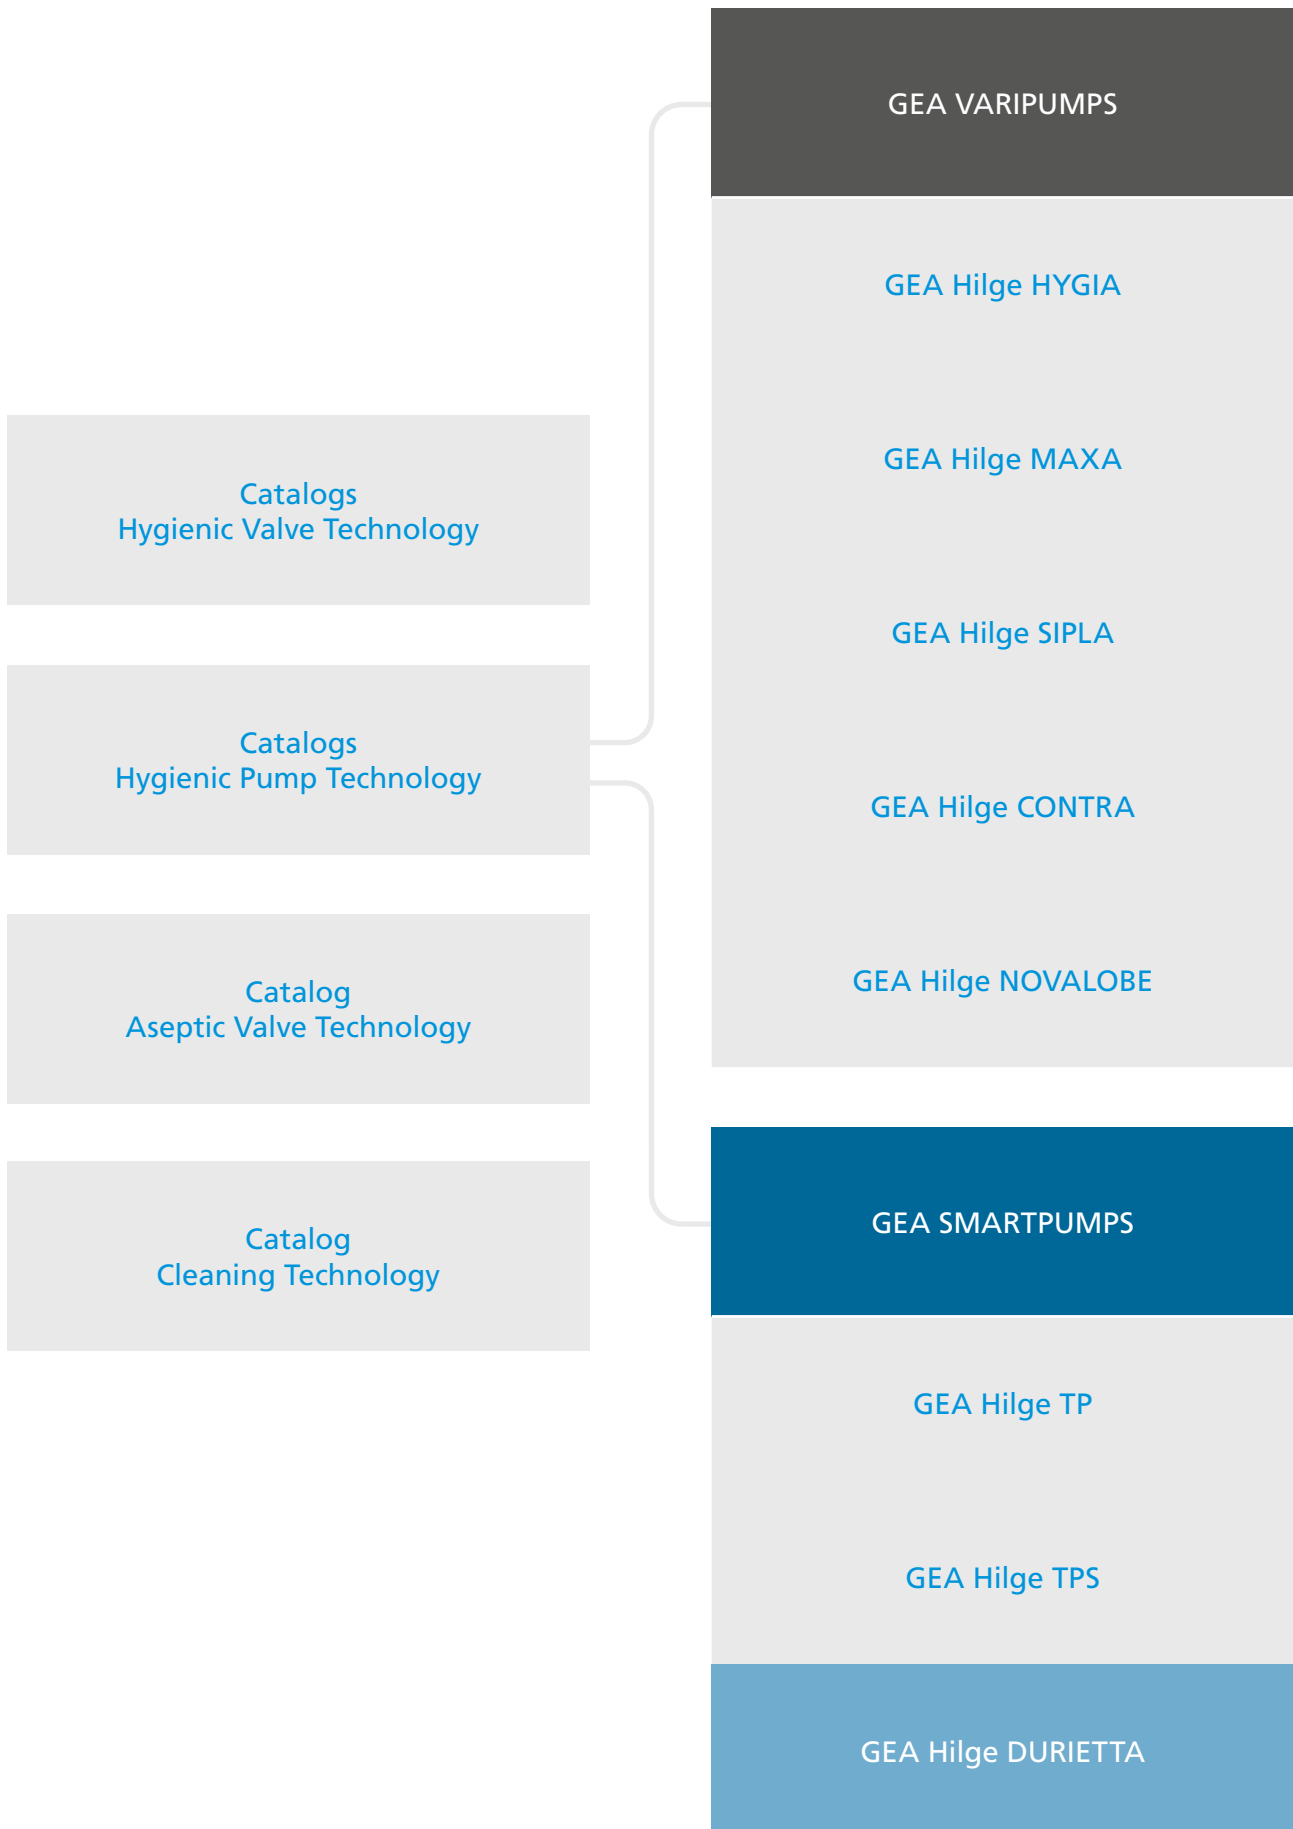

**GEA Hilge DURIETTA
compact, single-
and multi-stage
centrifugal pumps**

GEA Hilge DURIETTA 0 K 1

GEA Hilge DURIETTA 0 K-SUPER 2

Nominal width Connection type	DIN OD ISO	1-stage			2-stage			3-stage		
		25/25	32/25	40/25	25/25	32/25	40/25	25/25	32/25	40/25
		1"/1"	1¼"/1"	1½"/1"	1"/1"	1¼"/1"	1½"/1"	1"/1"	1¼"/1"	1½"/1"
		33.7/33.7	42.4/33.7	48.3/33.7	33.7/33.7	42.4/33.7	48.3/33.7	33.7/33.7	42.4/33.7	48.3/33.7
Threaded connection DIN 11851 (DIN)	a ₁	52.5	55.5	54.0	73.0	76.0	74.5	93.5	96.5	95.0
	h ₂	131.0	131.0	131.0	131.0	131.0	131.0	131.0	131.0	131.0
	l ₅ ⁽¹⁾	47.5	47.5	47.5	47.5	47.5	47.5	67.5	67.5	67.5
	l ⁽¹⁾	43.0	43.0	43.0	43.0	43.0	43.0	63.0	63.0	63.0
Threaded connection SMS international (OD)	a ₁	42.5	41.5	43.5	63.0	62.0	64.0	83.5	82.5	84.5
	h ₂	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0
	l ₅ ⁽¹⁾	47.5	47.5	47.5	47.5	47.5	47.5	67.5	67.5	67.5
	l ⁽¹⁾	43.0	43.0	43.0	43.0	43.0	43.0	63.0	63.0	63.0
Threaded connection BS4825 (RJT) (OD)	a ₁	69.0		69.0	89.5		89.5	110.0		110.0
	h ₂	123.5	(N/A)	123.5	123.5	(N/A)	123.5	123.5	(N/A)	123.5
	l ₅ ⁽¹⁾	47.5		47.5	47.5		47.5	67.5		67.5
	l ⁽¹⁾	43.0		43.0	43.0		43.0	63.0		63.0
Grooved flange DIN 11864-2/ 11853-2 Pipe range A (DIN)*	a ₁	63.5	68.5		84.0	89.0		104.5	109.5	
	h ₂	126.0	126.0	(N/A)	126.0	126.0	(N/A)	126.0	126.0	(N/A)
	l ₅ ⁽¹⁾	47.5	47.5		47.5	47.5		67.5	67.5	
	l ⁽¹⁾	43.0	43.0		43.0	43.0		63.0	63.0	
Flange EN 1092-1 PN10 Kremo (ISO)	a ₁	56.5	78.5		77.0	99.0		97.5	119.5	
	h ₂	115.0	115.0	(N/A)	115.0	115.0	(N/A)	115.0	115.0	(N/A)
	l ₅ ⁽¹⁾	47.5	47.5		47.5	47.5		67.5	67.5	
	l ⁽¹⁾	43.0	43.0		43.0	43.0		63.0	63.0	
Flange connection APV-FG/ 3.1-PN10 (DIN)	a ₁	67.5		67.5	88.0		88.0	108.5		108.5
	h ₂	126.0	(N/A)	126.0	126.0	(N/A)	126.0	126.0	(N/A)	126.0
	l ₅ ⁽¹⁾	47.5		47.5	47.5		47.5	67.5		67.5
	l ⁽¹⁾	43.0		43.0	43.0		43.0	63.0		63.0
Clamp DIN 32676 Pipe range C (OD)**	a ₁	59.5		59.5	80.0		80.0	100.5		100.5
	h ₂	138.0	(N/A)	138.0	138.0	(N/A)	138.0	138.0	(N/A)	138.0
	l ₅ ⁽¹⁾	47.5		47.5	47.5		47.5	67.5		67.5
	l ⁽¹⁾	43.0		43.0	43.0		43.0	63.0		63.0

⁽¹⁾ Add 40.5 mm for pumps with double mechanical seal

* For pipes to DIN 11866 Range A

** For pipes to DIN 11866 Range C

Nominal width	DIN	4-stage			5-stage			6-stage		
		25/25	32/25	40/25	25/25	32/25	40/25	25/25	32/25	40/25
Connection type	OD	1"/1"	1¼"/1"	1½"/1"	1"/1"	1¼"/1"	1½"/1"	1"/1"	1¼"/1"	1½"/1"
	ISO	33.7/33.7	42.4/33.7	48.3/33.7	33.7/33.7	42.4/33.7	48.3/33.7	33.7/33.7	42.4/33.7	48.3/33.7
Threaded connection DIN 11851 (DIN)	a ₁	114.0	117.0	115.5	134.5	137.5	136.0	155.0	158.0	156.5
	h ₂	131.0	131.0	131.0	131.0	131.0	131.0	131.0	131.0	131.0
	l ₅ ⁽¹⁾	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
	l ⁽¹⁾	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0
Threaded connection SMS international (OD)	a ₁	104.0	103.0	105.0	124.5	123.5	125.5	145.0	144.0	146.0
	h ₂	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0
	l ₅ ⁽¹⁾	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5	67.5
	l ⁽¹⁾	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0
Threaded connection BS4825 (RJT) (OD)	a ₁	130.5		130.5	151.0		151.0	171.5		171.5
	h ₂	123.5	(N/A)	123.5	123.5	(N/A)	123.5	123.5	(N/A)	123.5
	l ₅ ⁽¹⁾	67.5		67.5	67.5		67.5	67.5		67.5
	l ⁽¹⁾	63.0		63.0	63.0		63.0	63.0		63.0
Grooved flange DIN 11864-2/ 11853-2 Pipe range A (DIN)*	a ₁	125.0	130.0		145.5	150.5		166.0	171.0	
	h ₂	126.0	126.0	(N/A)	126.0	126.0	(N/A)	126.0	126.0	(N/A)
	l ₅ ⁽¹⁾	67.5	67.5		67.5	67.5		67.5	67.5	
	l ⁽¹⁾	63.0	63.0		63.0	63.0		63.0	63.0	
Flange EN 1092-1 PN10 Kremo (ISO)	a ₁	118.0	140.0		138.5	160.5		159.0	181.0	
	h ₂	115.0	115.0	(N/A)	115.0	115.0	(N/A)	115.0	115.0	(N/A)
	l ₅ ⁽¹⁾	67.5	67.5		67.5	67.5		67.5	67.5	
	l ⁽¹⁾	63.0	63.0		63.0	63.0		63.0	63.0	
Flange connection APV-FG/ 3.1-PN10 (DIN)	a ₁	129.0		129.0	149.5		149.5	170.0		170.0
	h ₂	126.0	(N/A)	126.0	126.0	(N/A)	126.0	126.0	(N/A)	126.0
	l ₅ ⁽¹⁾	67.5		67.5	67.5		67.5	67.5		67.5
	l ⁽¹⁾	63.0		63.0	63.0		63.0	63.0		63.0
Clamp DIN 32676 Pipe range C (OD)**	a ₁	121.0		121.0	141.5		141.5	162.0		162.0
	h ₂	138.0	(N/A)	138.0	138.0	(N/A)	138.0	138.0	(N/A)	138.0
	l ₅ ⁽¹⁾	67.5		67.5	67.5		67.5	67.5		67.5
	l ⁽¹⁾	63.0		63.0	63.0		63.0	63.0		63.0


⁽¹⁾ Add 40.5 mm for pumps with double mechanical seal

* For pipes to DIN 11866 Range A

** For pipes to DIN 11866 Range C



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: welded 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA)
Static seals	EPDM (FDA)
Motor	Standard motor: IEC-Motor, 3 × 220/ 230/ 240 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 8 m³/h
Flow rate 60 Hz	Max. 8 m³/h
Pump head 50 Hz	Max. 72 m
Pump head 60 Hz	Max. 41 m
Housing pressure	8 bar
Certificates	

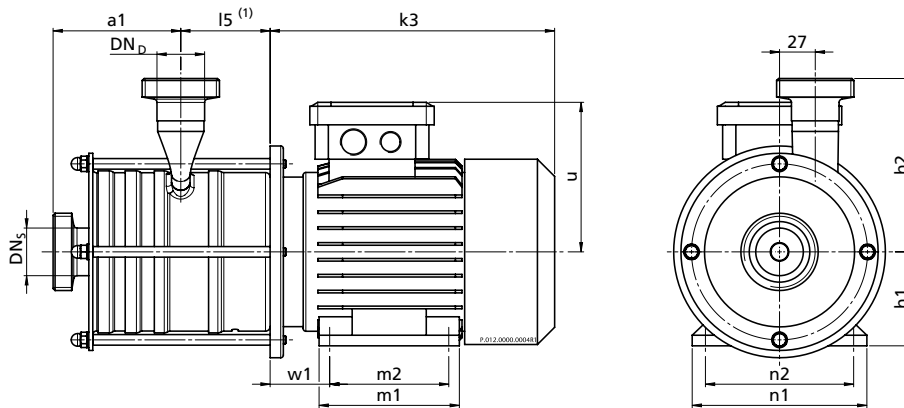

2-pole

P2 [kW]	IEC-size	h1 [mm]	k3 [mm]	u [mm]	w1 [mm]	m1 [mm]	m2 [mm]	n1 [mm]	n2 [mm]	s1 [mm]	Weight [kg]
0.55	71	71	215	115	45	106	90	132	112	9 × 12	9.5
0.75	71	71	215	115	45	106	90	132	112	9 × 12	11.4
1.5	90S	90	270	150	56	150	100	170	140	10 × 15	19.6
2.2	90L	90	270	150	56	150	125	170	140	10 × 15	23.1


4-pole

P2 [kW]	IEC-size	h1 [mm]	k3 [mm]	u [mm]	w1 [mm]	m1 [mm]	m2 [mm]	n1 [mm]	n2 [mm]	s1 [mm]	Weight [kg]
0.25	71	71	215	115	45	106	90	132	112	9 × 12	7.6


Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See connection dimensions.

⁽¹⁾ Other connections and sizes deliverable on request

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–65, pressure side DN 25–50
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 8 m³/h
Flow rate 60 Hz	Max. 8 m³/h
Pump head 50 Hz	Max. 72 m
Pump head 60 Hz	Max. 41 m
Housing pressure	8 bar
Certificates	

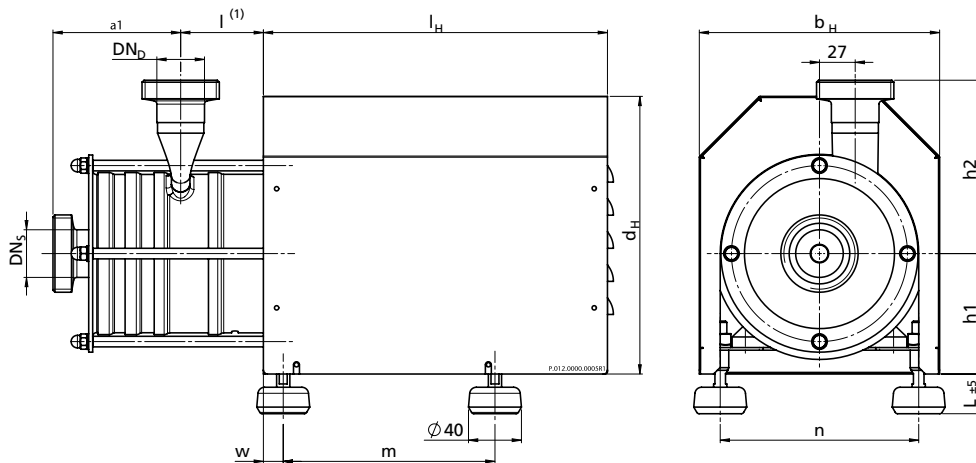

2-pole

P2 [kW]	IEC-size	h1 [mm]	L [mm]	w [mm]	m [mm]	n [mm]	I_H [mm]	b_H [mm]	d_H [mm]	Weight [kg]
0.55	71	91	30	15	160	150	260	182	210	12.6
0.75	71	91	30	15	160	150	260	182	210	14.4
1.5	90S	110	30	15	230	180	330	222	286	24.3
2.2	90L	110	30	15	230	180	330	222	286	27.8

4-pole


P2 [kW]	IEC-size	h1 [mm]	L [mm]	w [mm]	m [mm]	n [mm]	I_H [mm]	b_H [mm]	d_H [mm]	Weight [kg]
0.25	71	91	30	15	160	150	260	182	210	10.7

Dimensions depend on the casing size (DN_s , DN_D , a_1 , h_2 , e_1). See connection dimensions.


⁽¹⁾ Other connections and sizes deliverable on request

Weight: net-weight without packaging



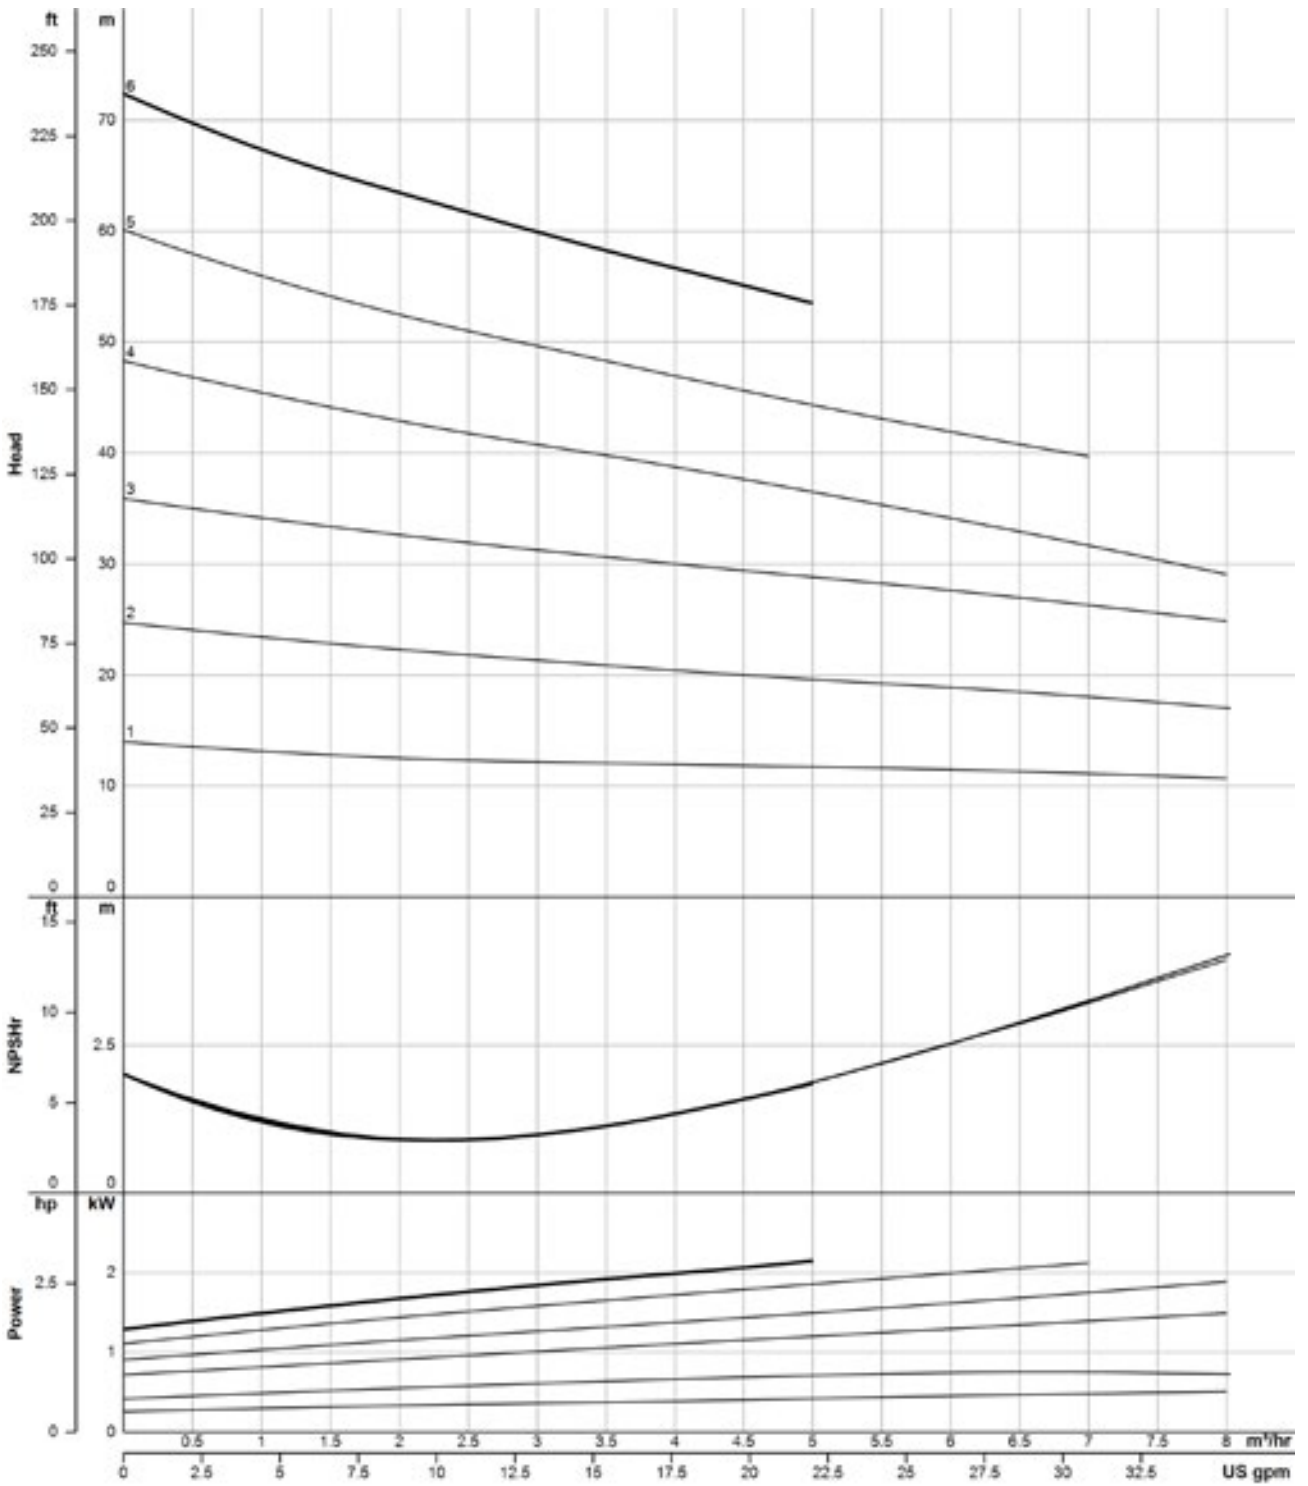

The flow charts are based on water, temperature 20 °C

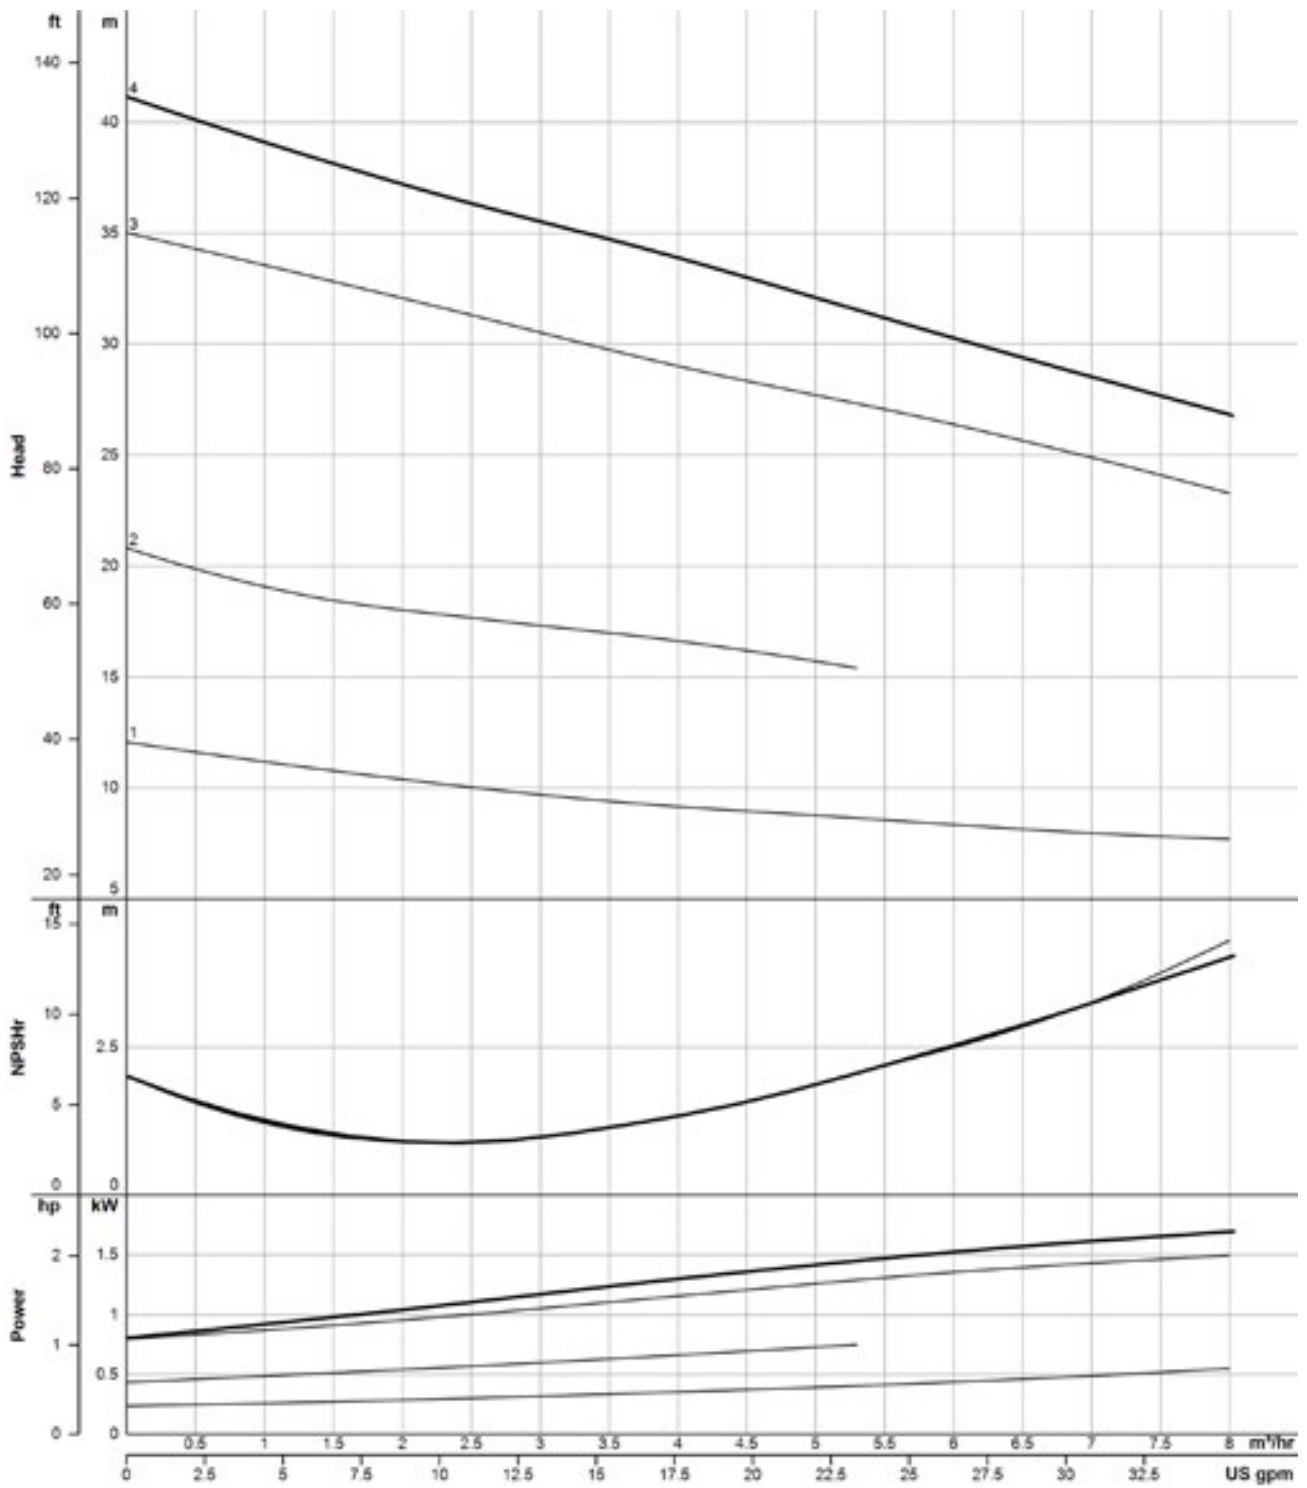

The flow charts are based on water, temperature 20 °C



INQUIRY SHEET · CENTRIFUGAL PUMPS 1/2



GEA Hygienic Pumps

Contact Data

Company: _____

Contact Person: _____ E-mail: _____

Phone: _____ Country: _____

Preferred Range

VARIPUMP SMARTPUMP No requirement

Liquid Data

*Liquid: _____ Solids: No Yes:

*Liquid temperature [°C/°F]: _____ Kind of solids: _____

*Density [kg/dm³]: _____ Size of solids [mm]: _____

*Viscosity [mPas]: _____ Abrasive: No Yes

Concentration [%]: _____

Operating Conditions

*Duty point 1 *Flow [m³/h/gpm]: _____ *Head [m lc]: _____

Duty point 2 Flow [m³/h/gpm]: _____ Head [m lc]: _____

End-suction pump: Self-priming pump:

Inlet pressure (NPSHa) [m]: _____ Suction head [m]: _____

Vacuum at inlet: No Yes: Gas content: No < 5 % > 5 %

Vacuum, abs. [mbar]: _____

System pressure [bar]: _____

Cleaning / Sterilization

CIP: No Yes: SIP: No Yes:

CIP Temperature [°C/°F]: _____ SIP Temperature [°C/°F]: _____

CIP Flow [m³/h/gpm]: _____ SIP Duration [min]: _____

CIP Head [m Fls]: _____

Pump execution

***Connection Type** **Connection Size** DN_i/DN_o: _____

Tri Clamp (DIN 32676) ANSI Flange DIN 11851 Other: _____

DIN 11853-2/11864-2 Other: _____ **Drainable:** No Yes

Execution and Design

<input type="checkbox"/> Pump in Bloc version with motor	<input type="checkbox"/> Combi foot	<input type="checkbox"/> Motor foot
<input type="checkbox"/> Pump in long coupled version with base plate and standard motor	<input type="checkbox"/> On Trolley	<input type="checkbox"/> Horizontal
<input type="checkbox"/> With stainless steel motor shroud	<input type="checkbox"/> Cast iron foot	<input type="checkbox"/> Vertical
<input type="checkbox"/> 3-A stainless steel adjustable feet	<input type="checkbox"/> Stainless steel foot	<input type="checkbox"/> Vertical with stainless steel stand

INQUIRY SHEET · CENTRIFUGAL PUMPS 2/2



GEA Hygienic Pumps

Surface Roughness

- Not specified
- $R_a \leq 3.2 \mu\text{m}$
- $R_a \leq 0.8 \mu\text{m}$
- $R_a \leq 0.4 \mu\text{m}$

Ferrite Content

- Not specified
- Fe < 1%

Shaft Seal

- Single mechanical seal
- Flushed mechanical seal

Material Shaft Seal

- Carbon/Stainless Steel
- SiC/SiC
- Carbon/SiC
- other: _____

Elastomer

- EPDM
- FKM (Viton)
- other: _____

Motor Data

Power supply:

- 3~ 400V/50 Hz
- 3~ 200V/50 Hz
- other: _____
- 3~ 460V/60 Hz
- 3~ 200V/60 Hz
- 3~ 380V/60 Hz

Motor speed [1/min]: _____

PTC-Thermistors: No Yes

2 wire-Thermistors: No Yes

Variable speed drive No Yes:

- External frequency converter (not on motor)
- Integrated frequency converter (on motor)

Explosion protection No Yes

ATEX No Yes:

Ex-Zone: _____

Temperature class: _____

Ambient temperature [°C/°F]: _____

EXP Motor

No Yes:

Temperature class: _____

Ambient Temperature [°C/°F]: _____

Class: _____

Division: _____
















Group: _____

Certificates/Documentation

- 3-A Sanitary Standard certification
- Inspection certificate 3.1 acc. to DIN EN 10204
- Test report 2.2 acc. to DIN EN 10204
- EHEDG certification
- Further certificates and documentation: _____
- FDA declaration of conformity
- Surface roughness test report
- Delta ferrite test report

Further Information

* Fields marked with an asterisk are mandatory for a pump selection

2.1		Works certificate according to DIN EN 10204: Declaration of the compliance with the order. This certificate is issued by the manufacturer.
2.2		Test report according to DIN EN 10204: Declaration of the compliance with the order under specification of the results of non-specific tests. This certificate is issued by the manufacturer.
3.1		Inspection certificate 3.1 according to DIN EN 10204: Declaration of the compliance with the order under specification of the results of specific tests. This certificate is issued by an authority which is independent of manufacturing and is validated by the manufacturers authorized inspection representative.
3-A		3-A Sanitary Standards, Inc. (3-A SSI) is an independent, non-profit corporation dedicated to advancing hygienic equipment design for the food, beverage, and pharmaceutical industries.
AS-i		Actuator Sensor interface. BUS system for the lowest field level.
ASME-BPE		Standard of the ASME's – bioprocessing equipment association
ATEX		Atmosphères Explosibles. ATEX comprises the directives of the European Union in the area of explosion protection. For one thing, this is the ATEX equipment directive 94/9/EC, for another, the ATEX workplace directive 1999/92/EC.
cCSAus		Test of a product by CSA according to applicable safety standards in Canada and the USA.
CE		Conformité Européenne. By affixing the CE mark, the manufacturer confirms that the product complies with the European directives applicable to the specific product.
CSA		Canadian Standards Association. A non-governmental Canadian organization which issues standards as well as checking and certifying the safety of products. It is now globally active.
cULus		Test of a product by UL according to applicable safety standards in Canada and the USA.
DIN EN ISO 9001:2015		This norm is the basis for a multitude of varied organizations in different industries worldwide for quality assurance and quality management. It is the most widespread standards of ISO (International Organisation for Standardization).
EAC		Euroasion conformity. The symbol is used similar to the European CE mark. The manufacturer or supplier confirms that the machine has passed all necessary compliance procedures in one of the Member States of the customs union.
EG 1935/2004		Materials in contact with the product used in pumps from GEA Hilge are in accordance with EC regulation 1935/2004. This defines a general framework for materials and objects intended to come into contact with foodstuffs.
EHEDG		European Hygienic Engineering & Design Group. European supervisory authority for foodstuffs and pharmaceuticals. This authority issues approvals and certificates for products and materials that are used in the foodstuffs and pharmaceuticals industries.
FDA		Food and Drug Administration. US supervisory authority for foodstuffs and pharmaceuticals. This authority issues approvals and certificates for products and materials that are used in the foodstuffs and pharmaceuticals industries.
UL		Underwriters Laboratories. An organization founded in the USA for checking and certifying products and their safety.
USP Class VI		The United States Pharmacopeial Convention (USP) is a scientific nonprofit organization that sets standards to help protecting public health. Class VI administer tests and impacts of material and their substances on animal and human tissues.

Abbreviation	Explanation
°C	Degrees Celsius, unit of measurement for temperature
°F	Degrees Fahrenheit, unit of measurement for temperature
3D	Three-dimensional
A	Ampere, unit of measurement of current intensity or Output, term used in automation
AC	Alternating Current
ADI free	All elastomer compounds are free of animal-derived ingredients
AISI	American Iron and Steel Institute, association of the American steel industry
ANSI	American National Standards Institute, American body for standardizing industrial processes
approx.	approximately
AS-i	Actuator Sensor interface, standard for fieldbus communication
ASME	American Society of Mechanical Engineers, professional association of mechanical engineers in the USA
ASME-BPE	Standard of the ASME's – bioprocessing equipment association
ATEX	Atmosphères Explosibles, synonymous with the directives of the European Union for potentially explosive areas
bar	Unit of measurement for pressure. All pressure values [bar/psi] refer to positive pressure [bar _g /psi _g], unless specifically stated otherwise.
bar _g	Unit of measurement for pressure relative to atmospheric pressure
CAN	Controller Area Network; asynchronous serial bus system
CE	Conformité Européenne, administrative symbol for the free movement of industrial products
CIP	Cleaning In Place, designates a process for cleaning technical process systems.
CRN	Canadian Registration Number, is issued by a Canadian Jurisdiction and covers pressure vessels, fittings, or pressure piping. It is a necessary authorization allowing these components to be in operation in Canada.
CSA	Canadian Standards Association, a non-governmental Canadian Standardization organization
Cv	The Cv value corresponds to the water flow rate through a valve (in US gal / min) at a pressure differential of 1 PSI and a water temperature of 5 °C to 30 °C. kv = 14,28 Cv (USA).
Cvs	The Cv values of a valve at nominal stroke (100 % opening) is designated the Cvs value.
dB	Decibel, one tenth of a bel, named after Alexander Graham Bell and used for identifying levels and dimensions
DC	Direct Current
DIN	Deutsches Institut für Normung e. V. Standardization organization in the Federal Republic of Germany, DIN = synonym for standards issued by the organization

Abbreviation	Explanation
DIP	Dual Inline Package, design of a switch
DN	Diameter Nominal, DIN nominal width
Device Net	Network system used in the automation industry to interconnect control devices for data exchange
E	Input, term used in automation
EAC	Certification of technical conformity from the customs union of Russia/Belarus/Kazakhstan
Pressure Equipment Directive 97/23/EC	Directive of the European Parliament and the Council Directive for layout and conformity evaluation for pressure equipment and assemblies with a maximum pressure (PS) of more than 0.5 bars.
EG No. 1935/2004	Regulation of the European Parliament which lays down common rules for materials which come, or may come, into contact with food, either directly or indirectly.
EHEDG	European Hygienic Engineering and Design Group. Consortium of equipment manufacturers, food industries, research institutes as well as public health authorities
EN	European standard, rules of the European Committee for Standardization
EPDM	Ethylene propylene diene rubber, acronym acc. to DIN/ISO 1629
Ex	Synonym for ATEX
FDA	Food and Drug Administration, official foodstuffs monitoring in the United States
FEM calculation	Finite Element Method; calculation process for simulating solids
FKM	Fluorinated rubber, acronym acc. to DIN/ISO 1629
GOST	Gosudarstvennyy Standart, Certification of conformity for components according to standards and regulations of the Russian Federation
H	Henry, unit of measurement for inductance
HNBR	Hydrated acrylonitrile butadiene rubber, acronym acc. to DIN/ISO 1629
Hz	Hertz, unit of frequency named after Heinrich Hertz
I	Formula symbol for electrical current
IEC	International Electrotechnical Commission, international standardization organization for electrical and electronic engineering
IP	Ingress Protection/International Protection, index of protection class acc. to IEC 60529
IPS	Iron Pipe Size, American pipe dimension
ISA	International Society of Automation, international US organization of the automation industry
ISO	International Organization for Standardization, international organization that produced international standards, ISO = synonym for standards from the organization
kg	Kilogram, unit of measurement for weight
Kv	The Kv value corresponds to the water flow rate through a valve (in m ³ /h) at a pressure differential of 0.98 bar and a water temperature of 5 °C to 30 °C.

Abbreviation	Explanation
Kvs	The Kv values of a valve at nominal stroke (100 % opening) is designated the Kvs value
L	Conductive
LED	Light-Emitting Diode
mm	Millimeter, unit of measurement for length
M	Metric, system of units based on the meter or Mega, one million times a unit
m ³ /h	Cubic meters per hour, unit of measurement for volumetric flow
max.	Maximum
NAMUR	Standardization working association for measuring and control technology in the chemical industry, synonym for the interface type of the organization, especially for potentially explosive atmospheres
NC	Normally Closed; valve or solenoid valve control which is closed in idle status
NO	Normally Open; valve or solenoid valve control which is open in idle status
NOT-element	Logic element, NOT gate
NPN	Signal transmission against reference potential, current-consuming
NPT	National Pipe Thread, US thread standard for self-sealing pipe fittings
OD	Outside Diameter, pipe dimension
ODVA	Open DeviceNet Vendor Association, global association for network standards
PA 12/L	Polyamide
Pg	Armored thread
PN	Nominal pressure for pipeline systems according to EN 1333, rated pressure in bar at room temperature (20 °C)
PNP	Signal transmission against reference potential, current-supplying
PPO	Polyphenylene oxide, thermoplastic material
PS	Maximum permitted operating pressure at which the components can operate safely at maximum allowable temperature (TS)
psi	Unit of measurement for pressure, pound-force per square inch, 1 psi = 6894.75 Pa. All pressure values [bar/psi] refer to positive pressure [bar _g /psi _g], unless specifically stated otherwise.
psi _g	Unit of measurement for pressure relative to atmospheric pressure
PV	Solenoid valve
R _a in μm	Average roughness value, describes the roughness of a technical surface
International Protection-Code IP67, IP66, IP69K	Classifies and rates the degree of protection provided against intrusion dust, accidental contact, and water

Abbreviation	Explanation
SES	GEA Tuchenhagen control head for Ex areas, control top system of GEA Tuchenhagen
SET-UP	Self-learning installation, the SET-UP procedure carries out all necessary settings for generating messages during commissioning and maintenance.
SIP	Sterilization in Place, refers to a process for cleaning technical process systems
SMS	Svensk Mjök Standard, Scandinavian pipe dimension
SW	Indicates the size of a tool spanner, "Schlüsselweite"
TA-Luft VDI 2440	If a product is certified according to TA Luft it meets the requirements for proof of high grade performance according to TA Luft of 1.0×10^{-4} mbar x l / (s x m) at service conditions under the VDI guideline 2440. The product will hence be tested for tightness.
TS	Maximum permitted operating temperature
UL	Underwriters Laboratories, a certification organization established in the USA
USP Class VI	The United States Pharmacopeial Convention (USP) is a scientific nonprofit organization that sets standards to help protecting public health. Class VI administer tests and impacts of material and their substances on animal and human tissues.
UV	Ultraviolet, ultraviolet radiation is a wavelength of light
V	Volt, unit of measurement for voltage
VMQ	High-polymer vinyl methyl polysiloxane, silicone rubber, MVQ = synonym
W	Watt, unit of measurement for power
Y	Control air connection for the working cylinder, designation from pneumatic systems
μ	Micro, one millionth of a unit
Ω	Ohm, the unit of electrical resistance named after Georg Simon Ohm

We live our values.

Excellence • Passion • Integrity • Responsibility • GEA-versity

“Engineering for a better world” is the driving and energizing principle connecting GEA’s workforce. As one of the largest systems suppliers, GEA makes an important contribution to a sustainable future with its solutions and services, particularly in the food, beverage and pharmaceutical sectors. Across the globe, GEA’s plants, processes and components contribute significantly to the reduction of CO₂ emissions, plastic use as well as food waste in production.

GEA is listed on the German MDAX and the STOXX® Europe 600 Index and also included in the DAX 50 ESG and MSCI Global Sustainability indexes.