



GEA Hilge TP

Single-stage End-suction Centrifugal Pumps
Catalog 2018

Legal notice

Publication date: April 2018

The publication of specifications, technical data and information in written or electronic form does not release the user from the responsibility of checking for themselves all products delivered by us for suitability for the application(s) intended. These may be subject to change without prior notification. Errors and printing errors excepted – we assume no liability for the correctness of specifications given.

The general terms and conditions of delivery apply.

All rights reserved – copyright on all contents.

GEA reserves the right to make technical changes to the information in this catalog.

GEA Hilge

Niederlassung der GEA Tuchenhagen GmbH

Hilgestraße 37–47, 55294 Bodenheim, Germany


Registered Office: Büchen, Court of Registration: HRB 836 SB in Lübeck

Management Board: Tobias Dieckmann, Michael Wulle, Oliver Hegehofer

VAT-ID: DE 812589019, Tax No.: 105/5857/1004

Introduction to GEA Flow Components.....	6
Hygienic Pumps	
Introduction to Hygienic Pumps	8
Certificates	26
GEA Hilge TP Pumps	
Overview	29
Product Range.....	35
Connection Guide.....	36
Seals.....	39
Installation.....	40
Media Guide.....	42
Pump Selection Matrix	52
2-pole, 50 HZ	
Pump Selection Matrix	54
GEA Hilge TP 1020.....	56
GEA Hilge TP 1540.....	58
GEA Hilge TP 2030.....	60
GEA Hilge TP 2050.....	62
GEA Hilge TP 2575.....	64
GEA Hilge TP 3050.....	66
GEA Hilge TP 5060.....	68
GEA Hilge TP 7060.....	70
GEA Hilge TP 8050.....	72
GEA Hilge TP 8080.....	74
GEA Hilge TP 16040.....	76
4-pole, 50 HZ	
Pump Selection Matrix	78
GEA Hilge TP 1020.....	80
GEA Hilge TP 1540.....	82
GEA Hilge TP 2030.....	84
GEA Hilge TP 2050.....	86
GEA Hilge TP 2575.....	88
GEA Hilge TP 3050.....	90
GEA Hilge TP 5060.....	92
GEA Hilge TP 7060.....	94
GEA Hilge TP 8050.....	96
GEA Hilge TP 8080.....	98
GEA Hilge TP 16040.....	100
2-pole, 60 HZ	
Pump Selection Matrix	102
GEA Hilge TP 1020.....	104
GEA Hilge TP 1540.....	106
GEA Hilge TP 2030.....	108
GEA Hilge TP 2050.....	110
GEA Hilge TP 2575.....	112
GEA Hilge TP 3050.....	114
GEA Hilge TP 5060.....	116
GEA Hilge TP 7060.....	118
GEA Hilge TP 8050.....	120

GEA Hilge TP 8080.....	122
GEA Hilge TP 16040.....	124
4-pole, 60 HZ	
Pump Selection Matrix.....	126
GEA Hilge TP 1020.....	128
GEA Hilge TP 1540.....	130
GEA Hilge TP 2030.....	132
GEA Hilge TP 2050.....	134
GEA Hilge TP 2575.....	136
GEA Hilge TP 3050.....	138
GEA Hilge TP 5060.....	140
GEA Hilge TP 7060.....	142
GEA Hilge TP 8050.....	144
GEA Hilge TP 8080.....	146
GEA Hilge TP 16040.....	148
Appendix	
Composition of Order Code.....	150
Inquiry Sheet.....	154
Description of Certificates and Test Reports.....	156
Abbreviations and Terms.....	157

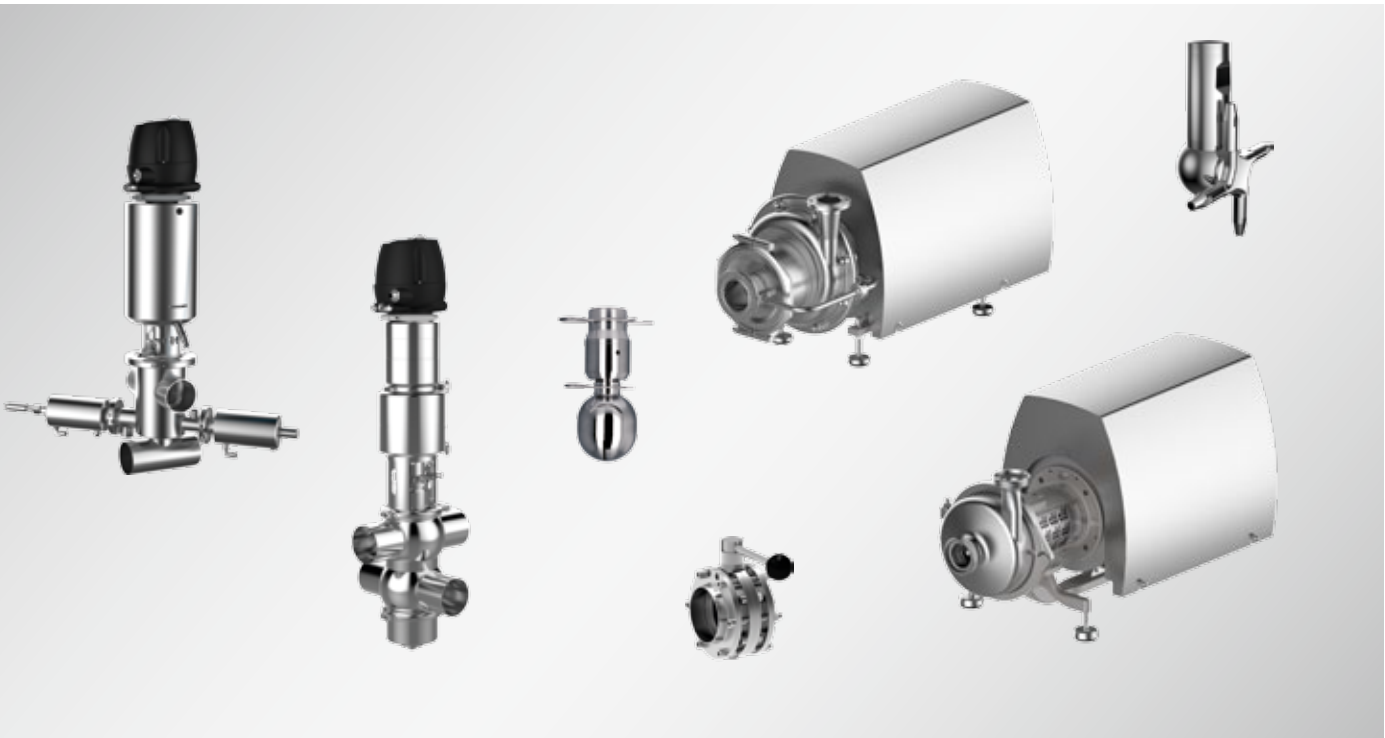

Regardless of the application – for our customers product quality and profitability are what matters. This is what GEA Flow Components is known for. Our engineers are specialists in everything that flows.

GEA Group Aktiengesellschaft

GEA is one of the largest suppliers of process technology for the food industry and for a wide range of other industries. As an international technology group, the company focuses on world-leading process solutions and components for sophisticated production processes.

GEA Flow Components

GEA offers well-engineered process components and services to ensure smooth production processes in the treatment of liquid products. We develop and produce a comprehensive product range that includes valve technology for all hygienic classes (Hygienic, UltraClean, Aseptic), hygienic pumps and cleaning technology.

GEA Flow Components products and services are available around the world through the international GEA network.



Around one quarter of the milk processed is handled by GEA equipment



Roughly every second liter of beer is brewed using GEA equipment and solutions



Every fourth liter of human blood is handled by GEA equipment

State-of-the-art hygienic design

GEA Flow Components meet the highest hygienic standards where required, such as EHEDG and 3-A standards.

Hygienic valves and components from GEA form the core component of matrix-piped process plants.

When it comes to sterile applications, GEA offers both UltraClean and Aseptic valves and systems. The hermetic sealing of the product area provides a maximum level of process line isolation and thus contributes to process and product safety.

The hygienic pump range from GEA includes centrifugal pumps (single-stage, multi-stage and self-priming), as well as rotary lobe pumps.

GEA cleaning devices – whether index, orbital, rotary or static – achieve optimum cleaning results in multiple industries. GEA product recovery systems help to recover valuable products and reduce both waste disposal costs as well as water and detergent consumption.



Applications

- Beverages
 - Beer, juice, smoothies, and more
- Dairy processing
 - Milk, yoghurt, cheese, and more
- Food
 - Sauces, pastes, ketchup, mayonnaise, and more
- Pharma/Biotech
 - Pharmaceuticals, biotech, cosmetics, health care, and more
- Chemicals
 - Fine chemicals, bulk chemicals, cleaning agents, and more

Hygienic Valve Technology

A complete range of economically designed Hygienic valves for complex tasks as well as basic functions, helping producers to achieve high product quality and efficiency.

Aseptic Valve Technology

UltraClean and Aseptic valves are suitable for production processes which require a higher safety protection against contamination from the environment and thus warrant microbial stability of the product over the whole process.

Hygienic Pump Technology

A great variety of Hygienic pumps with sensibly rated high efficiency motors and carefully designed flow paths, driving economic efficiency and sustainable operation.

Cleaning Technology

Index, orbital, rotating and static cleaners in a complete range, developed with special emphasis on saving valuable resources in the cleaning process.



Gentle product handling, continued reliability and economic efficiency are key characteristics of the state-of-the-art hygienic pumps in the GEA Flow Components range.

Maximum reliability and cost control

Because GEA customers rely on the safe, continuous operation of their production systems, GEA pumps are optimized for uncompromising reliability in all applications. The great number of pumps currently in operation is proof of their robust design, long service life and ease of maintenance.


Applying GEA pumps to production processes can significantly reduce operational costs. Sensibly rated high-efficiency motors in all the required dimensions keep energy consumption as low as possible. The product is conveyed evenly and gently for higher product quality and improved processing and distribution options.

Economical

Higher product quality

Reduced consumption of energy, water and cleaning media

Reduced time and personnel costs for maintenance and cleaning

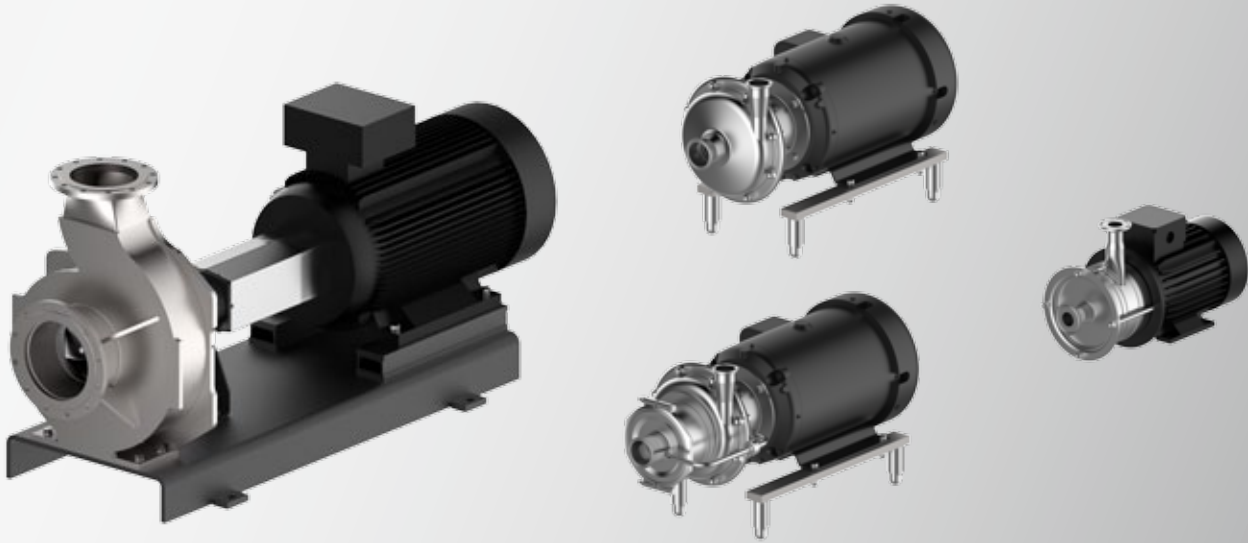

Hygienic and sustainable design

GEA pumps comply with all relevant hygiene standards and norms, with continuous documentation and up-to-date certifications safely ensuring judicial security.

Carefully designed flow paths free of dead zones ensure optimum cleaning and utilization of the conveying energy. Lower consumption of energy, water and chemicals helps to protect climate and environment, observe international regulations and promote the producer’s standing with customers and authorities.

Long-term partnership

The GEA Hilge Hygienic Pumps Competence Center situated in Bodenheim, Germany, is the primary point of contact for GEA customers and partners to plan individual solutions. The worldwide GEA sales and service network provides further assistance with support offers covering the entire lifecycle of the pump.

Sustainable


- Lower climate and environmental impact
- Sustainable, environmentally friendly production processes
- High standards for hygienic processing and care of products

Service-oriented

- Individual engineering support
- Shortest possible downtime of production
- Individual service concept

Two modern pump lines for maximum efficiency

Two product lines, GEA VARIPUMP and GEA SMARTPUMP, form a highly versatile pump range with a multitude of adaption options to ensure simpler operation, higher-quality production, and reduced consumption of valuable resources.

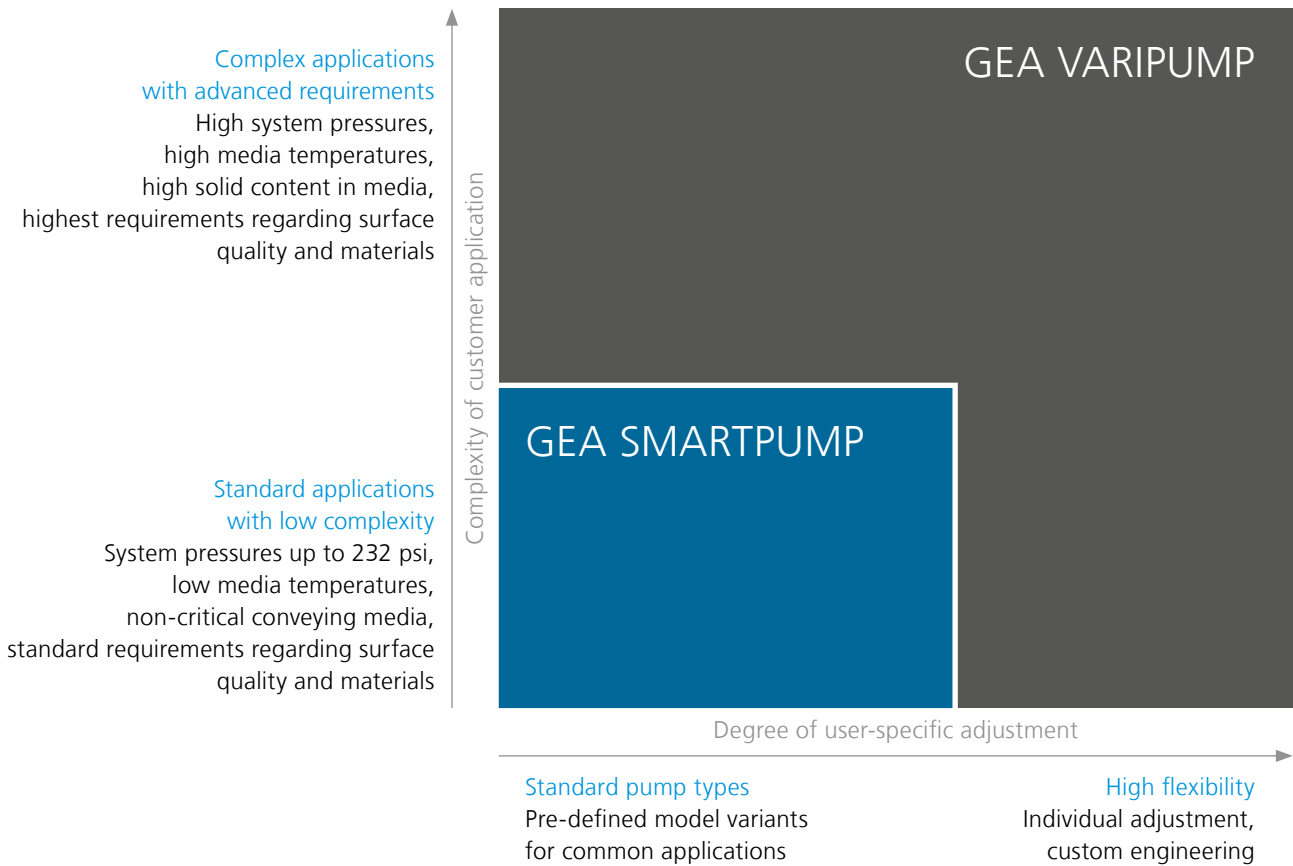

GEA VARIPUMP

The pump series in the GEA VARIPUMP line have been conceived for extreme application demands. The pumps are individually optimized by GEA for each task.

GEA VARIPUMP models are made entirely without die-cast components, offering high-quality surfaces and materials that meet stringent demands even in the sensitive pharmaceutical industry, further ensured by complementing services, e.g. Witnessed Factory Acceptance Test (FAT).

With a great variety of set-up and customizing options the pumps can be adapted individually to any production process, for lower operational costs and maximum system efficiency.

- Developed for advanced application conditions
- Project-specific customization
- Surface roughness up to $R_a \leq 16 \mu\text{in}$ ($0.4 \mu\text{m}$)
- Product-wetted materials according to specific requirements (e.g. no cast parts, $F_c \leq 1\%$ optional)


GEA SMARTPUMP

The GEA SMARTPUMP line comprises highly standardized and attractively priced pump series for common, often-used applications at standard conditions. The pumps are easy to select and ready for fast delivery. Within pre-defined parameters, the standard models can be configured to individual tasks.


The modular construction using high-value materials, the proven “Hygienic Design” and easy-to-apply standardized spare parts all recommend GEA SMARTPUMP pumps for use in cost-critical production systems – at no compromise in terms of quality.

- Application for common and clearly defined “standard” process tasks
- Simple selection and configuration
- Fast delivery
- Standardized spare parts

Single-stage, VARIPUMP
2-pole, 50 Hz

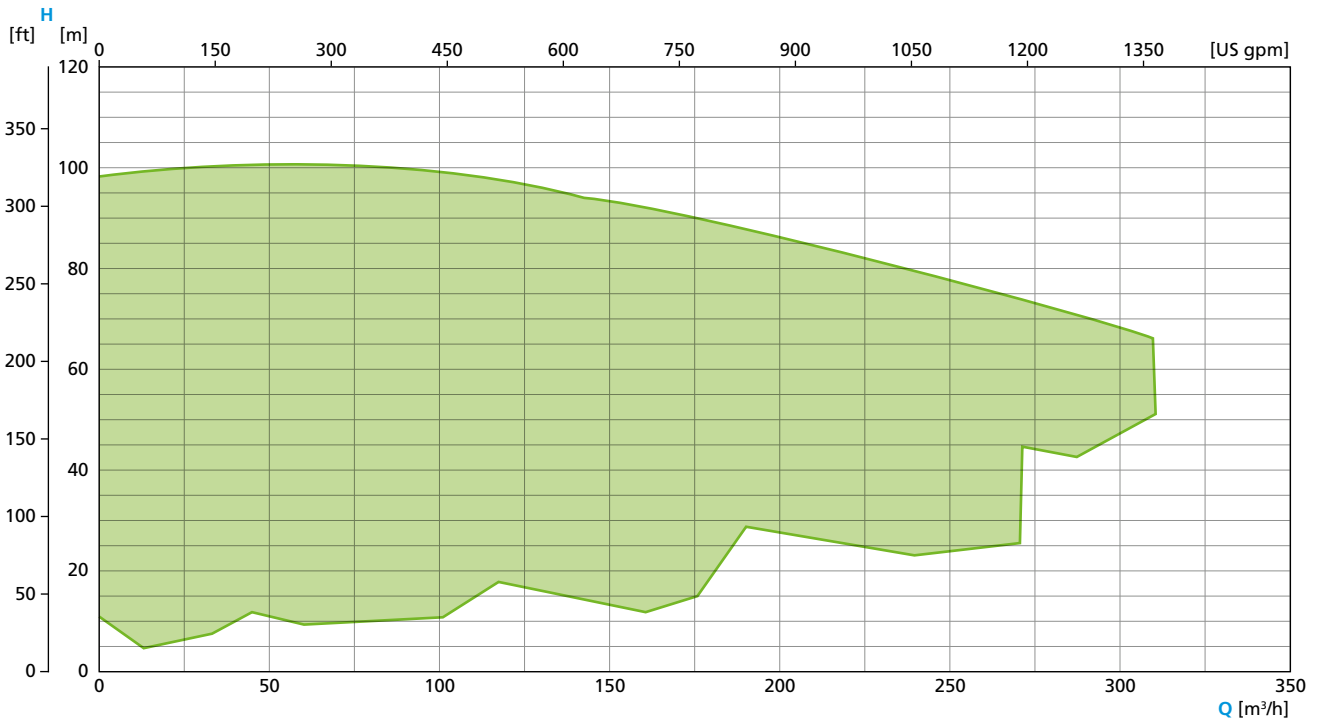


Single-stage, VARIPUMP*
4-pole, 50 Hz

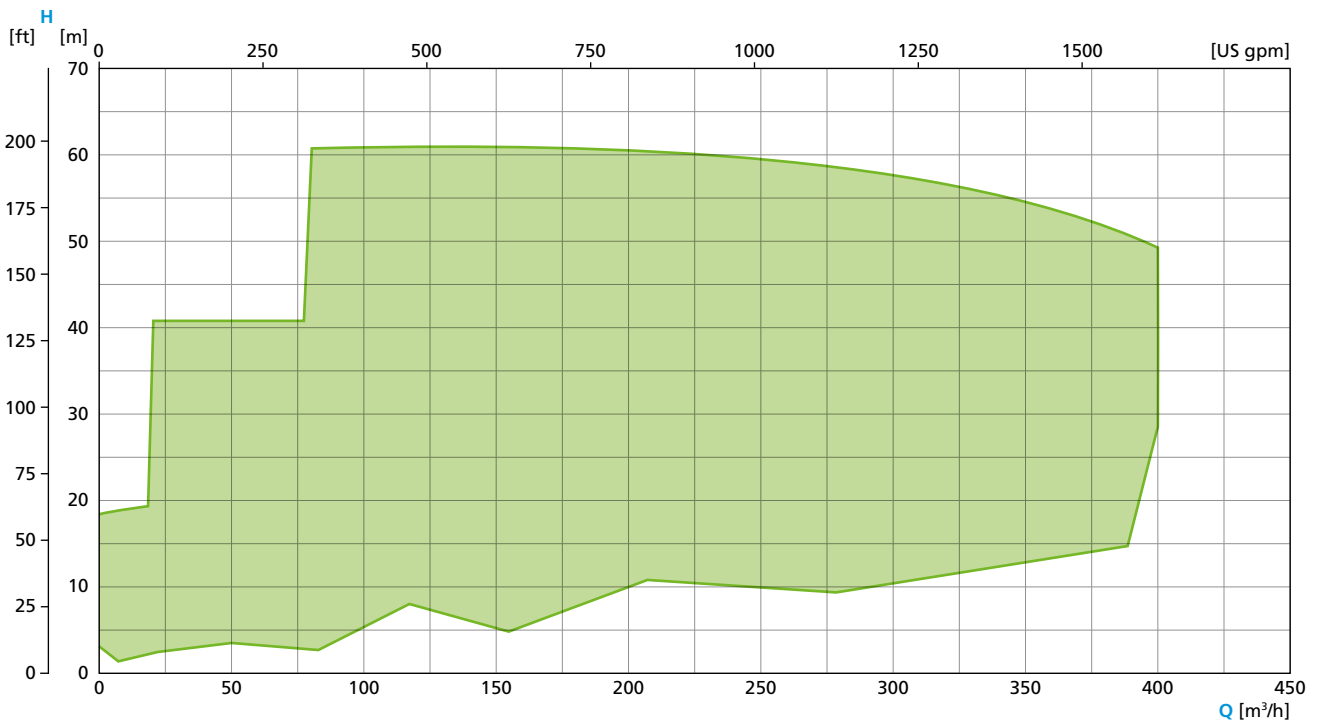


* GEA Hilge HYGIA & GEA Hilge MAXA (up to 150/400)

Single-stage, VARIPUMP*
4- and 6-pole, 50 Hz

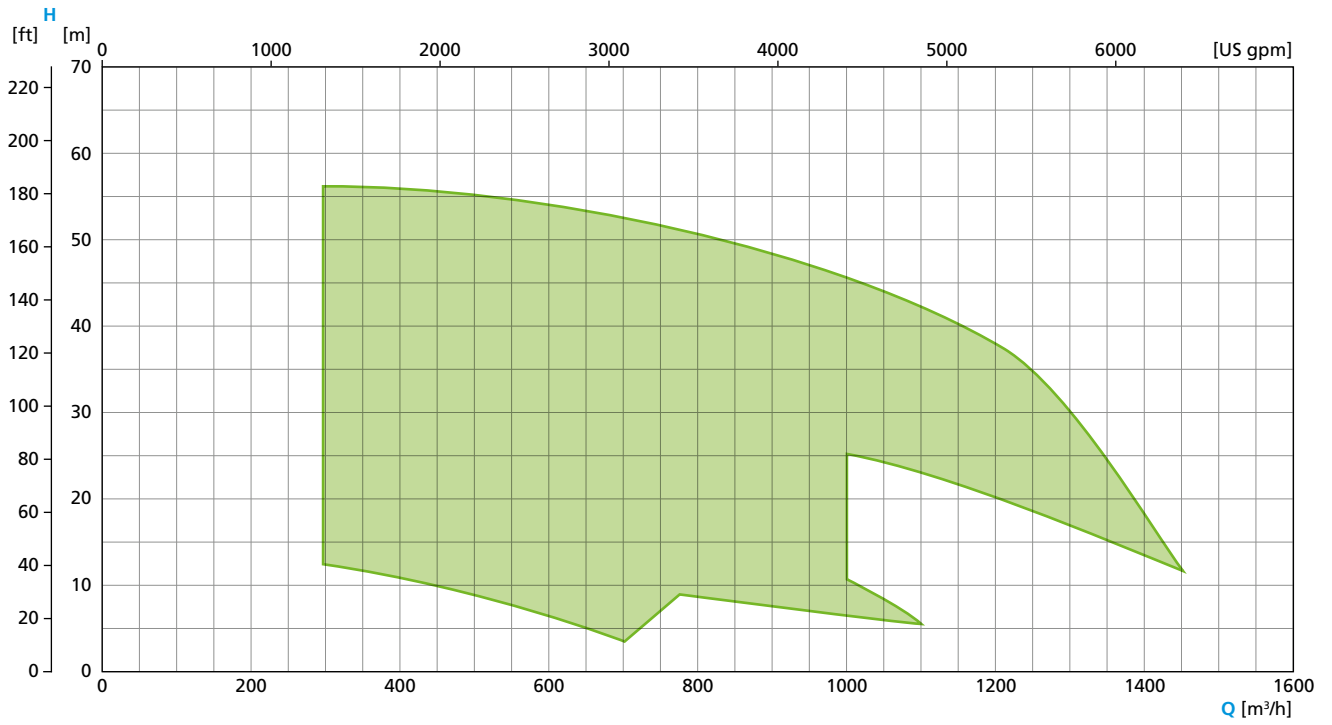


* GEA Hilge MAXA 200/400 and 250/400


Single-stage, VARIPUMP
2-pole, 60 Hz

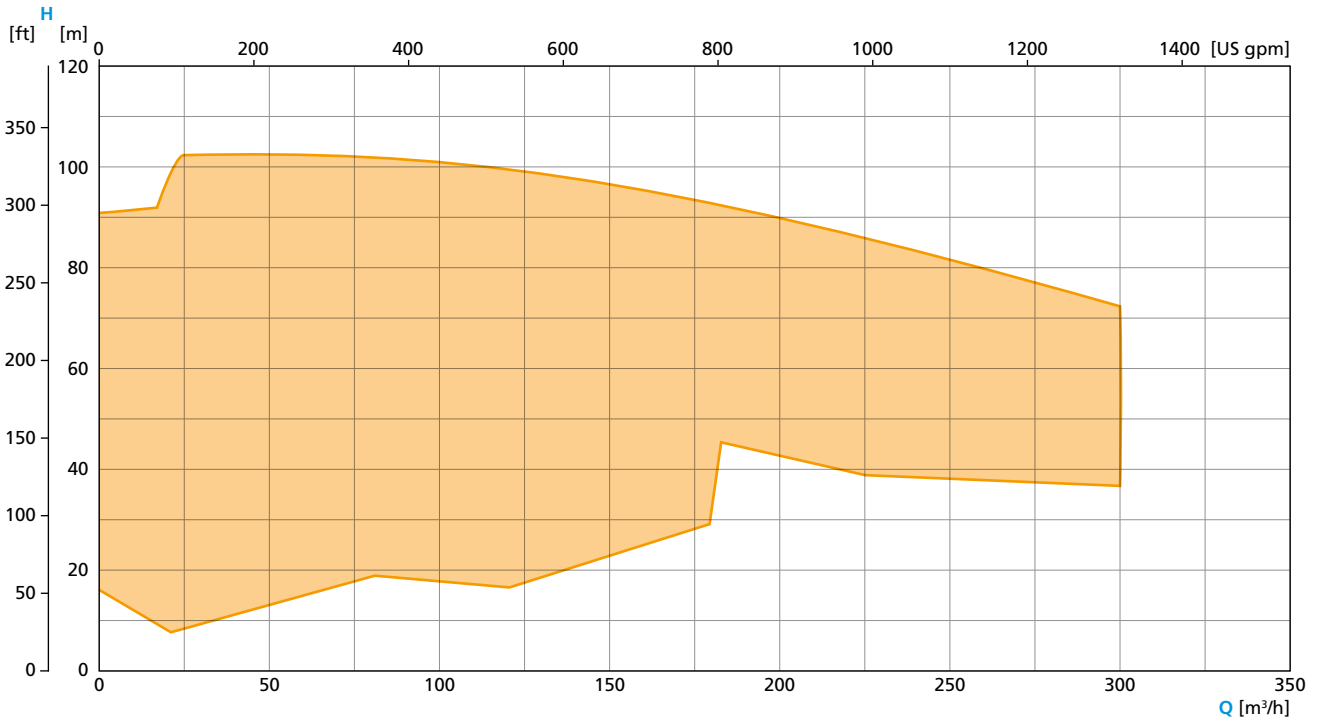


Single-stage, VARIPUMP
4-pole, 60 Hz

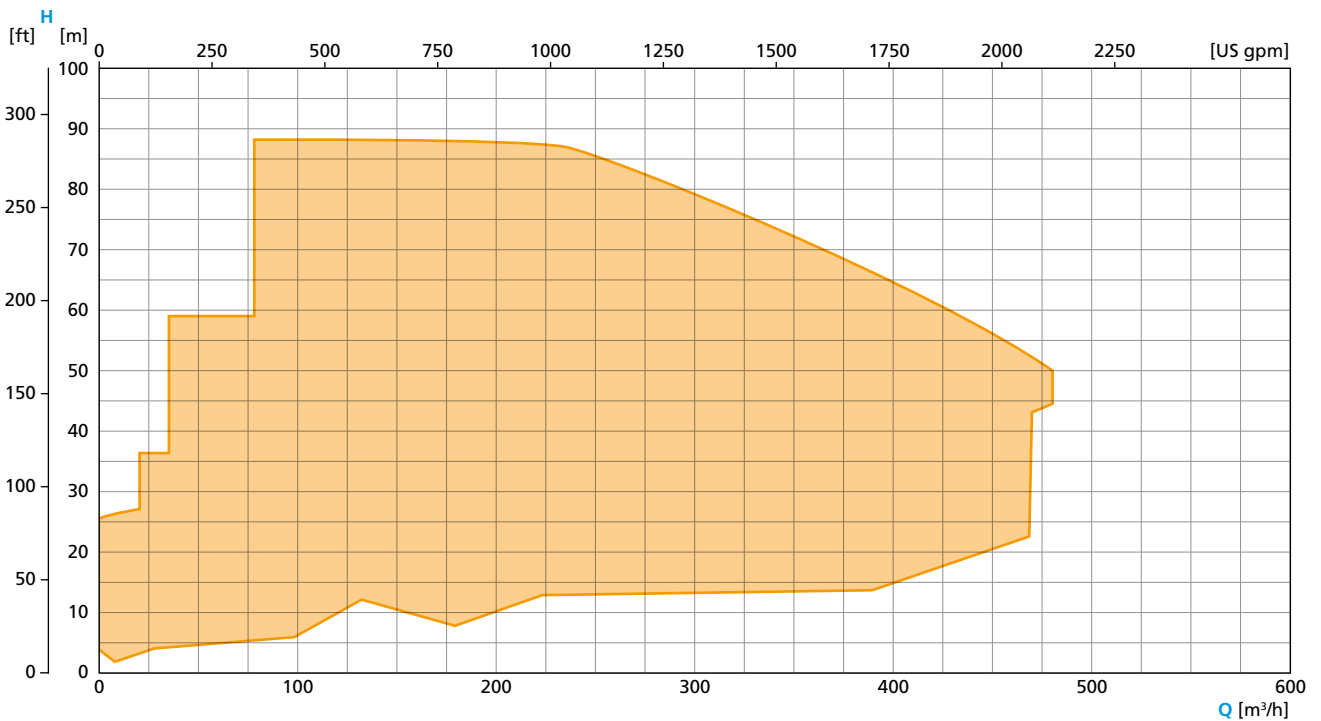


Single-stage, VARIPUMP
6-pole, 60 Hz

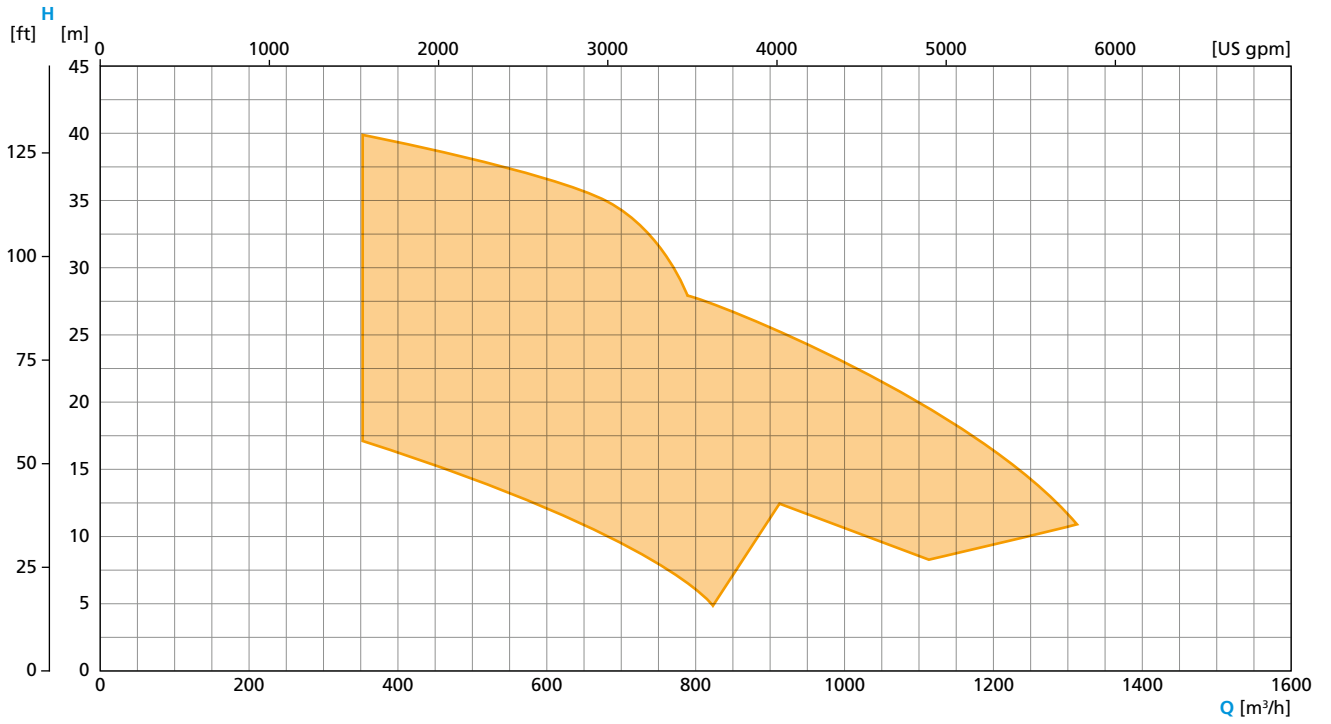


Multi-stage, VARIPUMP
2-pole, 50 Hz

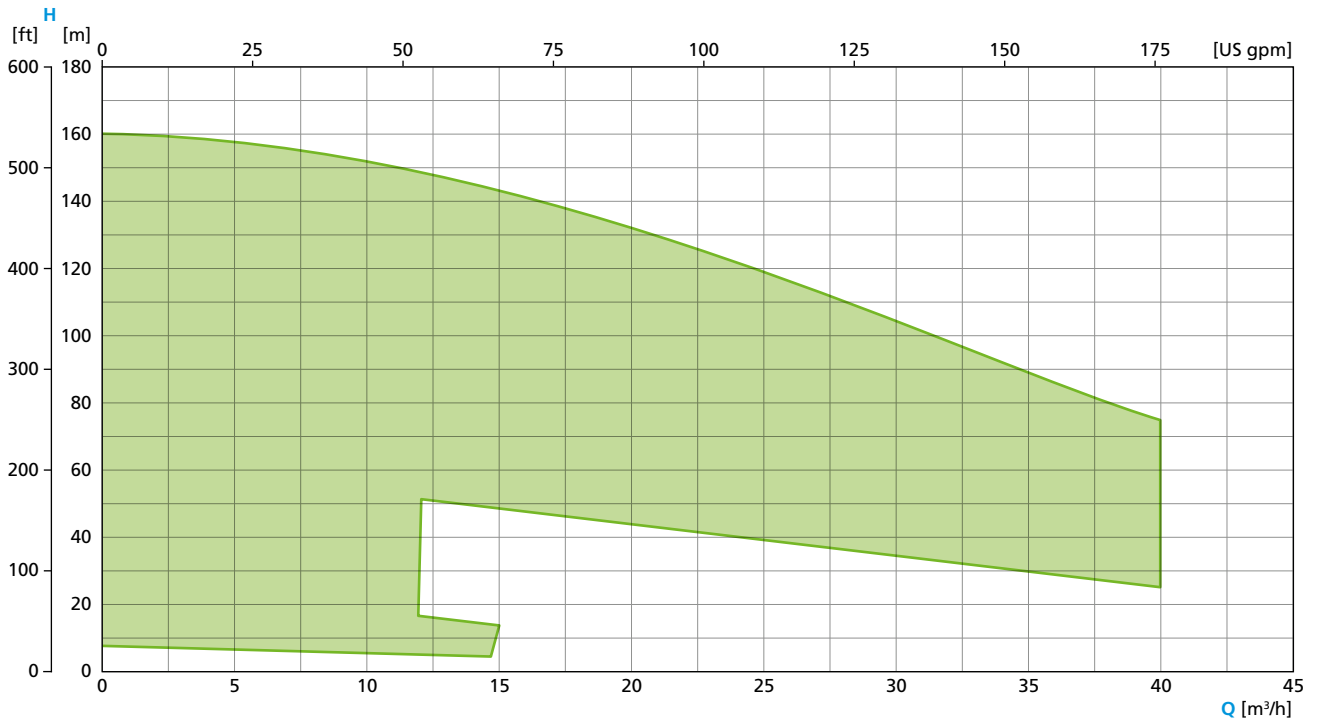


Multi-stage, VARIPUMP
2-pole, 60 Hz

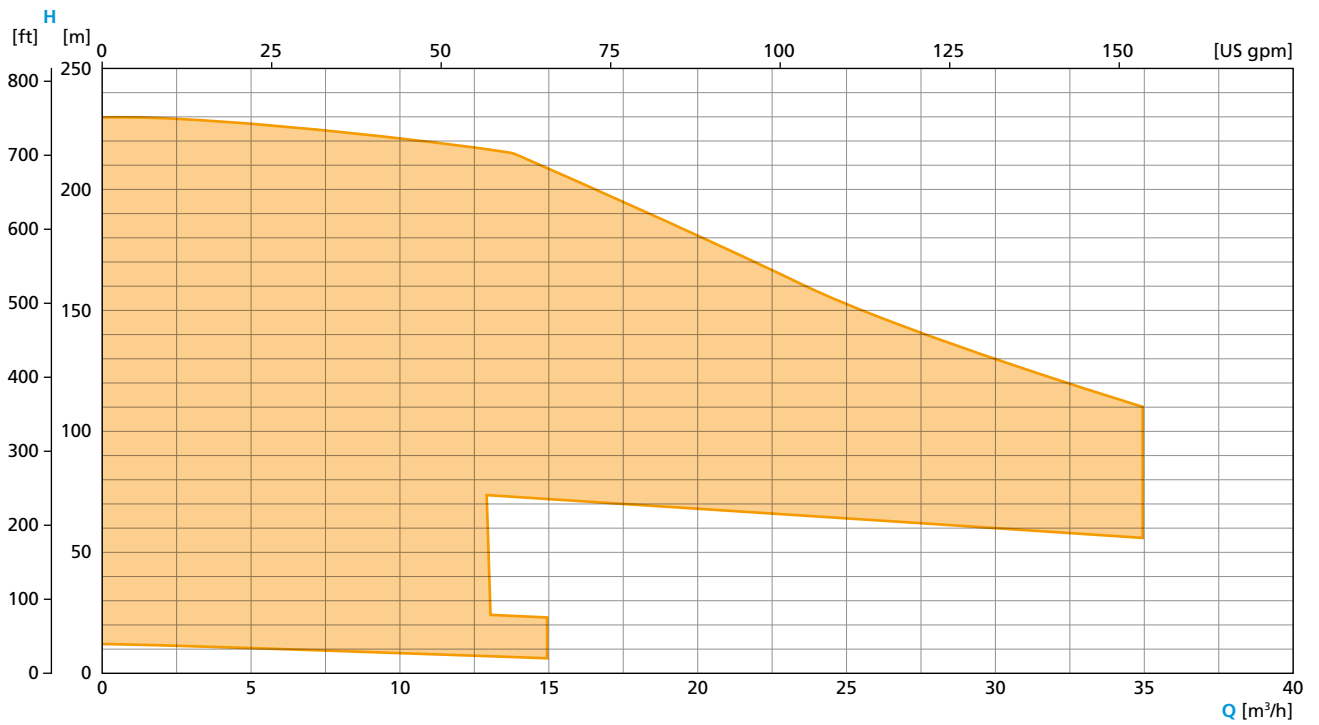


Single-stage, SMARTPUMP
2-pole, 50 Hz

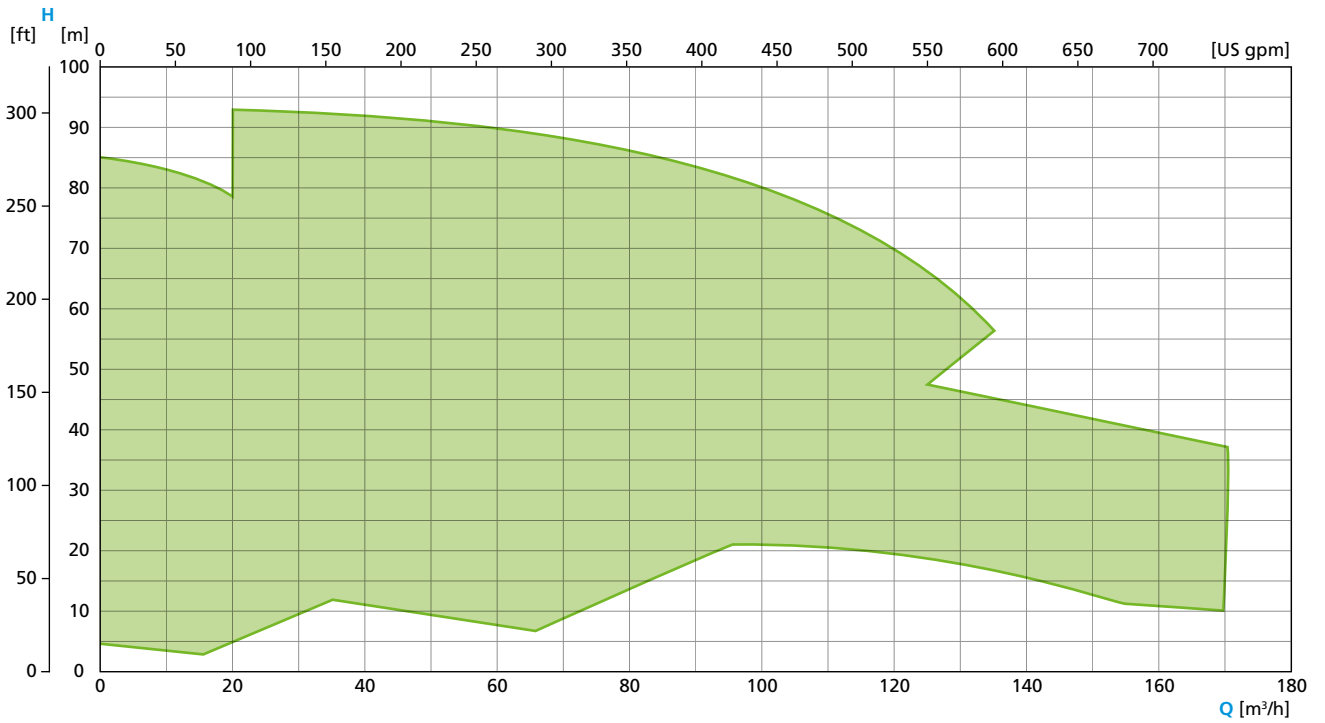


Single-stage, SMARTPUMP
4-pole, 50 Hz

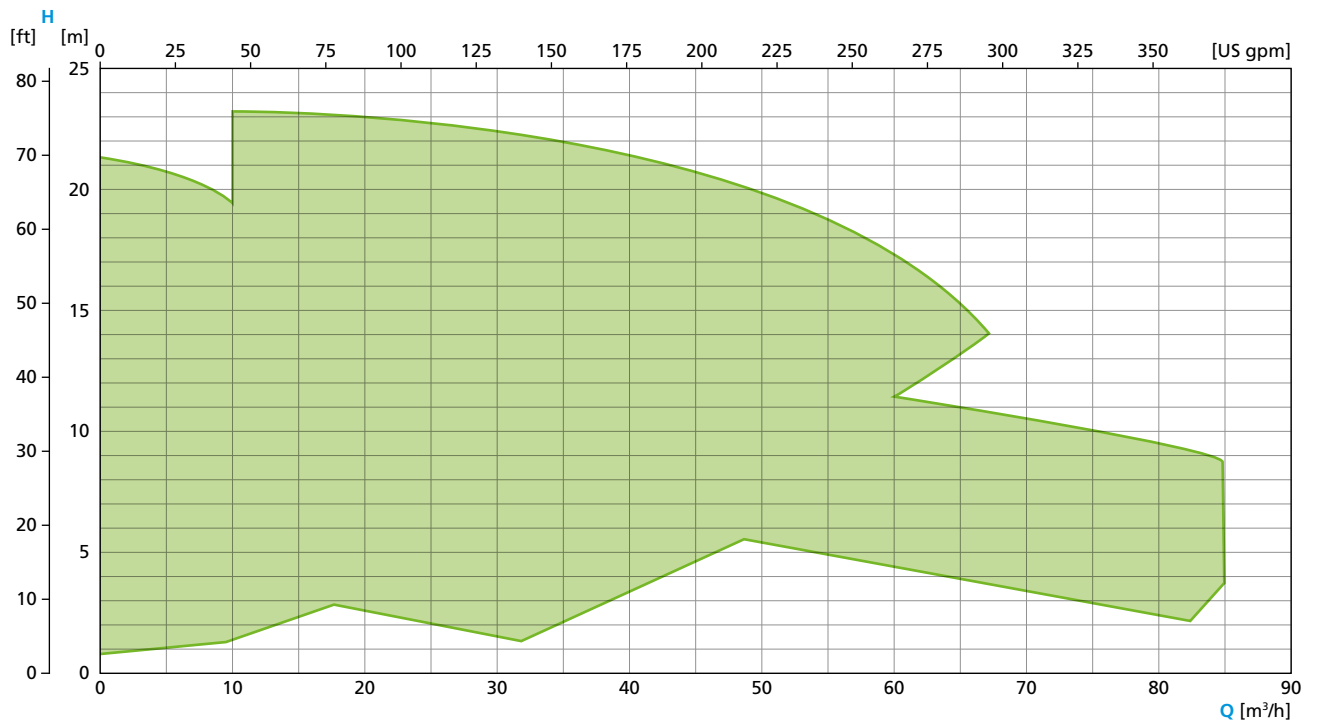


Single-stage, SMARTPUMP
2-pole, 60 Hz

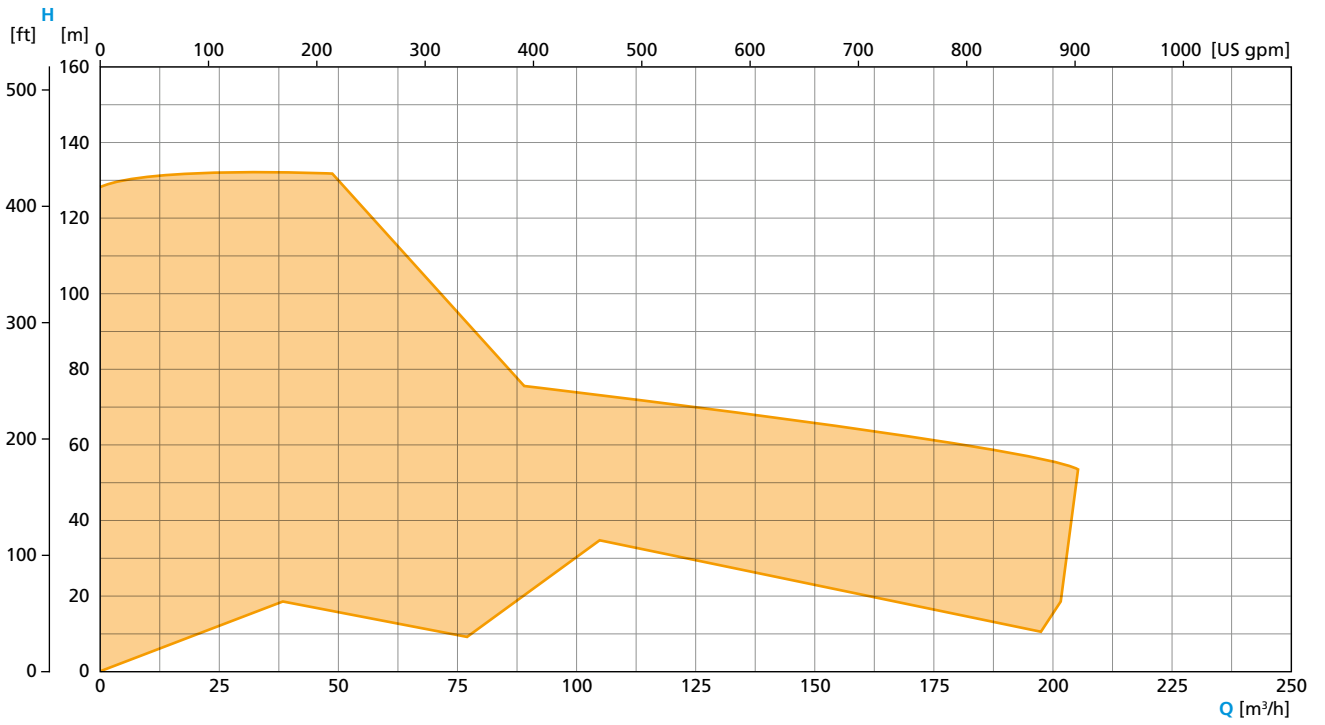


Single-stage, SMARTPUMP
4-pole, 60 Hz

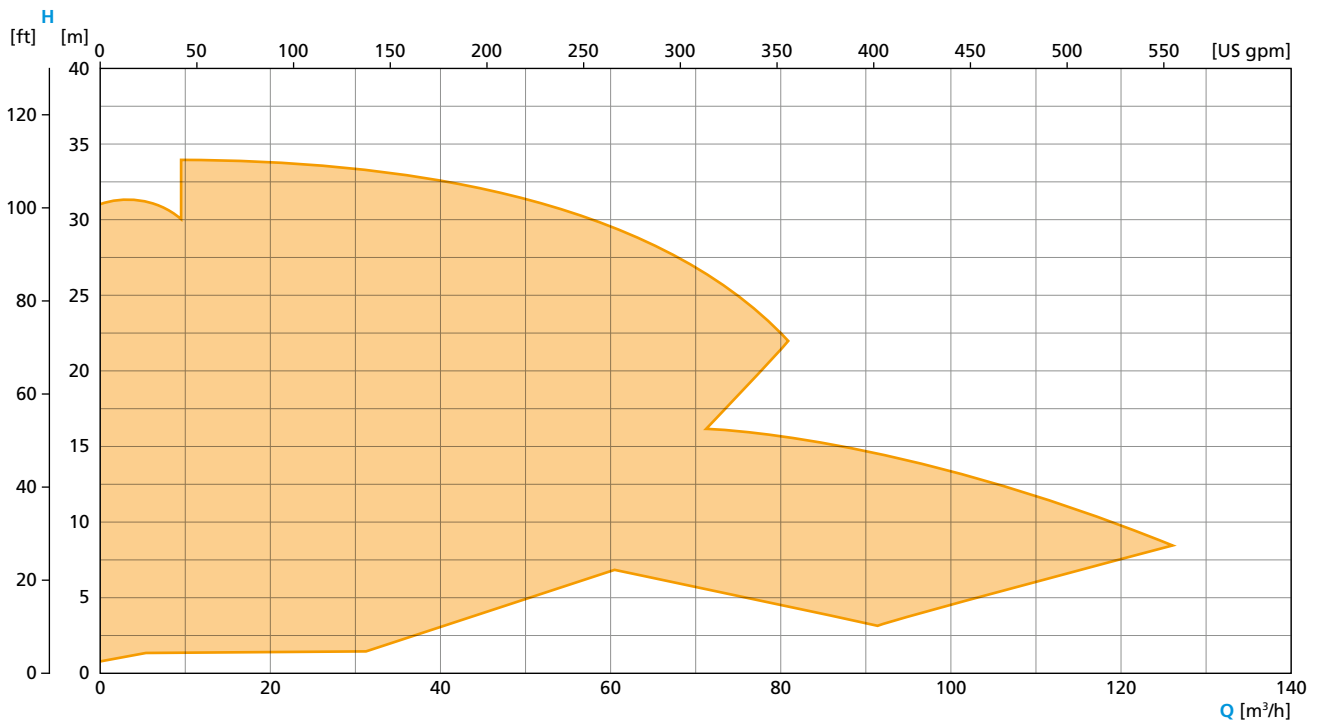


Multi-stage, SMARTPUMP
2-pole, 50 Hz

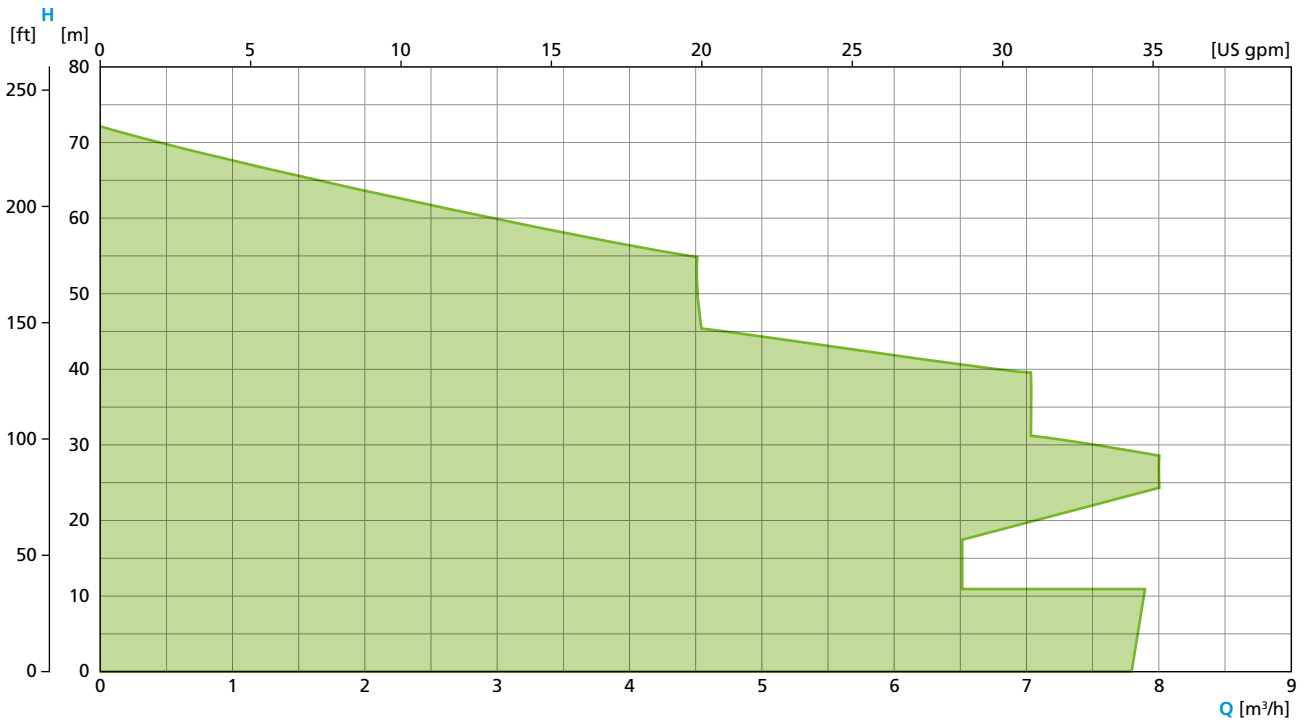


Multi-stage, SMARTPUMP
2-pole, 60 Hz

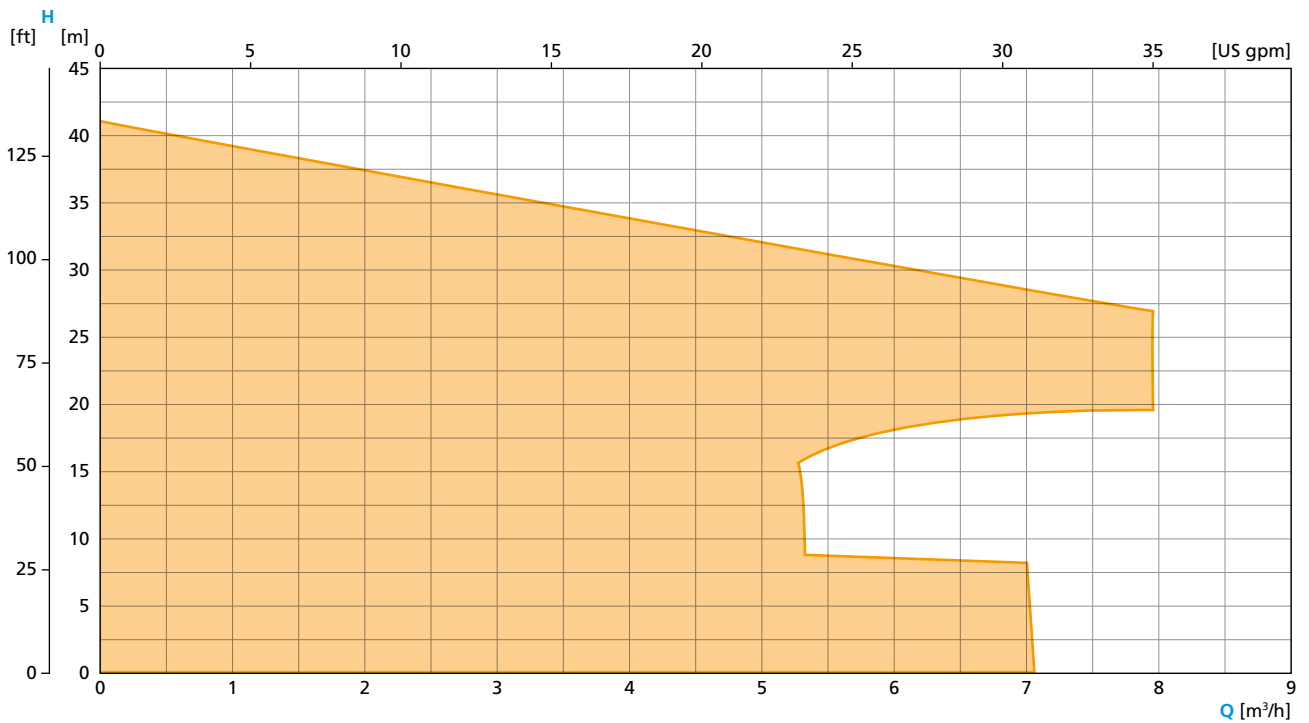


Single-stage, self-priming, VARIPUMP
4-pole, 50 Hz

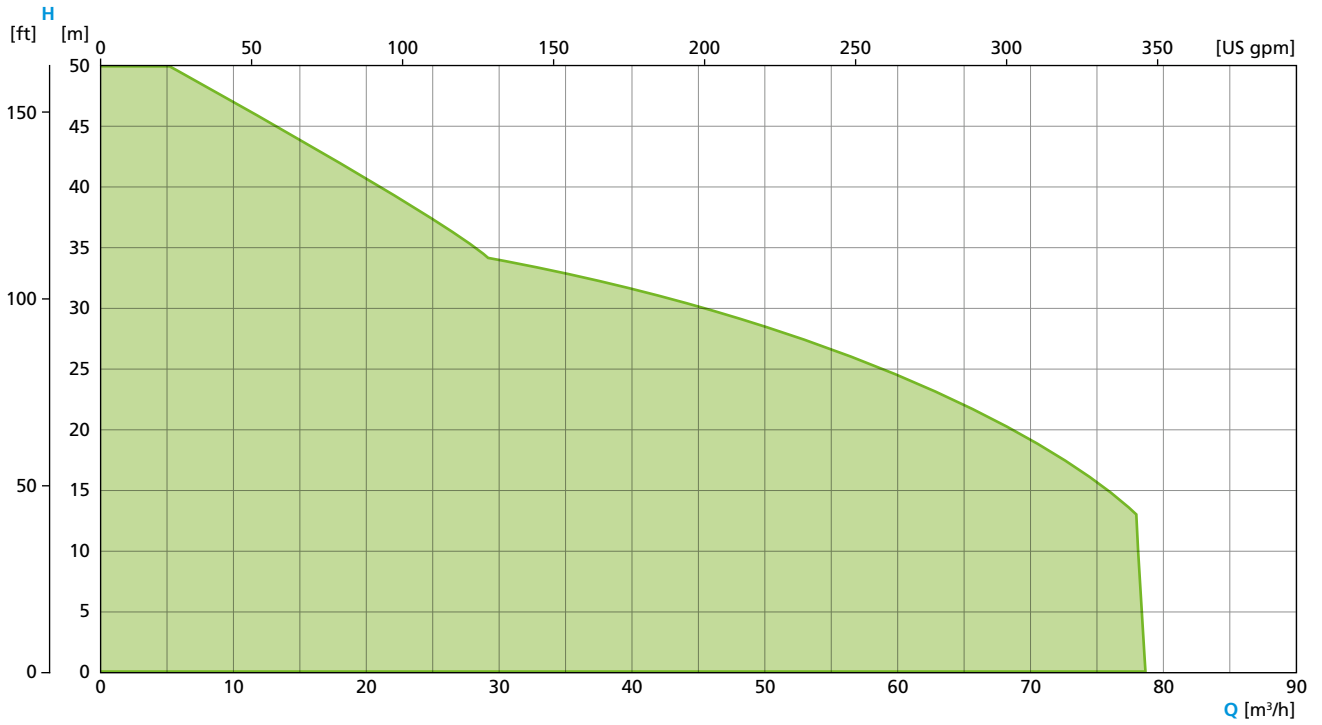


Single-stage, self-priming, VARIPUMP
4-pole, 60 Hz

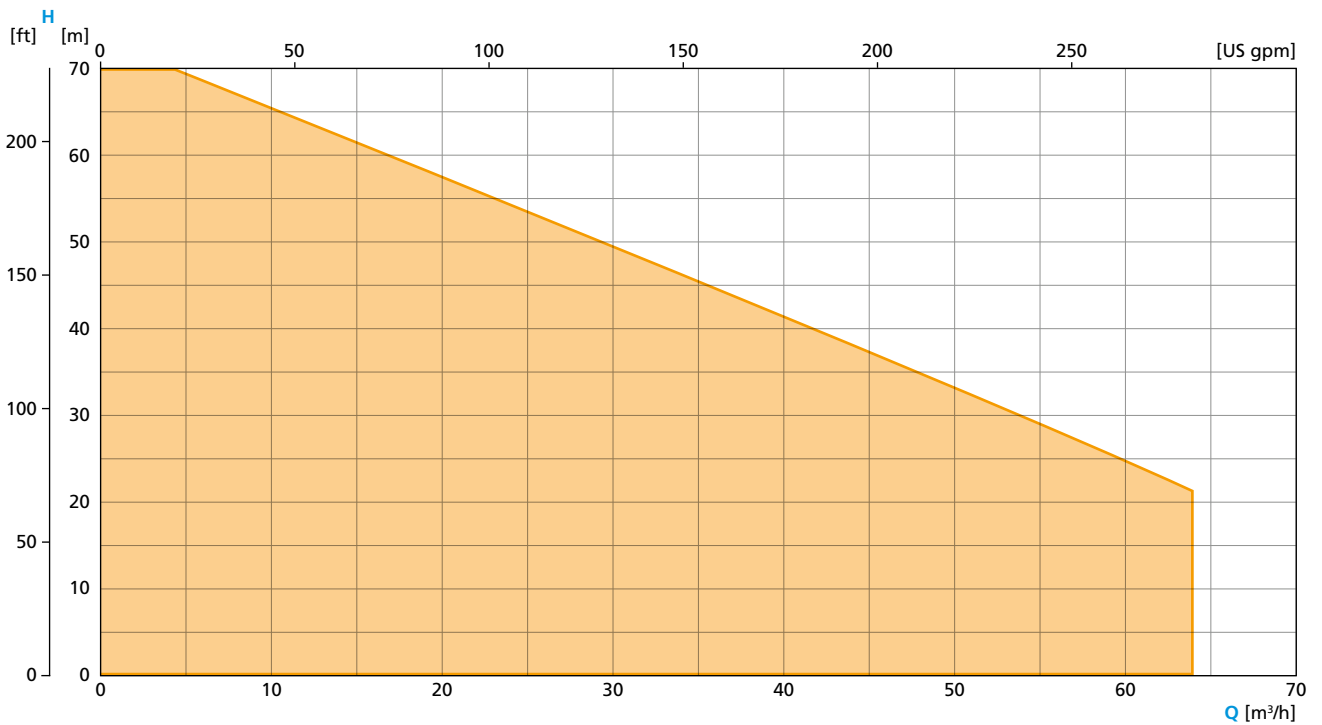


Single-stage, self-priming, SMARTPUMP
2-pole, 50 Hz

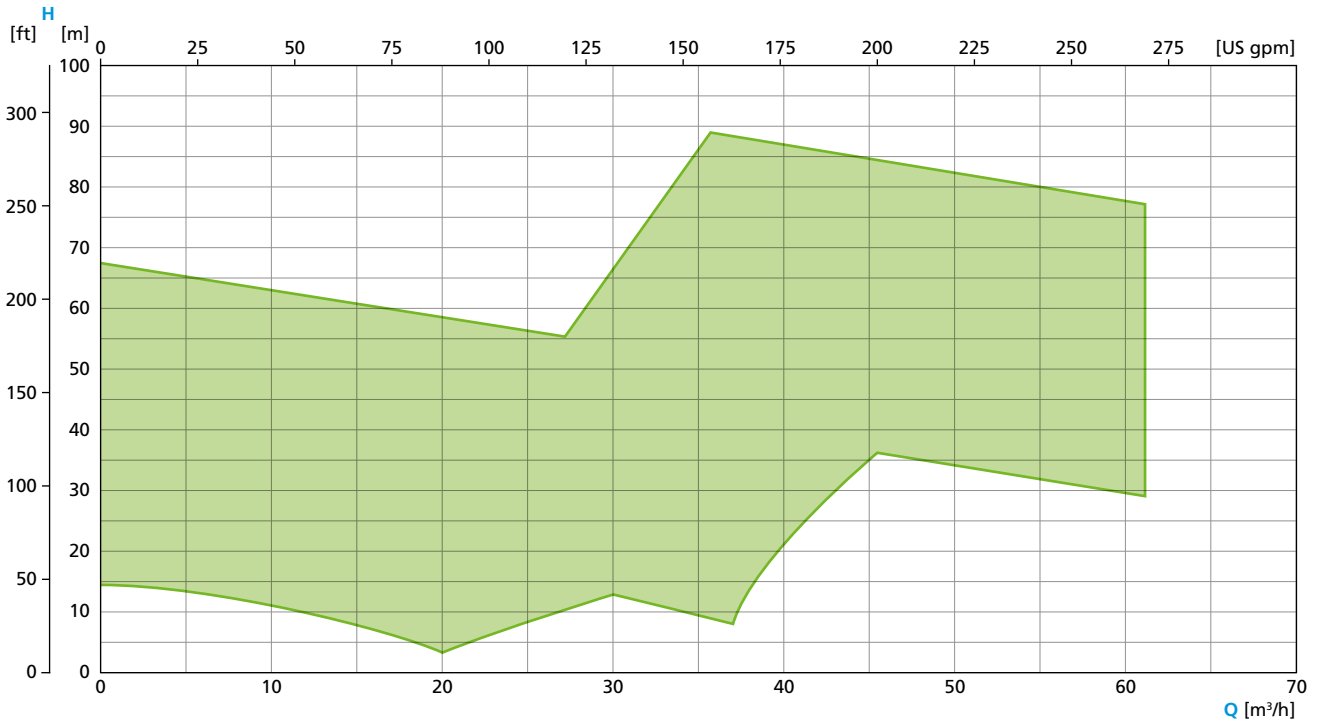

Single-stage, self-priming, SMARTPUMP
2-pole, 60 Hz

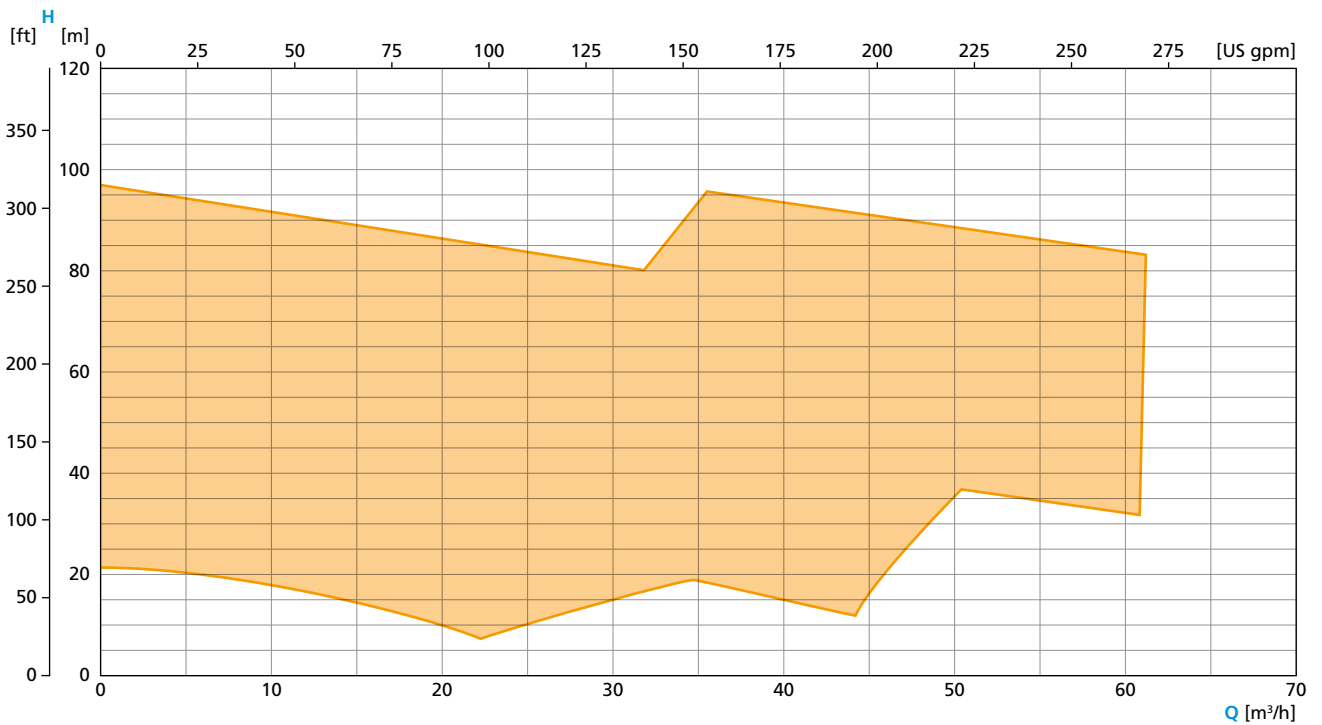

Rotary Lobe Pump, VARIPUMP*

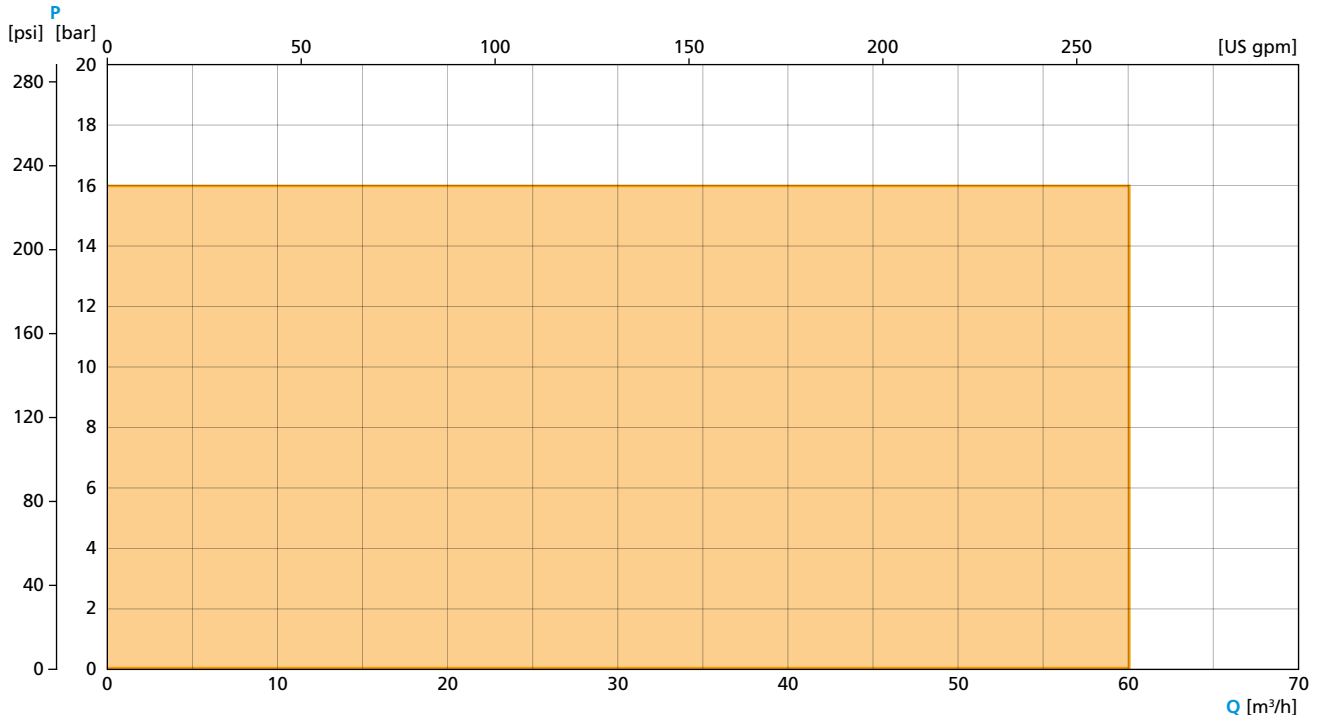

* GEA Hilge NOVALOBE 60 under development

GEA Hilge HYGIA




The “Swiss Knife” among the hygienic pumps. Premium quality and highest flexibility of customization ensure successful application in the food, beverage, and pharma industries.

Technical data	50 Hz	60 Hz
Flow rate	528 US gpm	528 US gpm
Flow head	236 ft	302 ft
System pressure	232 psi	

GEA Hilge MAXA

A single-stage centrifugal pump designed for heavy-duty operation in industrial processes. The major dimensions and characteristics of these pumps correspond to DIN EN 733 and DIN EN 22858.

Technical data	50 Hz	60 Hz
Flow rate	6,384 US gpm	6,384 US gpm
Flow head	328 ft	328 ft
System pressure	145 psi	

GEA VARIPUMP	Wide model range with numerous variants. Customization to specific customer requirements	GEA Hilge HYGIA		GEA Hilge MAXA		
Single-stage end-suction centrifugal pumps						
GEA SMARTPUMP	Clearly defined list of models, limited to standard requirements, no other variants	GEA Hilge TP				

GEA Hilge TP

The GEA Hilge TP is the smart solution for standard applications. The single-stage centrifugal pump suits a wide range of applications and offers uncompromising hygiene and quality.

Technical data	50 Hz	60 Hz
Flow rate	969 US gpm	1,057 US gpm
Flow head	312 ft	427 ft
System pressure	232 psi	

GEA Hilge SIPLA

A single-stage self-priming side channel pump, especially suited for SIP/CIP return systems and applications with high gas content. Right- and left-hand rotation can be freely adjusted for additional application options.

Technical data	50 Hz	60 Hz
Flow rate	343 US gpm	282 US gpm
Flow head	154 ft	197 ft
System pressure	145 psi	

GEA Hilge CONTRA

Single- and multi-stage centrifugal pumps are available in this series. The hygienic design in every detail provides perfect solutions to numerous tasks in sterile and hygienic processes.

Technical data	50 Hz	60 Hz
Flow rate	176 US gpm	154 US gpm
Flow head	525 ft	755 ft
System pressure	232 psi	

GEA Hilge NOVALOBE

This rotary lobe pump has been specifically designed for highly viscous media – and for applications where gentle pumping or dosing is required. The pump is fully drainable and EHEDG certified.


Technical data	50/60 Hz
Cavity volume	0.34 gallons/rev
System pressure	232 psi



Single-stage self-priming centrifugal pumps



Multi-stage centrifugal pumps

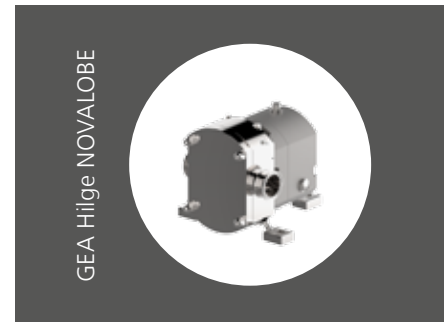


Rotary lobe pumps



GEA Hilge TPS

This self-priming centrifugal pump is the solution of choice especially for emptying tanks as well as for conveying products containing gas, e.g. CIP return systems.

Technical data	50 Hz	60 Hz
Flow rate	550 US gpm	682 US gpm
Flow head	312 ft	453 ft
System pressure	232 psi	

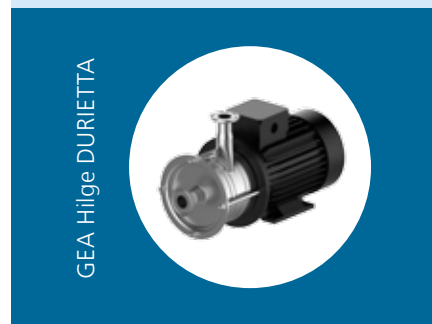

GEA Hilge DURIETTA

This end-suction single- or multi-stage centrifugal pump in a very compact design has been created for applications with low flow rates at high flow heads.

Technical data	50 Hz	60 Hz
Flow rate	35 US gpm	35 US gpm
Flow head	236 ft	135 ft
System pressure	116 psi	

The certificates listed here are valid for corresponding GEA pump models. Pumps conforming to the requirements of the European Hygienic Engineering and Design Group (EHEDG) as well as 3-A Sanitary Standards, Inc. (3-A SSI) are available for numerous fields of application.

Moreover, independent, standardized tests have confirmed the efficient, problem-free cleaning ability of numerous pumps – for optimum safety and economic gain.

EHEDG certificates apply only to the specific pump type as listed. However, they may be transferred to specific other pump types, owing to identical housing designs and flow path geometries.

Document	GEA Hlge HYGIA	GEA Hlge TP /TPS	GEA Hlge CONTRA	GEA Hlge MAXA	GEA Hlge DURETTA	GEA Hlge SIPLA	GEA Hlge NOVALOBE
3-A Sanitary Standard	•	•					
EHEDG certificate	•	•	•	•*			•
FDA declaration of conformity	•	•	•	•	•	•	•
Declaration of compliance with the order 2.1 acc. to EN 10204	•	•	•	•	•	•	•
Test report 2.2 acc. to EN 10204	•	•	•	•	•	•	•
Inspection certificate 3.1 acc. to EN 10204	•	•	•	•	•	•	•
EAC-Certificate	•	•	•	•	•	•	•
Surface roughness test report	•	•	•	•			•
Delta ferrite test report	•		•				•
Acoustic measurement test report	•	•	•	•	•	•	•
USP Class VI – declaration of conformity	•	•	•				•
Certificate in acc. with the regulation (EG) No. 1935/2004	•	•	•	•	•	•	•
Certificate DIN EN ISO 9001:2015	•	•	•	•	•	•	•

Subject to change without notice.

* for selected pump sizes only

GEA Hilge Centrifugal Pump TP

The GEA Hilge Centrifugal Pump TP is designed for pumping demanding media up to a viscosity of 1,000 mPas. Low flow velocities and gentle discharge of media through the spiral housing ensure extremely gentle product handling and high efficiency.

11 pump sizes with a capacity range of up to 1,057 US gpm and pump heads of up to 427 ft w.c. are available, finely tuned to the task at hand.

The spiral housing for the TP series is made of cold-rolled steel. This material has an excellent surface quality, which is essential for optimum cleaning in CIP/SIP processes. Wall thicknesses up to 8 mm provide high strength for critical piping configurations and high inlet pressures.



GEA Hilge TP on 3-A stainless steel adjustable feet

Technical Data

	50 Hz	60 Hz
Head	up to 312 ft	427 ft
Flow Rate	up to 1,057 US gpm	
Operating pressure	up to 232 psi	
Operating temperature	max. 212 °F	
Sterilisation temperature	max. 289 °F (SIP)	
Max. pump efficiency	72 %	

Applications

The GEA Hilge TP pump range is suitable for the following application areas and products due to the hygienic design and material selection:

Breweries

- Beer, wort, yeast, water, CIP solutions

Dairies

- Milk, cream, yoghurt, whey, brine, CIP solutions

Food

- Oils, sauces, stock, brine, flavours, ice-cream mix, CIP solutions

Fields of applications

- Conveying, circulation, pressure boosting, filling lines, filling, emptying, filtration, evaporation, cleaning

Design

GEA Hilge TP pumps are single-stage, end-suction, centrifugal pumps, designed to meet the hygienic requirements of sterile process technology.

The pumps are available in eleven sizes with a variety of flexible versions. The pumps are CIP- and SIP-capable in compliance with the DIN EN 12462 performance criteria. The design fulfills the following requirements:

- 3-A Sanitary Standard
- QHD criteria
- EHEDG
- EAC
- GMP regulations



Certification

ATEX

For use in potentially explosive areas, Adapta pumps are available. These pumps, which possess an EC declaration of conformity in accordance with the ATEX guideline 2014/34/EU, correspond to device categories 2 or 3, and can be used in zone 1 or 2.



ATEX-Symbol

For explanation see chapter certificates on page 26. The pumps fulfil the following surface requirements in terms of the wet end parts:

- Standard: $R_a \leq 125 \mu\text{in}$ (3.2 μm)
- Optional: $R_a \leq 32 \mu\text{in}$ (0.8 μm)

The pump casing is made of heavy-duty, rolled and deep drawn CrNiMo steel 1.4404/1.4435, the equivalent of AISI 316L. The pumps have a mechanical seal and a fan-cooled asynchronous motor to enclosure class IP55.

Open impeller design

- All parts stainless steel, wetted components made of 1.4404 or 1.4409 (AISI 316L)
- Surface roughnesses of $R_a \leq 32 \mu\text{in}$ can be achieved by mechanical treatment of the surface
- Driven by premium efficiency IE3 motors, design type IM B35, according to IEC

Semi-open impeller




The electro-polished, stainless steel, semi-open impeller is available in two versions, according to the application.

Impeller version	Surface finish
Cast	$R_a \leq 125 \mu\text{in}$ (3.2 μm)
Cast	$R_a \leq 32 \mu\text{in}$ (0.8 μm)

The impeller is suitable for low-viscosity liquids and liquids containing low content of particles.

Materials

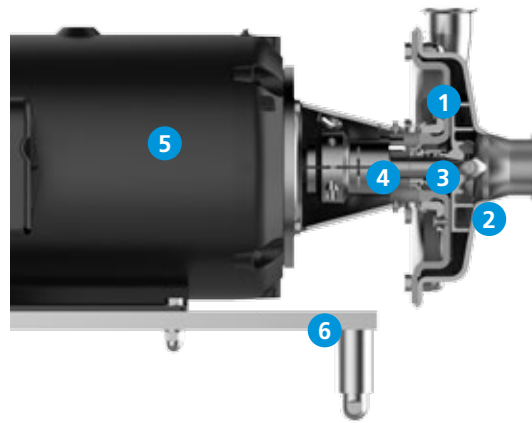

Material overview GEA Hilge TP

Item	Component	Material	No.
1	Impeller	CrNiMo steel	316L (1.4409)
2	Pump casing	CrNiMo steel	316L (1.4404)
3	Seal	Single mechanical seal carbon/stainless steel, SiC/SiC and carbon/SiC	
4	Pump shaft without key	CrNiMo steel	316L (1.4404)/304 (1.4301)
5	Motor	Rolled steel, cast iron	
6	Foot	Stainless steel	

Intended use of motor

The range of motors differentiales general purpose and wash-down motors. These types vary in resistance against humidity and general conditions in the plants. We recommend the use of wash-down motors in case one or more of the following boundary conditions apply:

- Continuous exposure to high-humidity (100 %) environments
- Continuous exposure to saline (5 %) environments
- IP X6 (Water projected in powerful jets – 0.5 inch nozzle – against the enclosure from any direction, Water volume: 26.42 gallons per minute, Pressure: 0.15 psi at distance of 9.84 ft)
- Use of alkaline cleaners such as Potassium Hydroxide or Sodium Hydroxide at low concentrations during wash-down routines
- Presence of animal fats, mineral or vegetable oils, detergents or ethylene glycol

Coating

Components not made of stainless steel are provided with one of the following coatings, depending on the design:

Version	Paint/coating	Coating thickness
Primer	2K epoxy resin	1,181–2,362 µin (30–60 µm)
	KTL coating	591–787 µin (15–20 µm)
Top coating	2K epoxy resin	1,969–2,756 µin (50–70 µm)
	2K polyurethane color	2,362 µin (60 µm)
	KTL coating	591–787 µin (15–20 µm)

Surface design

Selected components are electro-polished in order to improve the surface and protect it against corrosion.

Surface	Electro-polished components
$R_a \leq 125 \mu\text{in}$ (3.2 µm)	Casing
$R_a \leq 32 \mu\text{in}$ (0.8 µm)	All components that come into contact with the pumped fluid

Lantern (motor stool) and cast impeller not electro-polished.

Sealing according to the VARIVENT® principle

The special groove ensures that the seal is kept reliably in place at all times. The shape of the groove is based on FEM analyses. The metallic stop allows a defined compression of the seal, ensuring gap-free sealing against the product chamber without dead corners. System pressure up to 230 psi.



O-ring sealing between pump housing and cover

Mechanical seal

GEA Hilge offers the following seal designs:

- Single mechanical seal
- Single mechanical seal, flushed (Quench)
- Double mechanical seal

The pumps of the GEA Hilge TP range are equipped with single internal mechanical seals optimally arranged in the pump.

This ensures efficient lubrication and cooling of the mechanical seal. CIP and SIP-capability is fulfilled according to hygienic design criteria.

The standard material for the mechanical seals is carbon/SiC with EPDM elastomers. Other executions and materials are available on request.

For further information on mechanical seals, see page 39.

Design variants

Standard version	Description
GEA Hilge TP	Horizontal installation, plug-in shaft, standard motor

GEA Hilge offers each pump range in different designs. See design variants on page 33.

Design K

GEA Hilge sterile and process pumps in compact K design require small installation space. The pump is equipped with a plug-in shaft.

The modular design enables numerous installation designs.



GEA Hilge TP on 3-A stainless steel adjustable feet



GEA Hilge TP on stainless steel adjustable feet

Designs


The following overview lists common designs, installations and versions:

- On 3-A stainless steel adjustable feet
- On stainless steel adjustable feet

Additional versions on request.


Terminal box position

This terminal box positions are possible for all pumps without shroud.

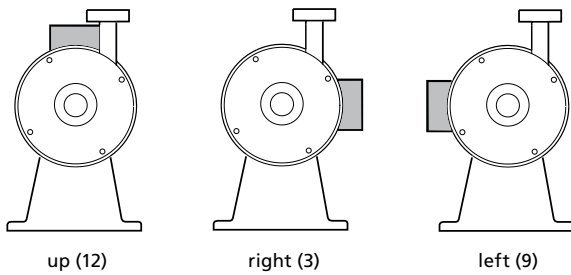

Possible terminal box positions

Positioning of discharge port and terminal box

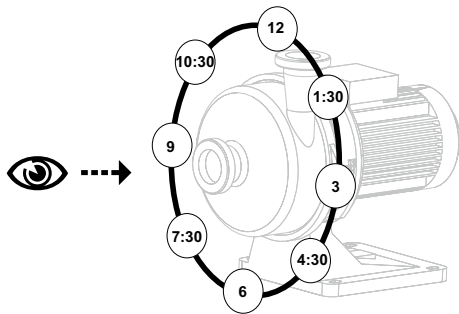

Positioning of discharge port and terminal box for horizontal pumps

Pump connections

GEA Hilge offers the following standard connections for the GEA Hilge TP pump range:

- Tri clamp

Additional connections such as sterile connections in accordance with DIN 11853, SMS, RJT, DIN or ISO clamp connections are available on request.

Selected connections also available with drain port. You can find additional information in the connection selection guide from page 36 to 38.

Noise emissions

Measured values according to DIN EN ISO 3746 for pump units, measurement uncertainty 3 dB(A).

Type	Lpfa [dB (A)]
TP 1020	63
TP 1540	67
TP 2030	74
TP 2050	74
TP 2575	77
TP 3050	74
TP 5060	74
TP 7060	77
TP 8050	78
TP 8080	77
TP 16040	83

The noise emissions of a pump are significantly affected by the given application. The values given here therefore serve only as a guide. Please contact GEA Hilge for more detailed information.

Features and benefits

Features
EHEDG certified and consistent implementation of hygienic design
Pump casing made from rolled steel with thick walls
Modular construction. Connections, mechanical seal, placements, etc. may be combined on an individual basis
Motors with special voltages and frequencies, special coatings, special connections and sizes, drain ports and much more
Service kits for all standard mechanical seals
Task-specific certificates for components

Benefits
Process safety and optimal cleaning ability
Durable and robust
Duty-point-precise sizing, good NPSH value and coefficient of performance
Low spare parts inventory
Service-friendliness

Motors

GEA Hilge TP

P2 [hp]	Frame size	2-pole	4-pole
1.0	143TC	•	•
1.5	143TC	•	•
2.0	145TC	•	•
3.0	182TC	•	•
5.0	184TC	•	•
7.5	213TC	•	•
10.0	215TC	•	•
15.0	254TC	•	
20.0	256TC	•	
25.0	284TSC	•	
30.0	286TSC	•	
40.0	324TSC	•	
50.0	326TSC	•	
60.0	364TSC	•	

Motor protection

Three-phase motors should be connected to a motor-protective circuit breaker.

All three-phase mains-operated standard motors can be connected to an external frequency converter. When a frequency converter is connected, the motor isolation is often overloaded, making the motor louder than during normal operation. In addition, large motors will be exposed to bearing currents caused by the frequency converter.

The following should be taken into account when operating a frequency converter:

- In the event of special noise protection requirements, motor noise can be reduced by using a dU/dt filter between the motor and the frequency converter. For noise-sensitive environments, we recommend using a sinus filter.
- The length of the cable between motor and frequency converter affects the motor load. For this reason, check whether the cable length corresponds to the specifications issued by the supplier of the frequency converter.
- For supply voltages between 500 and 690 V, fit either a dU/dt filter to reduce voltage peaks, or use a motor with reinforced insulation.
- For supply voltages of 690 V, use a motor with reinforced insulation, and fit a dU/dt filter.

Design

The motors are totally enclosed, fan-cooled, C-face standard motors with main dimensions and electrical tolerances acc. NEMA-MG1.

Pump range	Design – NEMA-MG1
GEA Hilge TP	IM 3001 (IM B5) IM 2001 (IM B35)

Relative air humidity: Max. 95 %

Enclosure class: IP55

Insulation class: F according to NEMA-MG1

Ambient temperature: Max. 104 °F (standard motor)

Motor data	Efficiency class		
	50 Hz	60 Hz	PTC
1.0	NEMA Premium Efficiency (IE3)		•
1.5			•
2.0			•
3.0			•
5.0			•
7.5			•
10.0			•
15.0			•
20.0			•
25.0			•
30.0			•
40.0			•
50.0			•
60.0	•		

Selecting according to the application

The table below is intended as a general guide. Selection of connection often depends on on-site conditions.

Connection		Application																
Type	Standard	Beverages					Food				Industrial applications				Cleaning			
		Beer	Wine	Juice	Alcohol	Soft drinks	Confectionery	Dairy products	Frying oil	Syrup	Glue and paint	Purification products	Chemical products	Industrial wastewater and efflux	Surface treatment products	Biofuel	CIP	SIP
Clamps	ASME/ DIN 32676 tri-clamp	•	•	•	•	•	•	•	•	•	•						•	•
	Q-line clamp		•	•	•	•	•	•	•	•							•	
	I-line clamp		•	•	•	•	•	•	•	•							•	•
Flanges	VARIVENT® flange		•	•	•	•	•		•								•	•
	ANSI-B 16.5 flange	•				•			•		•	•	•		•	•	•	•
	DIN 11864-2/ DIN 11853-2 flange		•	•	•	•			•		•	•					•	
Threads	NPT thread										•	•	•		•	•	•	•
	SMS thread		•	•		•												
	ACME bevel thread	•	•	•		•	•	•									•	
	DIN 11851 thread		•	•													•	

- Commonly used connections

Design

The following tables show the design of the different connection types.





Clamps

Applications	Standard	Design	Description of the components
<ul style="list-style-type: none"> Beverage Industry Food Industry Cosmetic Industry Cleaning System (CIP/SIP) 	DIN 32676 Class C (Tri-Clamp® / ASME BPE)		0121a: Clamp connection at pump casing 0121: Clamp connection 0410: Profile gasket 0501: Clamp ring
<ul style="list-style-type: none"> Beverage Industry Food Industry Cosmetic Industry Cleaning System (CIP/SIP) 	I-Line (ASME BPE)		0121a: Clamp connection at pump casing 0121: Clamp connection 0400: Profile gasket 0501: Clamp ring
<ul style="list-style-type: none"> Beverage Industry Food Industry Cleaning System (CIP) 	Q-Line (ASME BPE)		0121a: Clamp connection at pump casing 0121: Clamp connection 0400: Profile gasket 0501: Clamp ring

Flanges

Applications	Standard	Design	Description of the components
Aseptic Flange			
<ul style="list-style-type: none"> Food Industry Beverage Industry Cosmetic Industry Cleaning System (CIP) 	DIN 11864-2/ 11853-2 Form A		0122a: Flanged connection at pump casing 0122: Flanged connection 0412: O-ring 0901: Hexagon head screw 0920: Hexagon nut
Flange			
<ul style="list-style-type: none"> Food Industry Beverage Industry Cleaning System (CIP) 	VARIVENT® (ASME BPE)		0122a: Flanged connection at pump casing 0122: Flanged connection 0412: O-ring 0554: Washer 0901: Hexagon head screw 0920: Hexagon nut
<ul style="list-style-type: none"> Beverage Industry Food Industry Cleaning System (CIP) Industrial Applications 	ANSI-B 16.5 150lb/sq. in		0122a: Flanged connection at pump casing 0122: Flanged connection 0400: Gasket 0554: Washer 0901: Hexagon head screw 0920: Hexagon nut

Threads

Applications	Standard	Design	Description of the components
<ul style="list-style-type: none"> Industrial Applications Cleaning System (CIP) 	<p>NPT (ASME-BPE)</p>		<p>120: Threaded connection at pump casing</p>
<ul style="list-style-type: none"> Beverage Industry 	<p>SMS (ISO 2037)</p>		<p>0120a: Threaded connection at pump casing 0120: Threaded connection 0411: Joint ring 0925: Grooved union nut</p>
<ul style="list-style-type: none"> Beverage Industry Food Industry Cleaning System (CIP) 	<p>ACME Bevel</p>		<p>0120a: Threaded connection at pump casing 0120: Threaded connection 0925: Grooved union nut</p>
<ul style="list-style-type: none"> Beverage Industry Cleaning System (CIP) 	<p>DIN 11851</p>		<p>0120a: Threaded connection at pump casing 0120: Threaded connection 0411: Joint ring 0925: Grooved union nut</p>

In order to ensure correct operation (depending on the application and the medium), single or single mechanical flushed seal systems can be supplied. The mechanical seal is optimally placed inside the pump. This ensures efficient lubrication and cooling of the mechanical seal, while also

ensuring CIP (Cleaning In Place) and SIP (Sterilisation In Place) capability. The standard material for the mechanical seals are carbon/stainless steel or SiC/SiC with EPDM or FKM (Viton) elastomers.

Mechanical seals

The operating range of the seal depends on the liquid, the type of seal, the operating pressure and the liquid temperature.

The seal types described below are standard seal types; other seals are available on request.

Version	Material pairs stationary seal face/O-rings	Max. pressure	Max. temperature
Encapsulated spring	silicon carbide /silicon carbide /EPDM silicon carbide /silicon carbide /FKM carbon/stainless steel/EPDM carbon/stainless steel/FKM carbon/SiC/EPDM carbon/SiC/FKM	232 psi	23 to 212 °F

Special seals available in different materials up to 365 psi.


Mechanical seal arrangements

Arrangement	Design	Components
Double-acting mechanical seal		11: Slide ring holder 120.1: Face seal ring, primary 120.5: Stationary seal ring 120.6: Face seal, secondary
Single-acting mechanical seal		100.1: Face seal ring 100.2: Stationary seal ring 110.6: Spring
Single-acting mechanical seal, flushed		11: Slide ring holder 100.1: Face seal ring 100.2: Stationary seal ring 110.1: Shaft protection sleeve 110.2: Shaft seal 110.6: Spring

Mechanical installation

GEA Hilge TP


Never install the pump vertically!

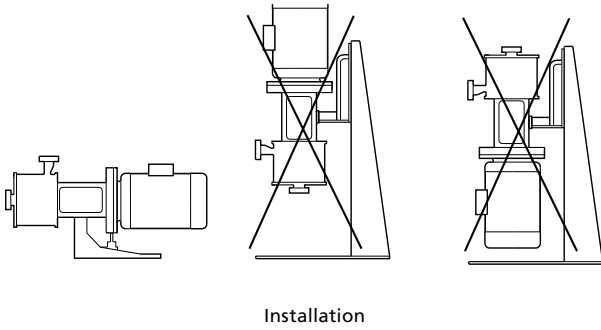

Space requirements

Horizontal installation

- Pumps fitted with motors up to and including 5.0 hp require an 11.81 inch clearance behind the motor.
- Pumps fitted with motors of 7.5 hp and up require at least a 1 meter clearance above the motor and 11.81 inch behind it to allow the use of lifting equipment.

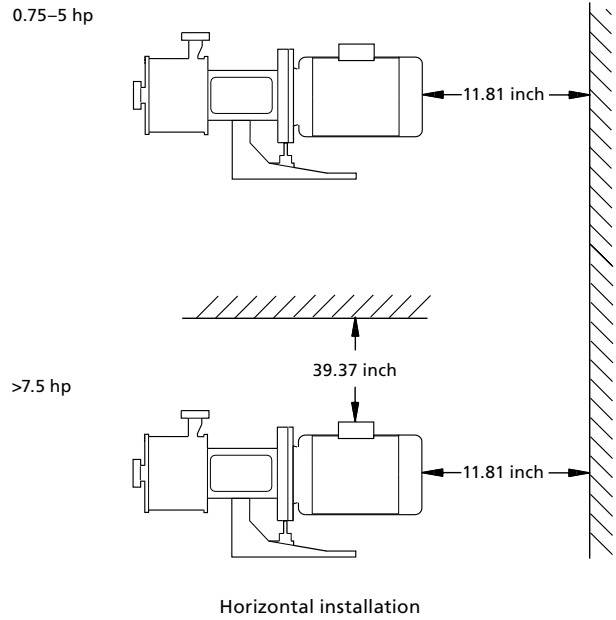


Elimination of noise and vibrations

In order to achieve optimum operation and minimum noise and vibration, consider vibration dampening of the pump. Generally, always consider this for pumps with motors above 15 hp. Smaller motors, however, may also cause undesirable noise and vibration.

Noise and vibration are generated by the rotation in the motor and pump and by the flow in the pipework and fittings. The effect on the environment is subjective and depends on correct installation and the state of the remaining system.

Foundation

Vibration dampening is best achieved by installing the pumps on a plane and rigid concrete foundation.

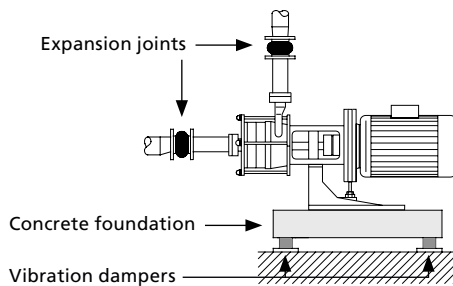

Example of a pump foundation

As a guideline, the weight of the concrete foundation should be 1.5 times the pump weight.

Vibration dampers

To prevent vibrations from being transmitted to the building, we recommend that you isolate the pump foundation from buildings by means of vibration dampers.

The selection of the correct vibration dampers requires the following data:

- Forces that will be transmitted through the vibration dampers
- Motor speed, taking speed control into account as needed
- Required dampening in % (suggested value is 70 %).

The right damper varies from installation to installation, and the wrong damper may increase the vibration level. Vibration dampers should therefore be sized by the supplier.

Expansion joints

If the pump is installed on a pedestal with vibration dampers, expansion joints must always be fitted on the pipeline connections. This is important to prevent the pump from "hanging" in the connections.

Install expansion joints in order to

- absorb expansion/contractions in the pipework caused by variable liquid temperatures
- reduce mechanical strains that occur in connection with pressure surges in the plant
- isolate mechanical structure-borne noise in the pipework (only rubber bellows expansion joints).

Note: Do not install expansion joints to compensate for inaccuracies in the pipework such as center displacement of flanges.

Fit expansion joints at a distance of at least 1 to 1.5 times the nominal flange diameter away from the pump on the suction as well as on the discharge side. This will prevent the development of turbulence in the expansion joints, resulting in better suction conditions and a minimum pressure loss on the discharge side.

We always recommend expansion joints with limiting rods for flanges larger than DN 100/4".

The pipes should be anchored so that they do not stress the expansion joints and the pump. Follow the supplier's instructions and pass them on to advisers or pipe installers.

The values for density and viscosity given here are ratios and can deviate in practice.

Application beer

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem
Altbier	< 212	10	1	aeE (up to 145 psi), aiH (from 145 psi)	-	-
Beer						
Beer mix						
Berliner Weisse						
Bock beer						
Craft beer						
Export beer						
Full beer (Vollbier)						
Green beer						
Herb beer						
Lager						
Light beer						
Martzen (Märzen)						
Non-alcoholic beer						
Pils						
Pilsener						
Ringed (Kräusen)						
Wheat beer						
Cold wort	< 104	< 11	< 5	aeE (up to 145 psi), aiH (from 145 psi)	-	-
Original wort	< 212	< 11	< 5	-	kiE/WDR	kiE/aeE
Hop extract (dissolved)	104-194	< 11	< 5	-	kiE/WDR	kiE/aeE
Lees	104-239	< 11	< 5	-	kiE/WDR	kiE/aeE
Mash (beer)	< 68	< 11	< 100	aeE	-	-
Lauter wort	< 140	< 11	< 5	aeE	-	-
Hot wort	< 212	< 11	< 5	kiV (up to 233 psi), kil (up to 363 psi)	-	-
Crop yeast	< 212	< 12	< 5	kiV (up to 233 psi), kil (up to 363 psi)	-	-
Pitching yeast						
Yeast						
Enzymes (watery dissolution)						
Lactic acid, con. < 50% (C3H6O3)						
Lactic acid, con. > 50% (C3H6O3)						

Application water

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem
Iced water	25 to 37	< 10	1	kiE (up to 145 psi), kiH (from 145 psi)	-	-
Cold water	< 230	< 10	1	aeE (up to 145 psi), aiH (from 145 psi)	-	-
Deminerilised water (Not for sterile applications)						
Drinking water						
Flushing water						
Hot water						
Mineral water						
Process water						
Service water						
Water						

Application wine/sparkling wine

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem
Champagne						
Cherry wine						
Cider						
Cidre						
Dry sparkling wine						
Fruit wine						
Prosecco	< 95	< 10	1	aeE (up to 145 psi), aiH (from 145 psi)	-	-
Red wine						
Rosé wine						
Sparkling wine						
Strawberry wine						
White wine						
Wine						
Young wine						
Dessert wine						
Dessert wine, late-harvest wine	< 95	< 11	15	aeE (up to 145 psi), aiH (from 145 psi)	-	-
Drape must (w/o. particles)						
Ice wine						
Wine lees	< 95	< 11	100	aeE (up to 145 psi), aiH (from 145 psi)	-	-
Wine yeast						
Mash (wine)	< 95	< 11	5	aeE (up to 145 psi), aiH (from 145 psi)	-	-

Application coffee/tea/cocoa

				Mechanical seal* material product side / atmospheric side			
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem	Encapsulated seal for vacuum application
Coffee	< 257	10	1	aeE	-	-	
Coffee extract	< 176–212	< 12	< 250	-	-	kiV/aeV	x
Tea	< 257	10	1	aeE	-	-	
Fruit tea / flavored tea	< 257	10	1	aeE	-	-	
Cocoa drink	< 104	12	< 10	aeE	-	-	

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kil: SiC/SiC/Viton (USP Class VI), kiV: SiC/SiC/Viton, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application milk

Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Mechanical seal* material product side / atmospheric side		
				Single	Quench	Tandem
Buttermilk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
UHT milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Yoghurt milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Kefir	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Cheese milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Skimmed milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Skimmed milk concentrate	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Milk concentrate	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Lactic culture	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Milk mix	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Whey	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Raw milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Pre-stirred yoghurt	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Sour milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem
Sour cream with thickening agents	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Full cream milk	< 131	< 11	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	> 131 – < 212	< 11	< 5	–	aeE/WDR (up to 145 psi), aiH/WDR (from 145 psi)	aeE/aeE (up to 145 psi), aiH/aeE (from 145 psi)
Coffee cream	< 131	< 11	< 40	aeV (up to 145 psi), ail (from 145 psi)	–	–
	> 131 – < 212	< 11	< 20	–	aeV/WDR (up to 145 psi), ail/WDR (from 145 psi)	aeV/aeV (up to 145 psi), ail/aeV (from 145 psi)
Whipping cream	< 131	< 11	< 40	aeV (up to 145 psi), ail (from 145 psi)	–	–
	> 131 – < 212	< 11	< 20	–	aeV/WDR (up to 145 psi), ail/WDR (from 145 psi)	aeV/aeV (up to 145 psi), ail/aeV (from 145 psi)
Sour cream	< 131	< 11	< 40	aeV (up to 145 psi), ail (from 145 psi)	–	–
	> 131 – < 212	< 11	< 20	–	aeV/WDR (up to 145 psi), ail/WDR (from 145 psi)	aeV/aeV (up to 145 psi), ail/aeV (from 145 psi)
Cream	< 131	< 11	< 40	aeV (up to 145 psi), ail (from 145 psi)	–	–
	> 131 – < 212	< 11	< 20	–	aeV/WDR (up to 145 psi), ail/WDR (from 145 psi)	aeV/aeV (up to 145 psi), ail/aeV (from 145 psi)
Condensed milk	< 131	< 11	< 40	aeV (up to 145 psi), ail (from 145 psi)	–	–
	> 131 – < 212	< 11	< 20	–	aeV/WDR (up to 145 psi), ail/WDR (from 145 psi)	aeV/aeV (up to 145 psi), ail/aeV (from 145 psi)

Application vinegar/sauces/marinade

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem
Soy sauce	41–203	13	25	kiE	–	–
	203–257	13	25	–	kiE/WDR	kiE/aeE
Cider vinegar						
Herb-flavoured vinegar						
Vinegar	140	10	1	aeE	–	–
Wine vinegar						
Vinegar essence	140	11	1	aeV	–	–

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SIC/EPDM (USP-Class VI), ail: carbon/SIC/Viton (USP-Class VI), kiE: SIC/SIC/EPDM, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application non-alcoholic drink

Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Mechanical seal* material product side / atmospheric side			
				Single	Quench	Tandem	Encapsulated seal
Apple juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Apricot/mango juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Cherry juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Cola	< 212	10	< 5	aeE	-	-	
	< 212	10	< 5	aeE	-	-	
Concentrated lemon juice, without pulp and granules	< 158	10	25	kiV	-	-	
Cranberry juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Fruit juice, with granules	< 158	10	< 50	kiE	-	-	x
Fruit juice, with pulp		10	< 50	aeE	-	-	x
Fruit juice, with pulp and with granules	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Fruit juice, without pulp	< 158	10	< 50	aeE	-	-	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
Grape juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Iced tea	< 212	10	< 5	aeE	-	-	
Lemon juice, with pulp and granules	< 158	10	25	kiV	-	-	x
Lemon juice, without pulp and granules	< 158	10	25	aeV	-	-	
Lemonade	< 212	10	< 5	aeE	-	-	
	< 212	10	< 5	aeE	-	-	
Mineral water	< 212	10	< 5	aeE	-	-	
	< 212	10	< 5	aeE	-	-	
Multivitamin juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Orange juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x
Peach/passion fruit juice	< 158	10	< 50	aeE	-	-	
	< 158	10	< 50	aeE	-	-	x
	< 158	10	< 50	kiE	-	-	x
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	-	kiE/WDR	kiE/aeE	x

				Mechanical seal* material product side / atmospheric side			
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Single	Quench	Tandem	Encapsulated seal
Raspberry/strawberry juice	< 158	10	< 50	aeE	–	–	
	< 158	10	< 50	aeE	–	–	x
	< 158	10	< 50	kiE	–	–	x
	> 158 – < 203	10	< 10	–	kiE/WDR	kiE/aeE	
	> 158 – < 203	10	< 10	–	kiE/WDR	kiE/aeE	x
Vegetable juice, with pulp and granules	< 158	11	< 50	kiV	–	–	x
	> 158 – < 203	11	< 10	–	–	kiV/aeV	x
Vegetable juice, without pulp and granules	< 158	11	< 50	aeV	–	–	
	> 158 – < 203	11	< 10	–	–	kiV/aeV	

Application concentrated fruit juice

					Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Concentration [Brix]	Single	Quench	Tandem
Concentrated fruit juice	41–194	12	related to temperature	to 25°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	41–104	12		26–49°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	12		26–49°	–	aeE/WDR	aeE/aeE
	59–104	12		50°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	12		50°	–	aeE/WDR	aeE/aeE
	59–104	13		55°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	13		55°	–	aeE/WDR	aeE/aeE
	59–104	13		60°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	13		60°	–	aeE/WDR	aeE/aeE
	59–104	13		65°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	13		65°	–	aeE/WDR	aeE/aeE
	68–104	14		70°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	14		70°	–	aeE/WDR	aeE/aeE

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kiV: SiC/SiC/Viton, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application oil

Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Mechanical seal* material product side / atmospheric side		
				Single	Quench	Tandem
Cocoa butter	50–86	9	< 80	aeV	–	–
Coconut oil / copra oil						
Corn oil						
Cotton seed oil						
Linseed oil						
Olive oil						
Palm oil						
Peanut oil						
Pumpkin seed oil						
Rape oil / rapeseed oil						
Safflower oil						
Sesame oil						
Soy oil / soy bean oil						
Sunflower oil						
Walnut oil						
Wheat germ oil						
Chip fat	< 338	9	10		–	–
Butter oil (liquid)	> 113–248	9	45	aeV	–	–
Lard (liquid)	> 113–248	9	45	aeV	–	–
Liquid butter	> 95–248	9	45	aeV	–	–
Fish oil	50–257	10	< 100	aeV	–	–
Whale oil	50–257	10	< 100	aeV	–	–
Cod liver (cod-liver oil)	50–257	10	< 100	aeV	–	–
Mineral oil	50–212			aeV	–	–
Motor oil						
Petroleum						
Derv	50–212	9	< 15	aeV	–	–
Diesel oil						
Oil-in-water emulsion	32–212	10	< 50	aeV	–	–

Application spirits

Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Concentration [%]	Mechanical seal* material product side / atmospheric side		
					Single	Quench	Tandem
Spirits	104	10	< 5		aeE (up to 145 psi), aiH (from 145 psi)	–	–
	< 122	12	< 150		–	aeE/WDR	kiE/aeE
	< 212	12	< 100		–	aeE/WDR	kiE/aeE
	< 172	10	1	< 10	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	< 172	9	1	< 50	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	< 172	8	1	< 98	aeE (up to 145 psi), aiH (from 145 psi)	–	–

Application cleaning in place (CIP)

Subgroup	Temperature [°F]	Density [kg/m³]	Viscosity [mPas]	Concentration [%]	Mechanical seal* material product side / atmospheric side		
					Single	Quench	Tandem
CIP liquid (concentration approx. 5%)	< 212	11	< 5	< 5	aeE (up to 145 psi), aiH (from 145 psi)	–	–

Application sugar syrup

					Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [mPas]	Concentration [Brix]	Single	Quench	Tandem
Sugar syrup without crystals	41–194	12	related to temperature	to 25°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	41–104	12		26–49°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	12		26–49°	0	aeE/WDR	aeE/aeE
	59–104	12		50°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	12		50°	0	aeE/WDR	aeE/aeE
	59–104	13		55°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	13		55°	0	aeE/WDR	aeE/aeE
	59–104	13		60°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	13		60°	0	aeE/WDR	aeE/aeE
	59–104	13		65°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	13		65°	0	aeE/WDR	aeE/aeE
	68–104	14		70°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	14		70°	0	aeE/WDR	aeE/aeE
	68–104	14		72,7°	aeE (up to 145 psi), aiH (from 145 psi)	–	–
	104–194	14		72,7°	0	aeE/WDR	aeE/aeE
	41–194	12		to 25°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	41–104	12		26–49°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	104–194	12		26–49°	0	kiE/WDR	kiE/aeE
	59–104	12		50°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	104–194	12		50°	0	kiE/WDR	kiE/aeE
	59–104	13		55°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	104–194	13		55°	0	kiE/WDR	kiE/aeE
	59–104	13		60°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	104–194	13		60°	0	kiE/WDR	kiE/aeE
	59–104	13		65°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	104–194	13		65°	0	kiE/WDR	kiE/aeE
	68–104	14		70°	kiE (up to 145 psi), kiH (10 – 233 psi)	–	–
	104–194	14		70°	0	kiE/WDR	kiE/aeE


* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application chemicals

Subgroup	Temperature [°F]	Density [lb/gal]	Viscosity [CPS]	Concentration [%]	Mechanical seal* material product side / atmospheric side		
					Single	Quench	Tandem
Caustic soda (NaOH)	< 140	related to concentration		< 15	kiE	-	-
	< 140	related to concentration		> 15 - < 50	-	kiE/WDR	kiE/aeE
	> 140 - < 214	related to concentration		< 12	kiE	-	-
	> 140 - < 214	related to concentration		< 12 - < 50	-	kiE/WDR	kiE/aeE
Phosphoric acid (H3PO4)	< 104	1% = 10 5% = 10	< 5	< 15	kiV	-	-
	> 104 - < 185	10% = 11 20% = 11	< 5	< 15	-	kiV/WDR	kiV/aeV
	< 185	35% = 12 45% = 13	< 5	> 15 - < 45	-	-	kiV/aeV
Nitric acid (HNO ₃)	32-68	1% = 10	5	0-10	kiV	-	-
	68-104	5% = 10	5	0-10	-	kiV/WDR	kiV/aeV
	32-104	10% = 10	5	10.1-20	-	kiV/WDR	kiV/aeV
	104-185	20% = 11	5	0-20	-	-	kiV/aeV
	32-185	30% = 12 40% = 12	5	20.1-40	-	-	kiV/aeV
High test peroxide (H2O2) Hydrogen peroxide	< 194	< 11	2	2-3	aeV	-	-
	< 194	< 12	2	< 40	kiV	-	-
	< 194	< 13	2	< 60	kiV	-	-
	< 140	< 15	2	< 100	-	-	kiV/aeV
Brine solution Common salt solution Sodium chloride (NaCl)	< 86	< 11	< 5	< 5	aeE	-	-
	86-104	< 11	< 5	< 5	kiE	-	-
	< 104	< 11	< 5	5.1-10	kiE	-	-
	< 104	< 12	< 25	10.1-25	-	kiE/WDR	kiE/aeE
Curing brine (butchery)	< 104	12	< 300	< 20	kiE	-	-
Salting brine (cheese dairy)	< 104	13	< 60	20-30	-	kiE/WDR	kiE/aeE
Ammonia/ammoniac (NH ₃)	< 104	8	< 5		-	aeE/WDR	aeE/aeE
Caustic potash (KOH) Potassium hydroxide	< 140	< 11	< 5	< 10	kiE	-	-
	< 140	< 12	< 5	< 20	kiE	-	-
Glycerol Propanetriol	80	< 11	< 5	0-40	aeV	-	-
	80	< 12	< 20	40.1-60	aeV	-	-
	80	< 12	< 50	60.1-75	aeV	-	-
	80	< 12	< 100	75.1-85	aeV	-	-
Propylene-glycol (C3H8O2)	32-176	10	< 5	1-20	kiV	-	-
	23-176	10	< 20	20.1-50	kiV	-	-
	14-176	10	< 150	50.1-75	kiV	-	-
	14-0	11	< 255	75.1-100	kiV	-	-
	32-176	11	< 150	75.1-100	kiV	-	-
Ethanediol Ethylene-glycol (C2H6O2)	32-176	10	< 5	1-20	kiE	-	-
	23-176	11	< 20	20.1-50	kiE	-	-
	14-176	11	< 40	50.1-75	kiE	-	-
	14-32	11	< 100	75.1-100	kiE	-	-
	32-176	11	< 65	75.1-100	kiE	-	-
Citric acid (C6H8O7) Natural citric acid	41-176	1% = 10 10% = 10	< 15	< 10	kiV	-	-
	41-176	10.1% = 10 20% = 11 30% = 11 50% = 13	< 15	10.1-50	kiV	-	-
Acetic acid (C2H4O2)	41-176	10	1	< 10	aeE	-	-
	41-212	11	1	10.1-100	-	-	aeK/aeE

* aeE: carbon/stainless steel/EPDM, aeK: carbon/stainless steel/FFKM, aeV: carbon/stainless steel/Viton, kiE: SIC/SIC/EPDM, kiV: SIC/SIC/Viton. The elastomer of the static seals equals the elastomer of the mechanical seals.



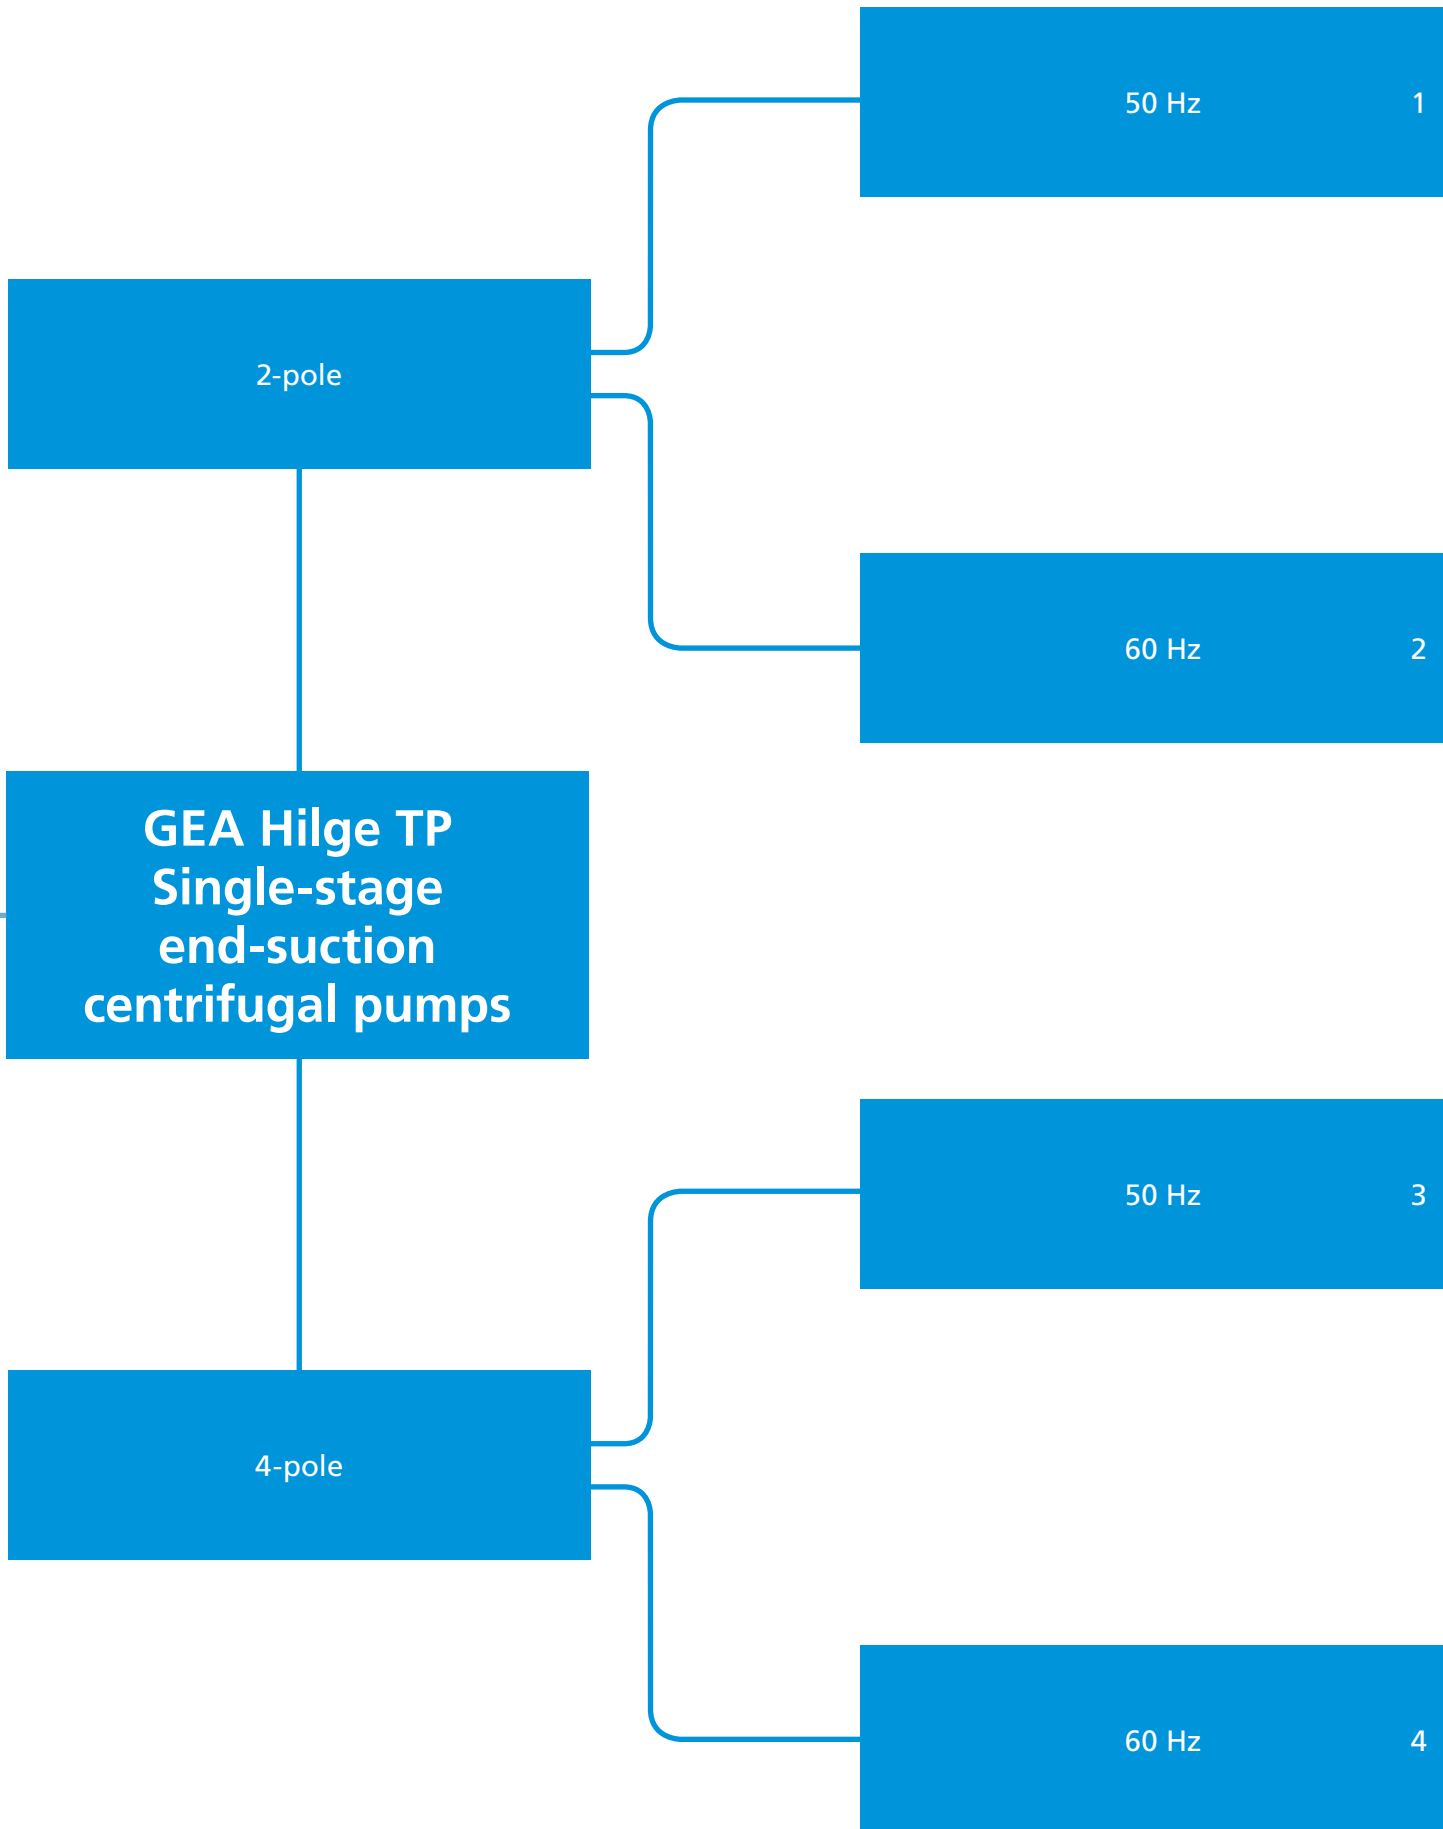



**GEA Hilge TP
2-pole
50 Hz**



GEA Hilge TP 1020

GEA Hilge TP 1540

GEA Hilge TP 2030

GEA Hilge TP 2050

GEA Hilge TP 2575

GEA Hilge TP 3050

GEA Hilge TP 5060

GEA Hilge TP 7060

GEA Hilge TP 8050

GEA Hilge TP 8080

GEA Hilge TP 16040




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2", pressure side 1½"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 20 m³/h (86 US gpm)
Pump head	Max. 24 m (77 ft)
Housing pressure	Max. 10 bar (145 psi)
Certificates	




Further options see page 150 (Composition of Order Code)

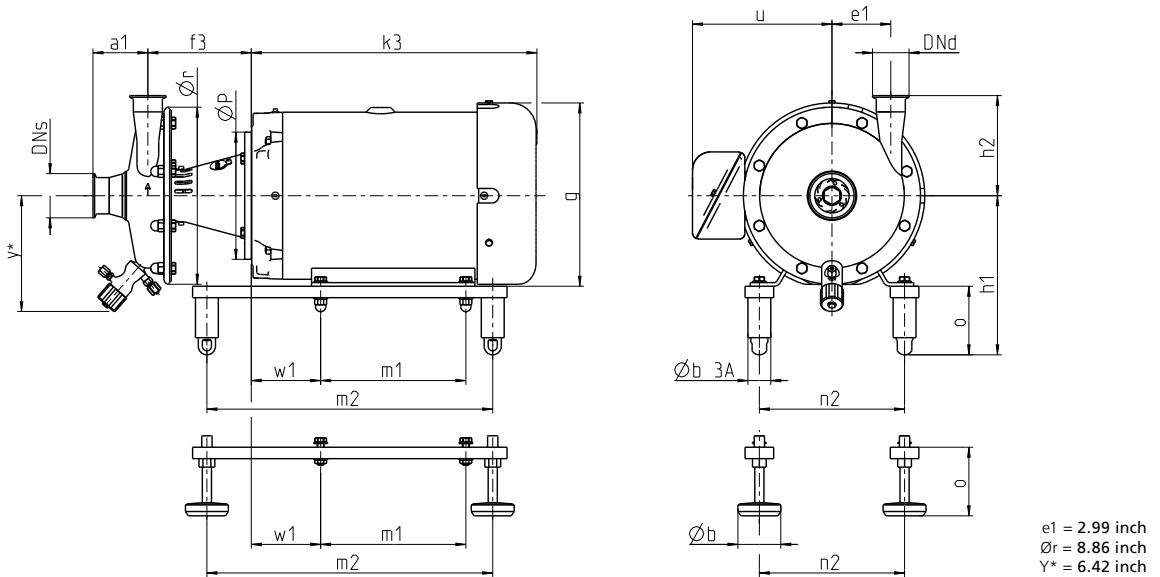

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	67.00
143TC	1.50	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	75.00
145TC	2.00	11.73	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	77.00
182TC	3.00	13.59	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	100.00
184TC	5.00	15.16	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	120.00
213TC	7.50	16.70	7.06	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	211.00



Connections										
DNs 2" OD DNd 1 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.43	2.12	2.34	2.30	3.81	3.20	2.10	2.31	3.46	
h2	5.82	5.26	5.64	5.68	7.14	6.00	5.48	5.70	6.85	

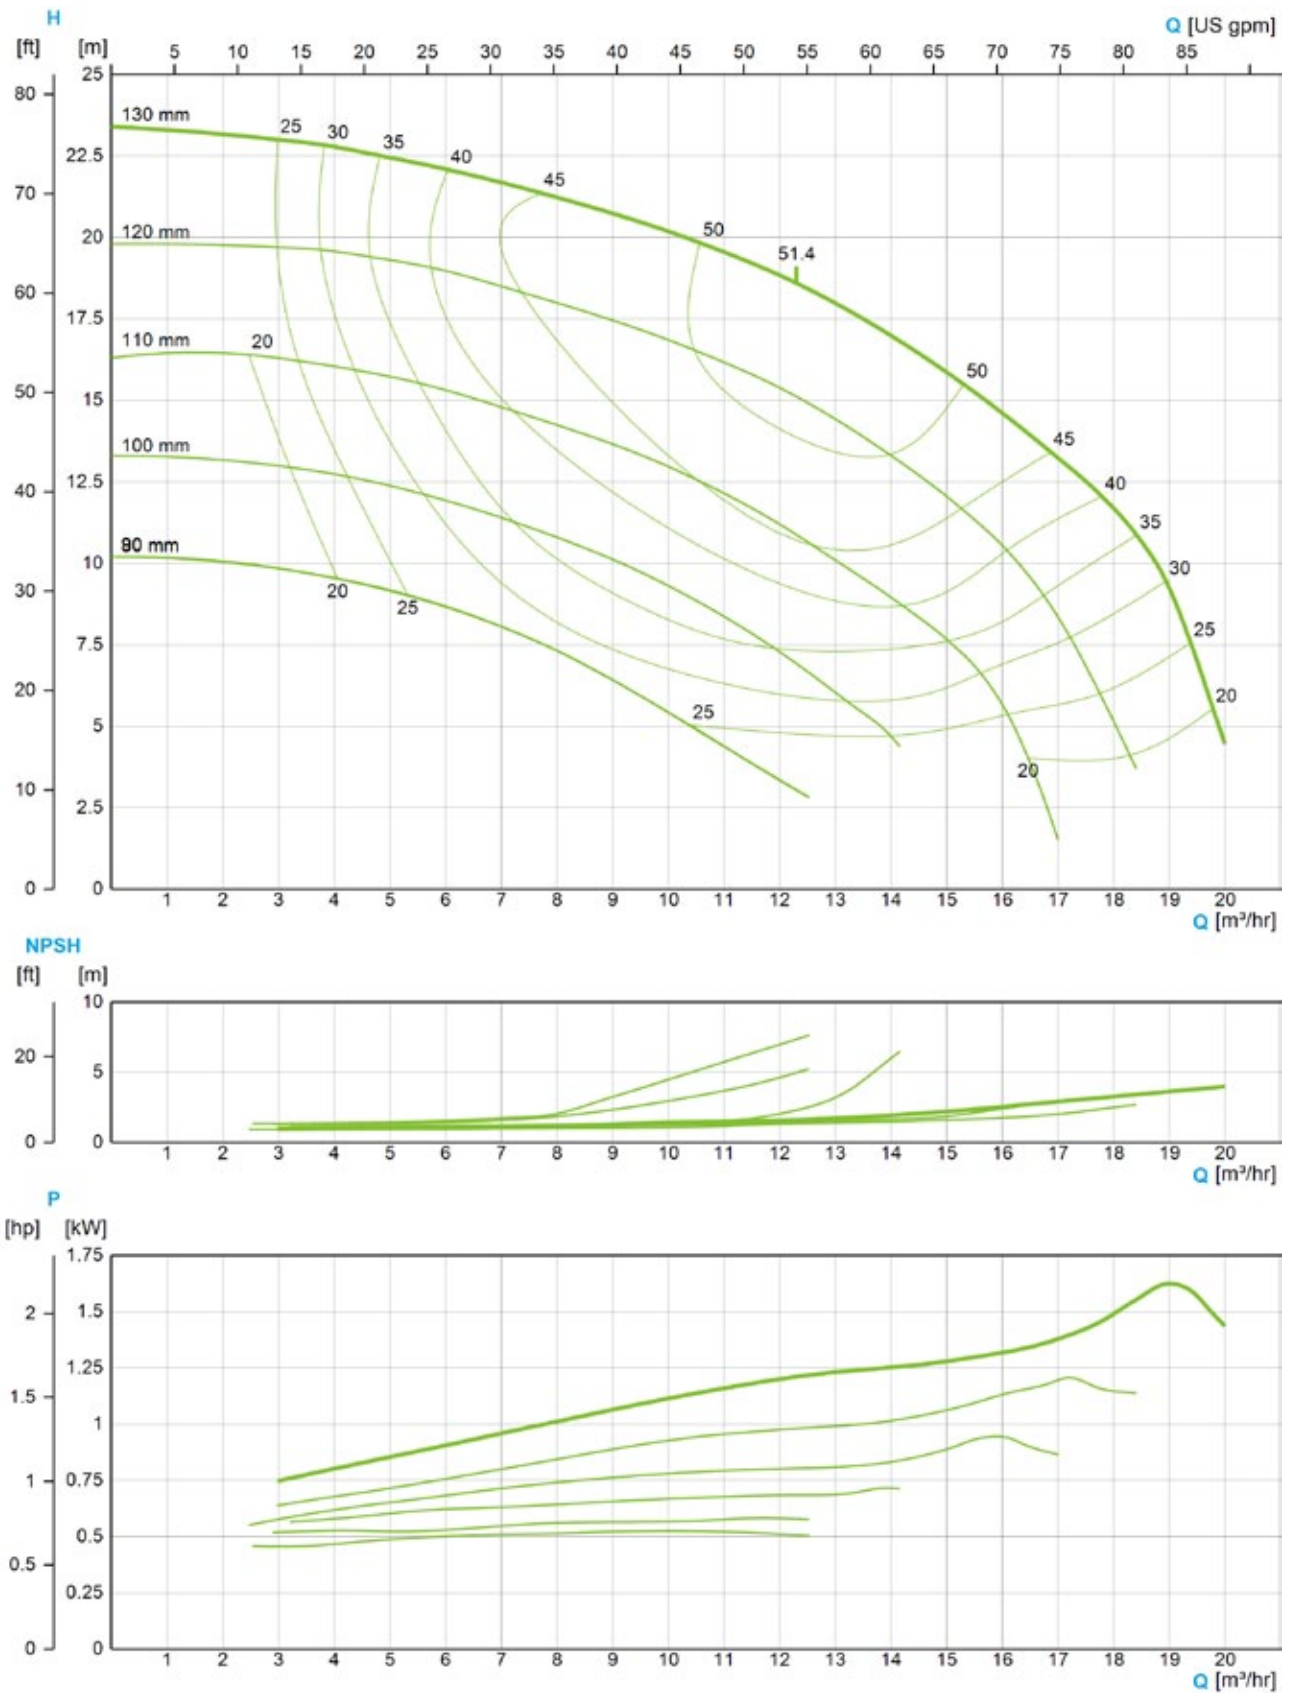Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging




The flow charts are based on water, temperature 59 °F



Technical data of the standard version	
Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2 1/2"; 3", pressure side 1 1/2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 35 m³/h (154 US gpm)
Pump head	Max. 42 m (138 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	 


Further options see page 150 (Composition of Order Code)

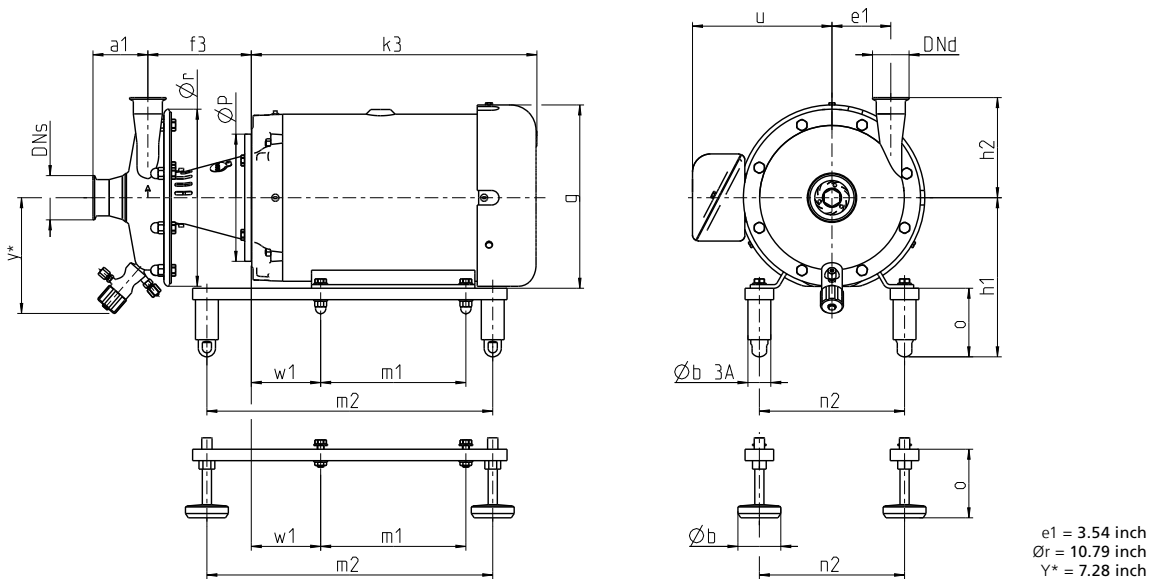

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	86.00
182TC	3.00	13.59	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	109.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	129.00
213TC	7.50	16.70	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	200.00
215TC	10.00	18.27	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	229.00
254TC	15.00	18.56	6.79	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	241.00

Connections										
DNs 3" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.67	2.49	2.77	2.53	4.30	3.12	2.49	2.68	3.70	
h2	6.24	5.68	6.06	6.10	7.56	6.42	5.91	6.12	7.27	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

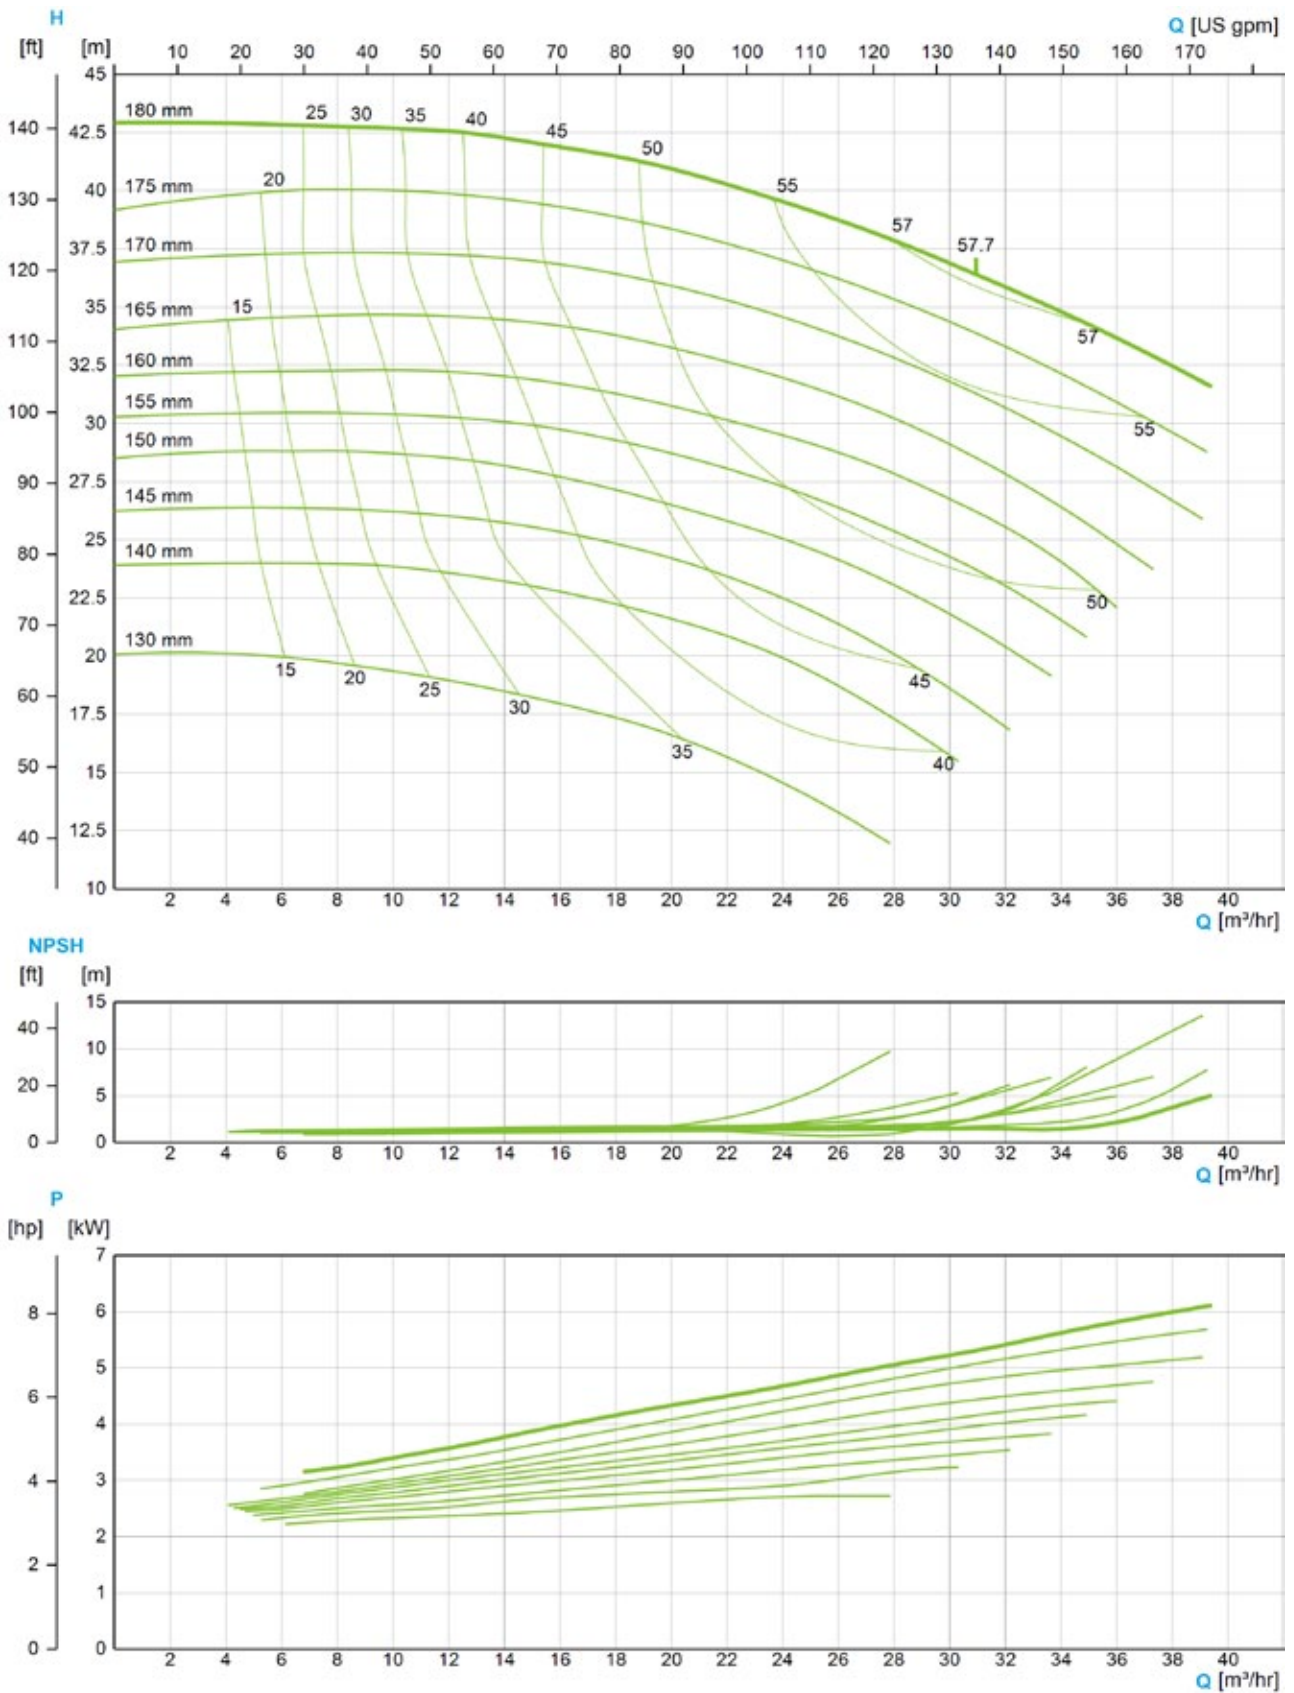

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2 1/2"; 3", pressure side 1 1/2"; 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 36 m³/h (158 US gpm)
Pump head	Max. 36 m (118 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	




Further options see page 150 (Composition of Order Code)

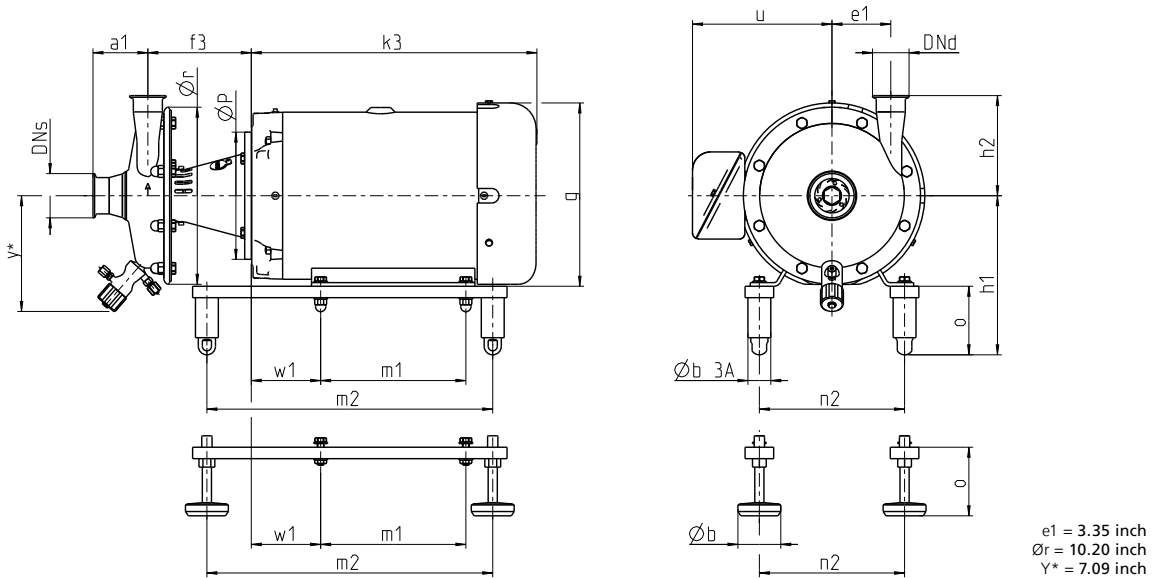

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	83.00
182TC	3.00	13.59	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	106.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	123.00
213TC	7.50	16.70	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	177.00
215TC	10.00	18.27	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	206.00
254TC	15.00	18.56	6.80	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	238.00

Connections										
DNS 2 1/2" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.55	2.37	2.59	2.41	4.18	3.00	2.37	2.56	3.58	
h2	6.05	5.49	5.87	5.91	7.37	6.23	5.72	5.93	7.08	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

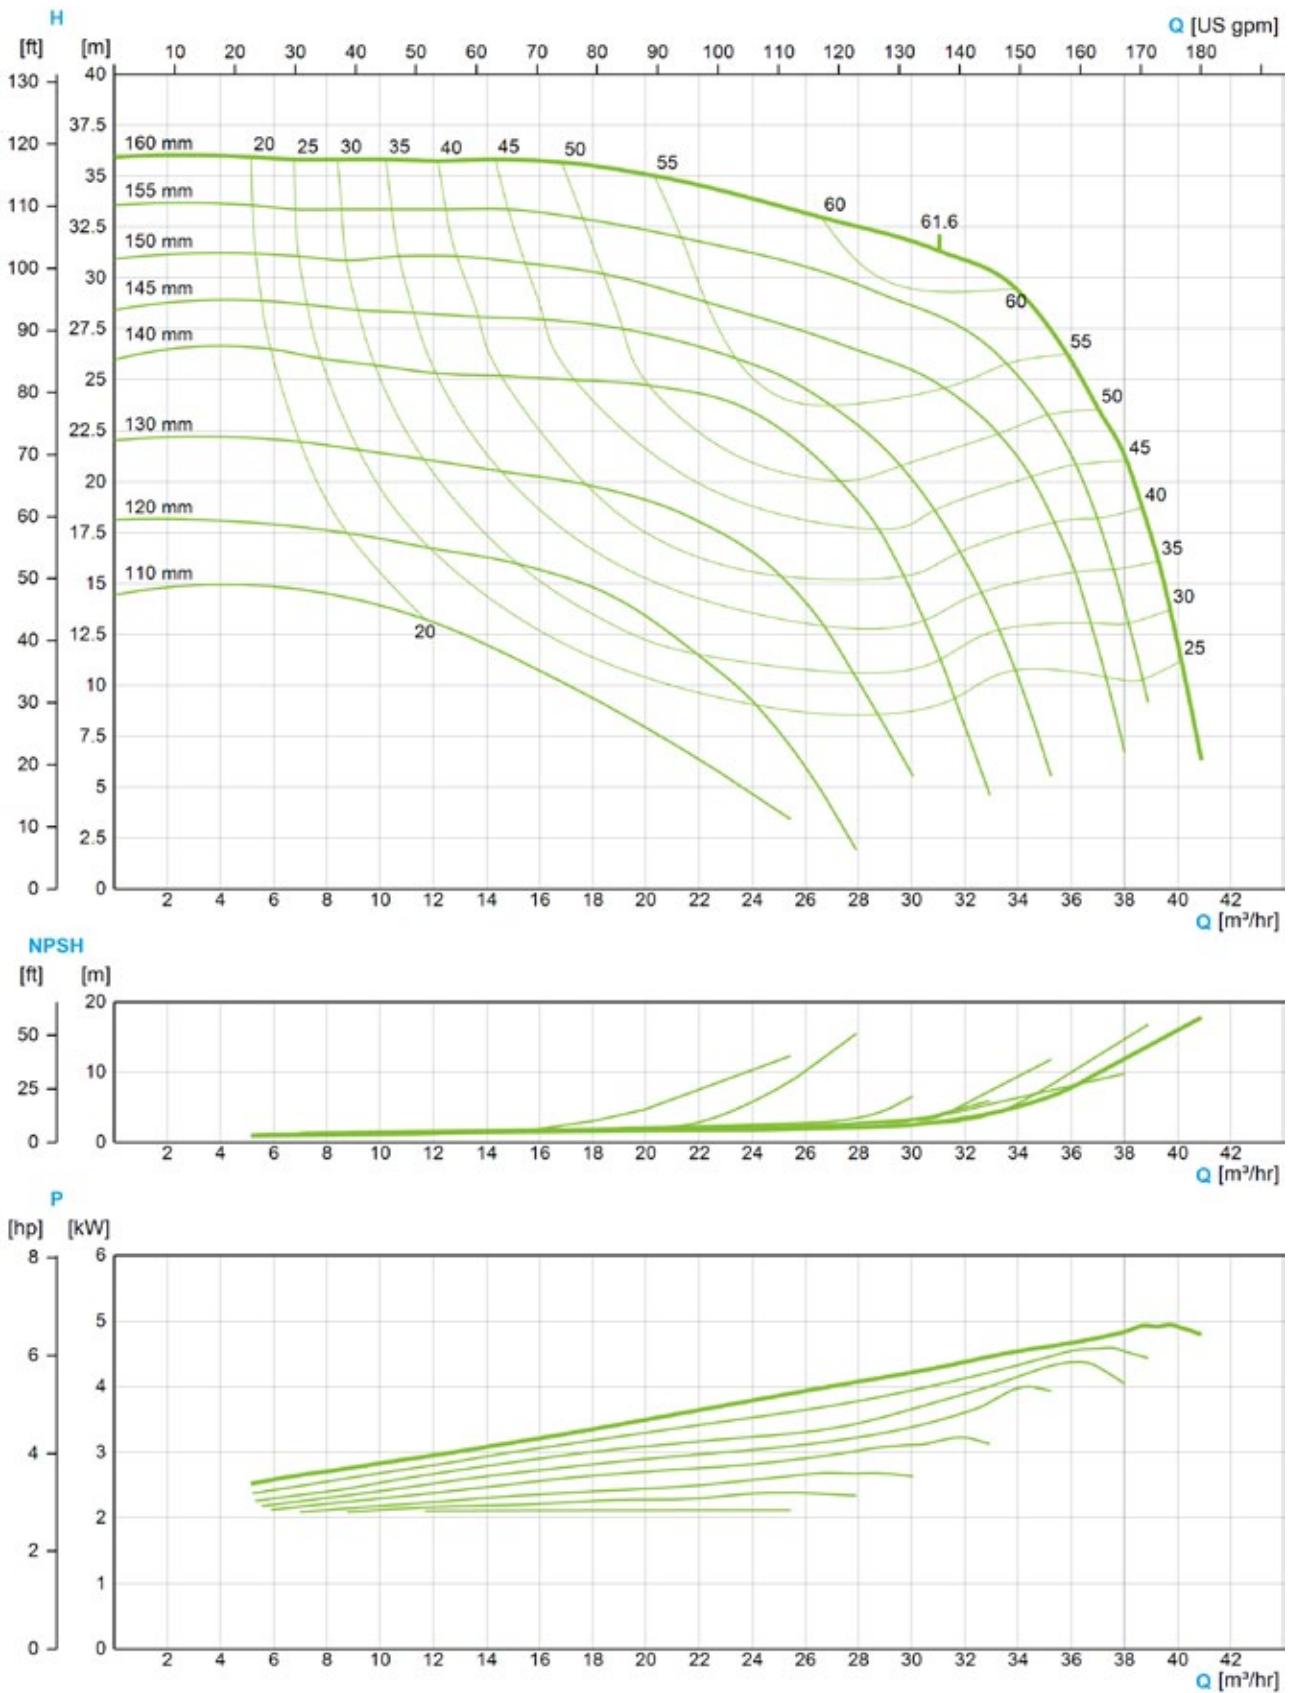

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2 1/2"; 3", pressure side 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 36 m³/h (158 US gpm)
Pump head	Max. 60 m (197 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

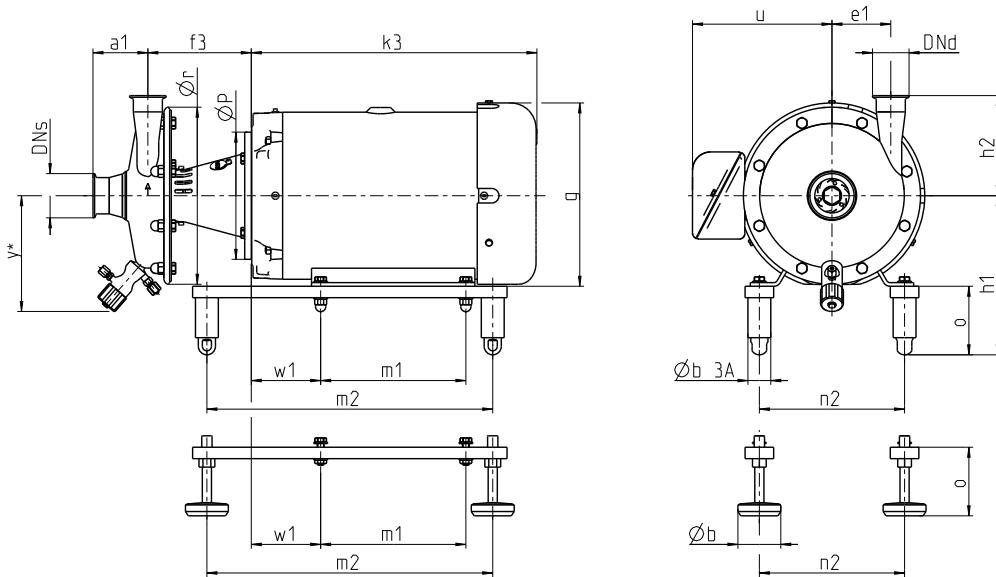

e1 = 4.21 inch
Ør = 12.17 inch
Y* = 7.95 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.37	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	134.00
213TC	7.50	16.70	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	188.00
215TC	10.00	18.27	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	217.00
254TC	15.00	18.56	6.98	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	245.00
256TC	20.00	19.35	6.98	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	286.00


Connections

DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.94	2.75	3.03	2.80	4.56	3.39	2.76	2.94	3.96
h2	7.19	6.87	7.09	7.05	8.56	7.44	6.85	7.19	8.21

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

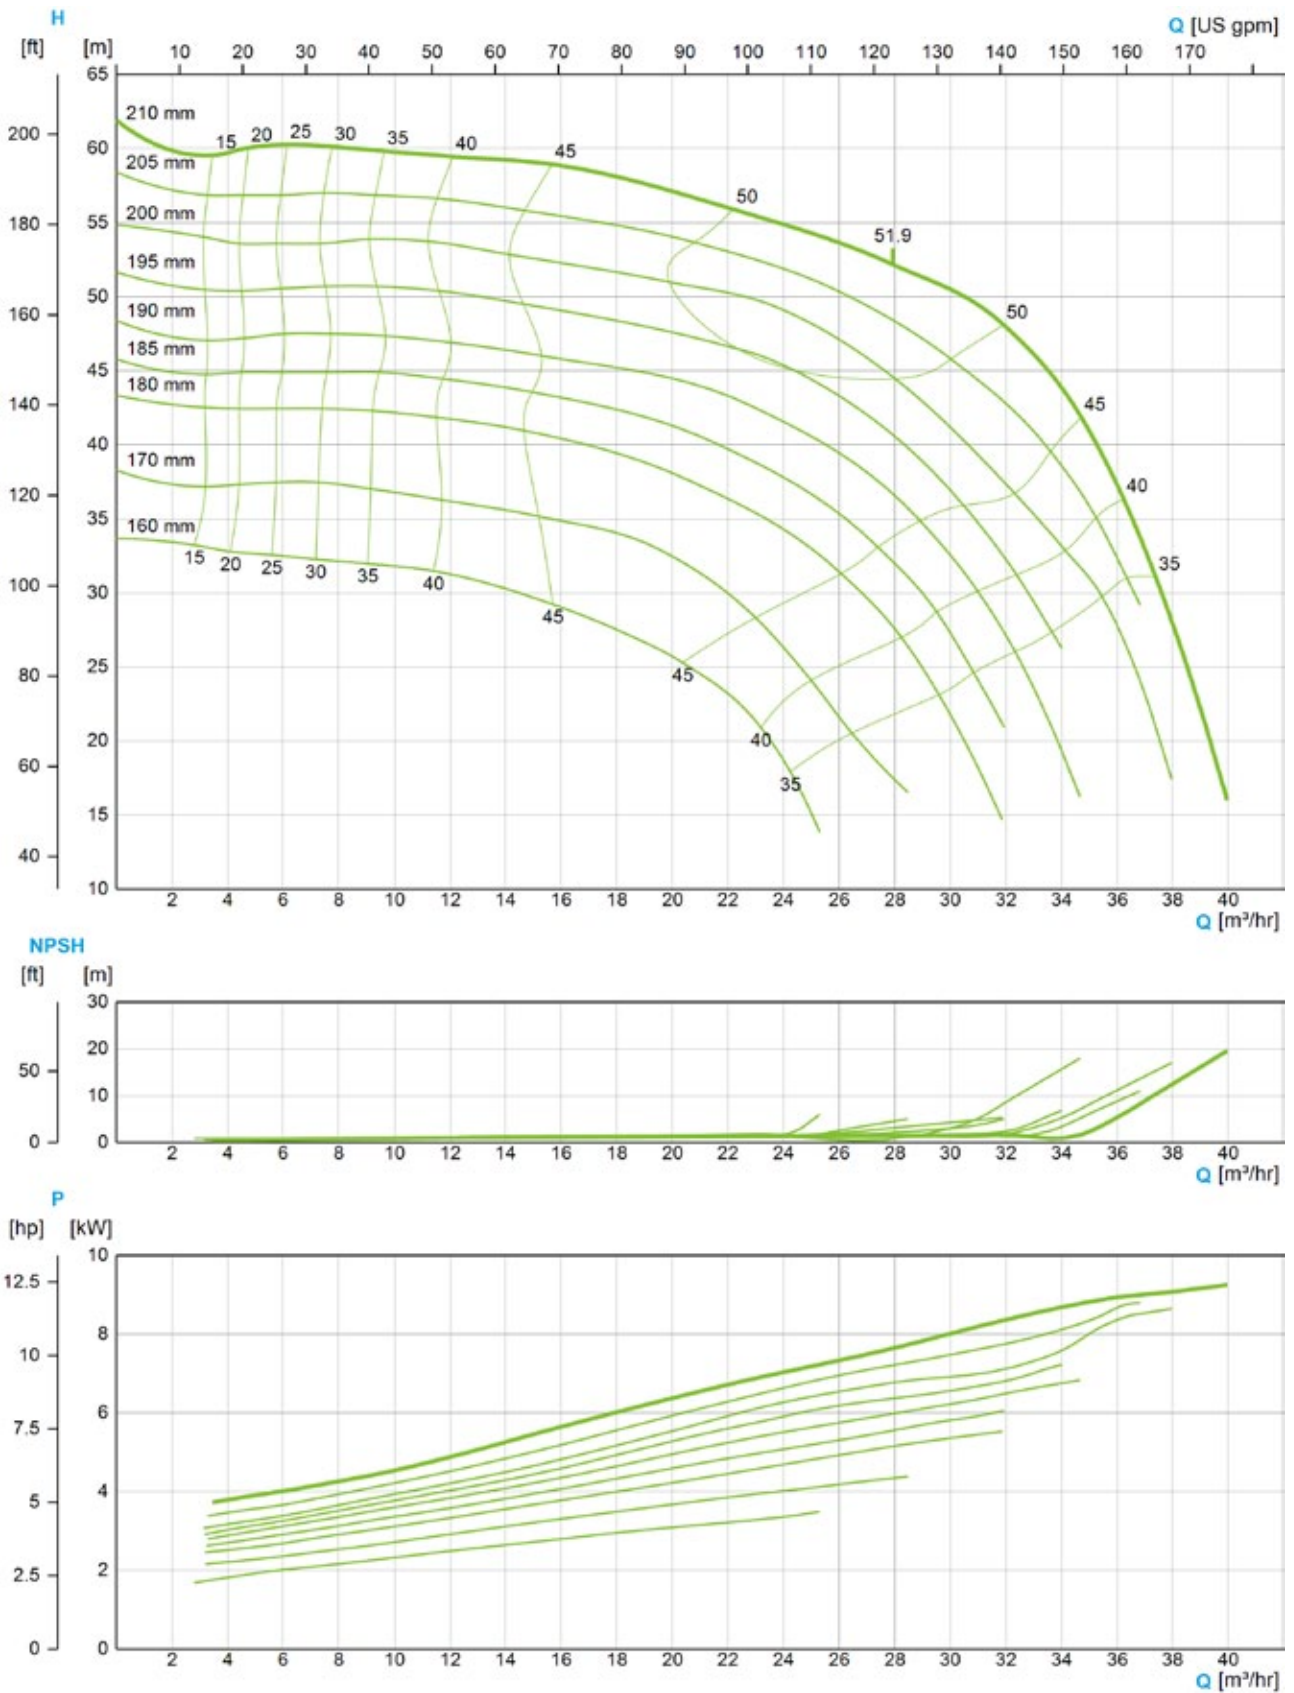

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", pressure side 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 40 m³/h (176 US gpm)
Pump head	Max. 85 m (279 ft)
Housing pressure	Max. 16 bar (232 psi)



Further options see page 150 (Composition of Order Code)

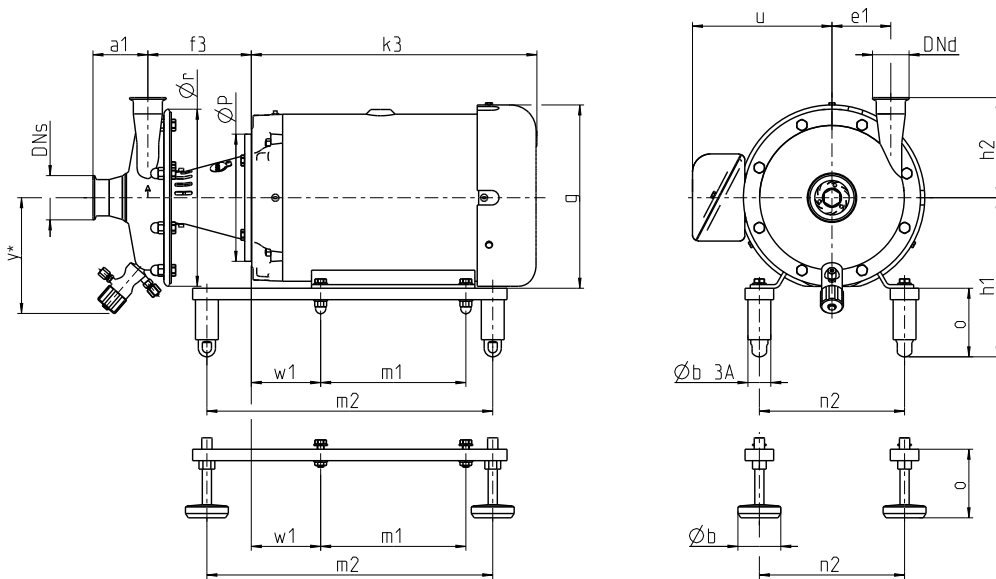

e1 = 4.90 inch
Ør = 13.54 inch
Y* = 8.27 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
213TC	7.50	16.70	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	189.00
215TC	10.00	18.27	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	218.00
254TC	15.00	18.56	7.05	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	253.00
256TC	20.00	19.35	7.05	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	305.00
284TSC	25.00	23.31	6.35	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	408.00
286TSC	30.00	23.31	6.35	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	517.00
324TSC	40.00	25.87	6.83	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	673.00


Connections

DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.89	2.71	2.99	2.76	4.52	3.35	2.72	2.90	3.92
h2	8.24	7.93	8.15	8.11	9.62	8.50	7.91	8.25	9.27

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

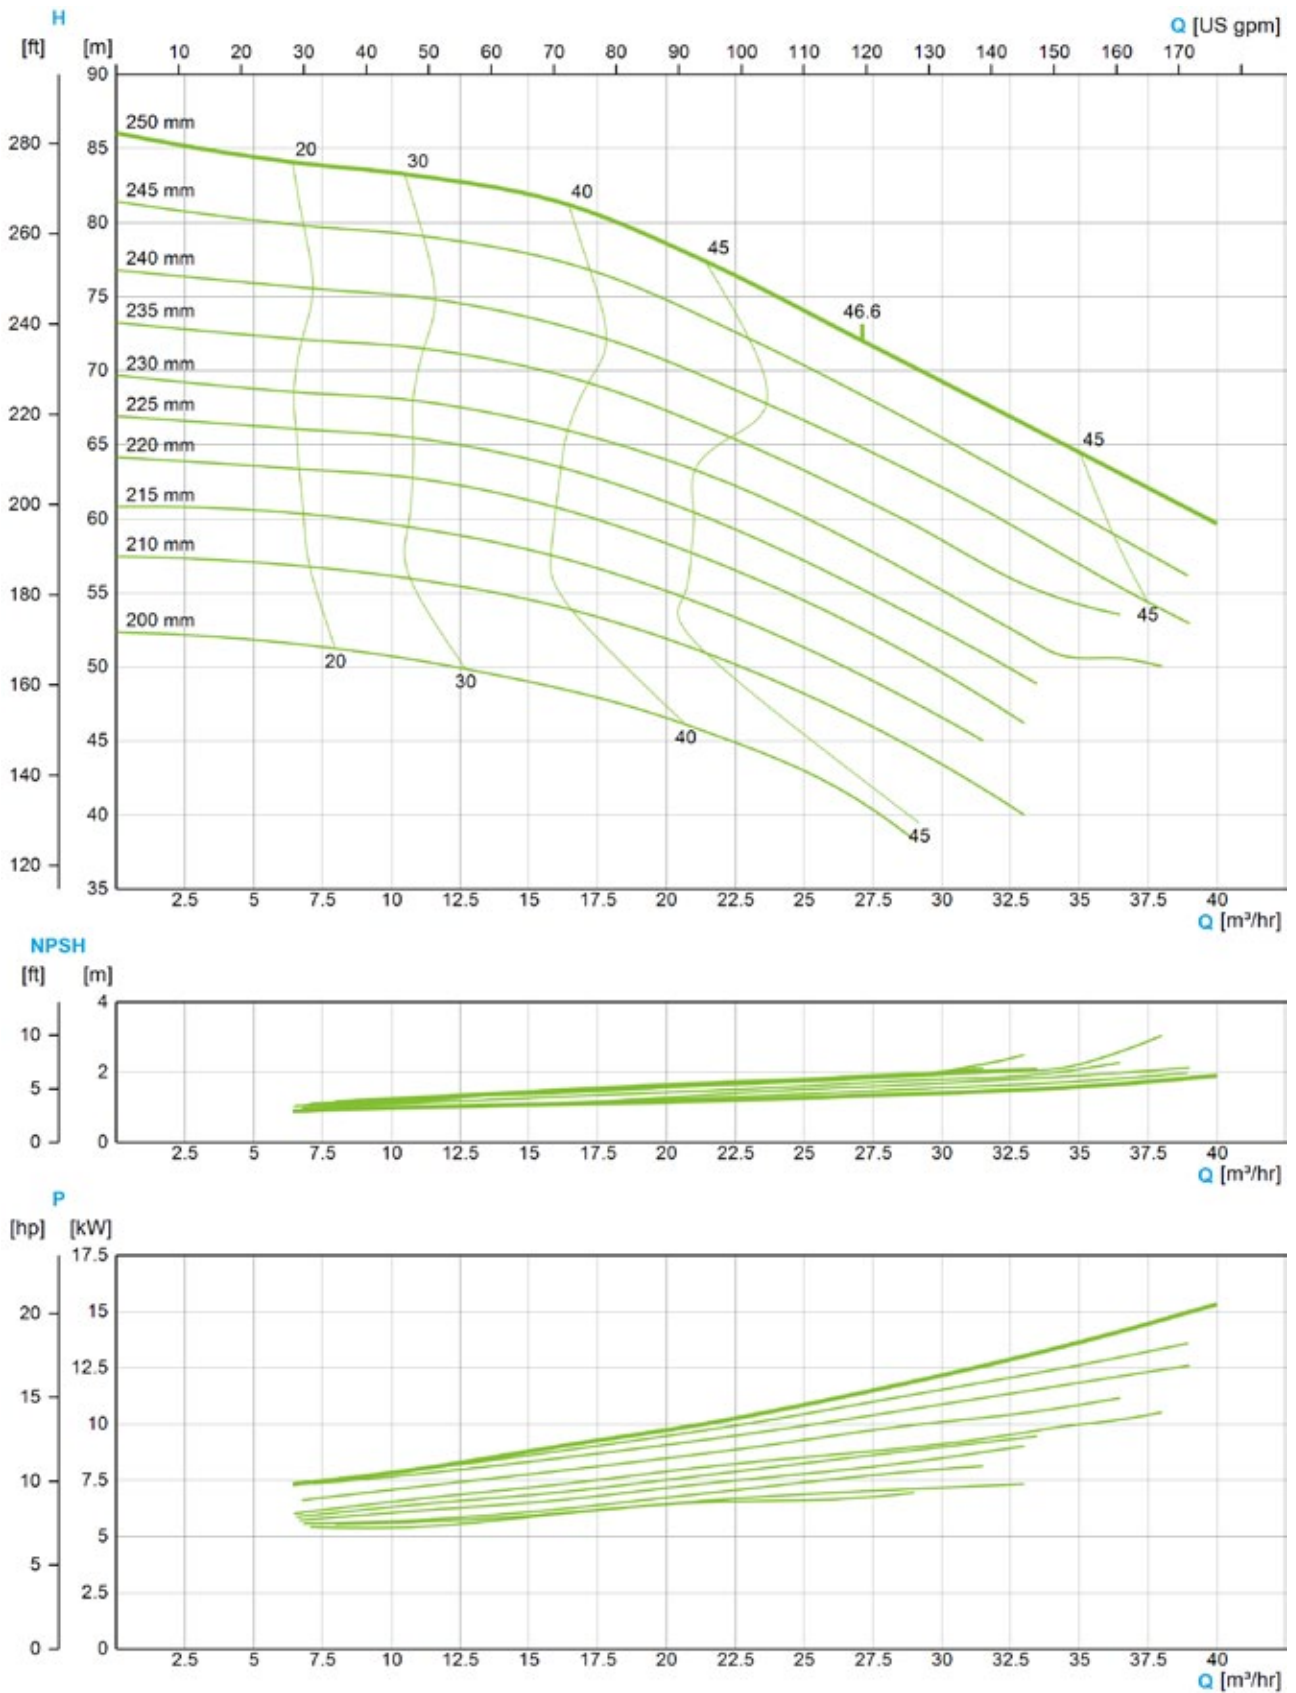

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2½"; 3", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 75 m³/h (330 US gpm)
Pump head	Max. 65 m (213 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

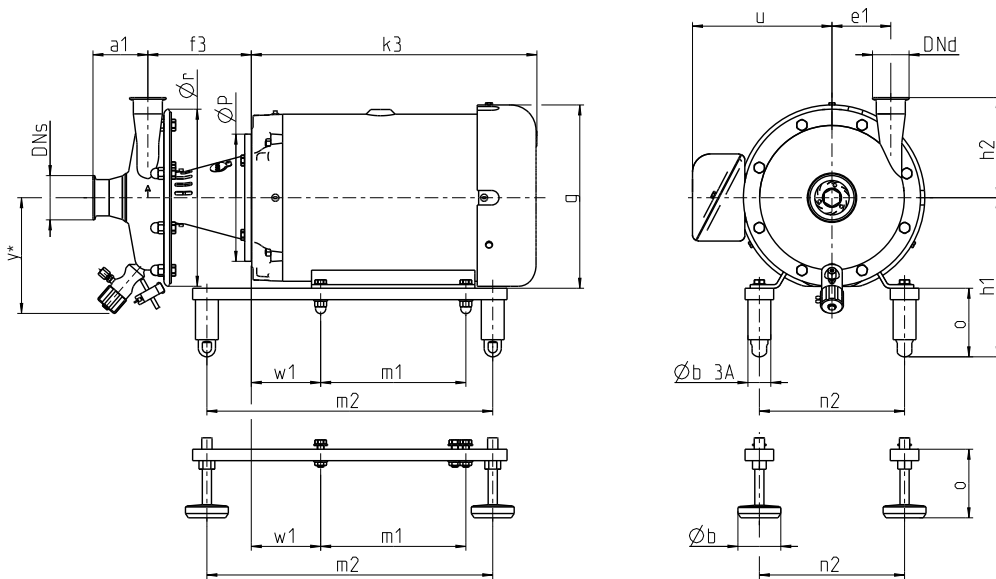

e1 = 4.06 inch
Ør = 12.17 inch
Y* = 7.95 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.29	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	137.00
213TC	7.50	16.70	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	191.00
215TC	10.00	18.27	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	220.00
254TC	15.00	18.56	6.91	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	249.00
256TC	20.00	19.35	6.91	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	290.00
284TSC	25.00	23.31	6.21	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	441.00
286TSC	30.00	23.31	6.21	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	491.00


Connections

DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.87	2.69	2.97	2.74	4.50	3.33	2.70	2.88	3.90
h2	6.90	6.59	6.81	6.76	8.28	7.15	6.56	6.91	7.93

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

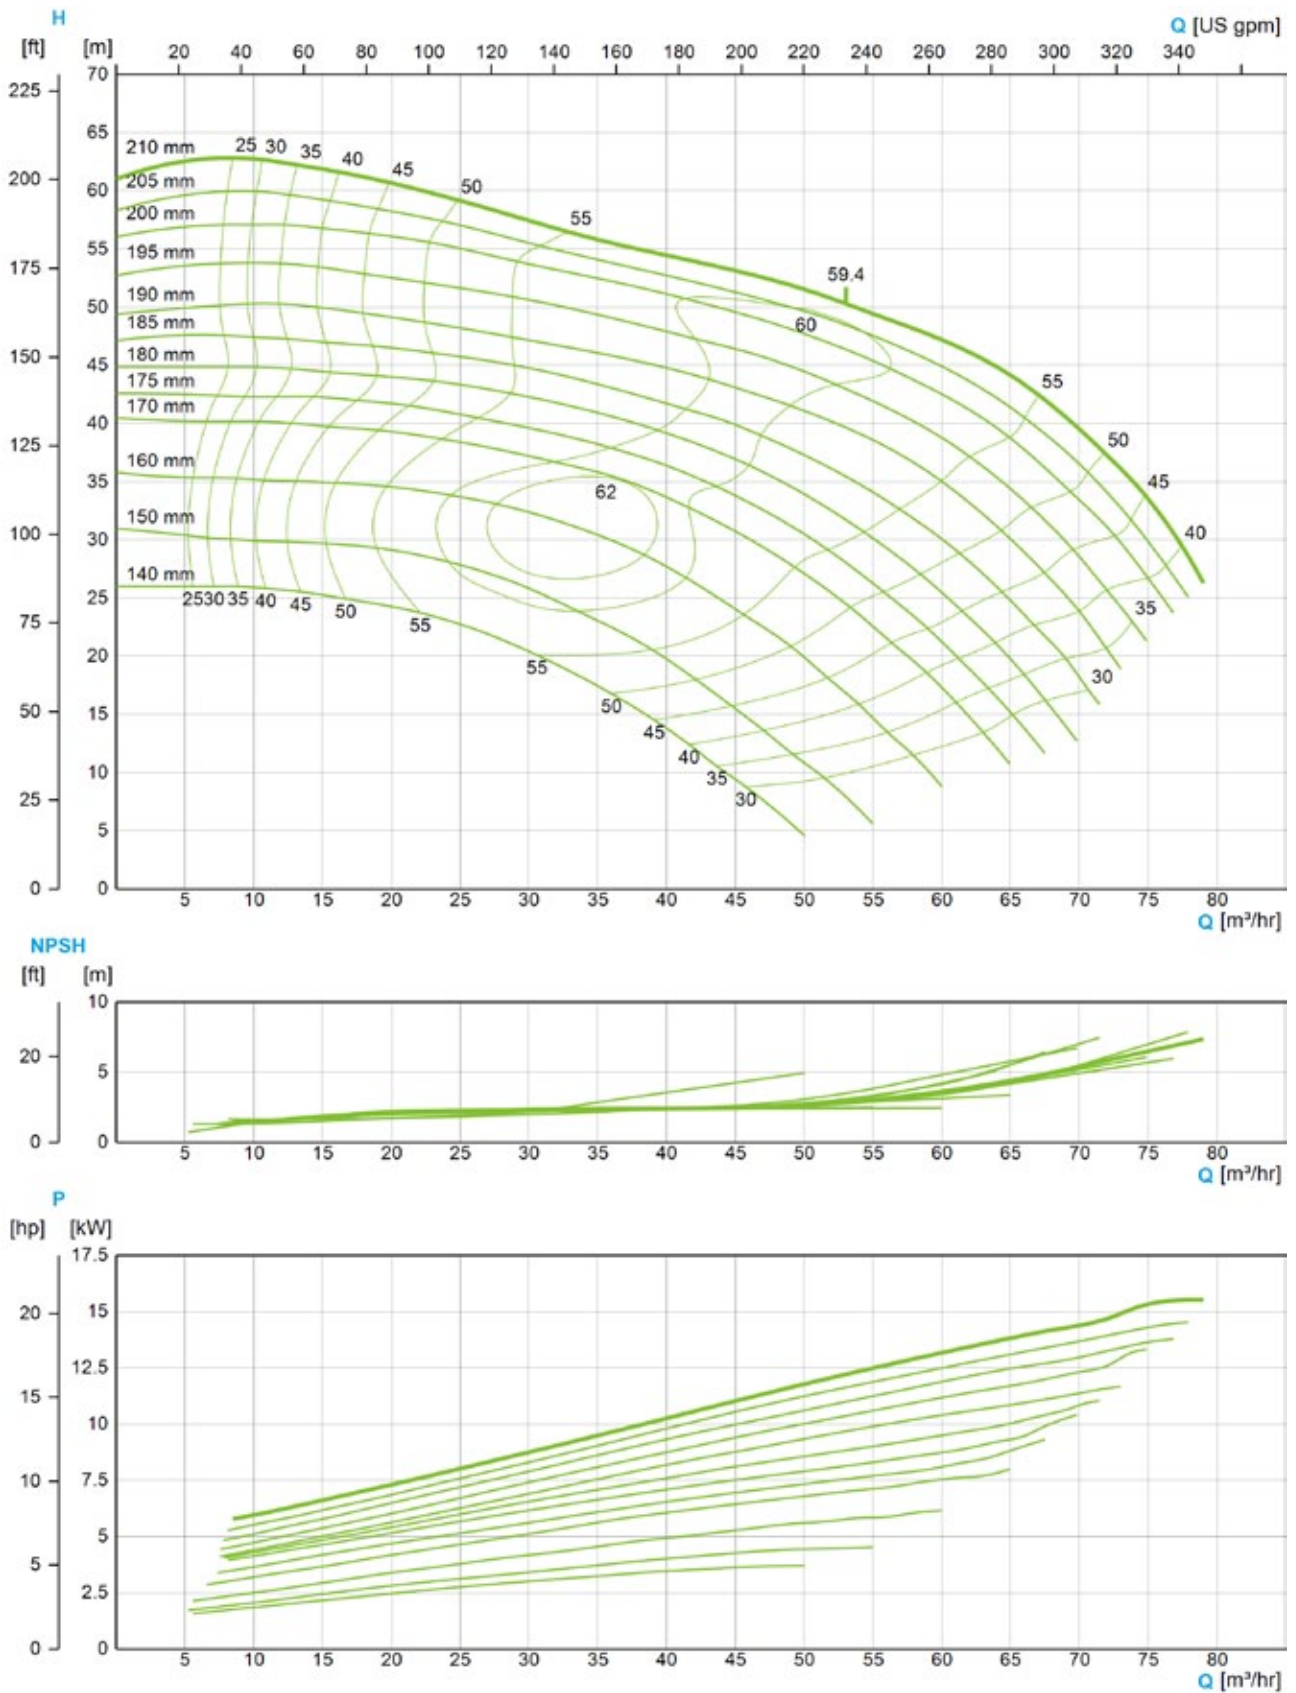

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 75 m³/h (330 US gpm)
Pump head	Max. 75 m (246 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

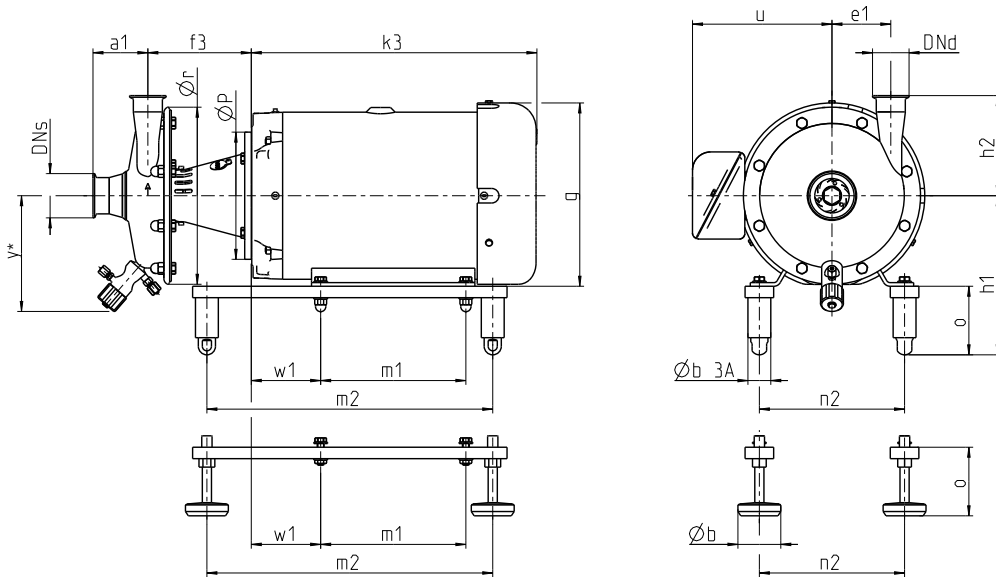

e1 = 4.51 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	140.00
213TC	7.50	16.70	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	194.00
215TC	10.00	18.27	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	223.00
254TC	15.00	18.56	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	257.00
256TC	20.00	19.35	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	310.00
284TSC	25.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	459.00
286TSC	30.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	490.00


Connections

DNs 3" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.30	9.11	9.33	9.16	10.92	9.75	9.12	9.30	10.32

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

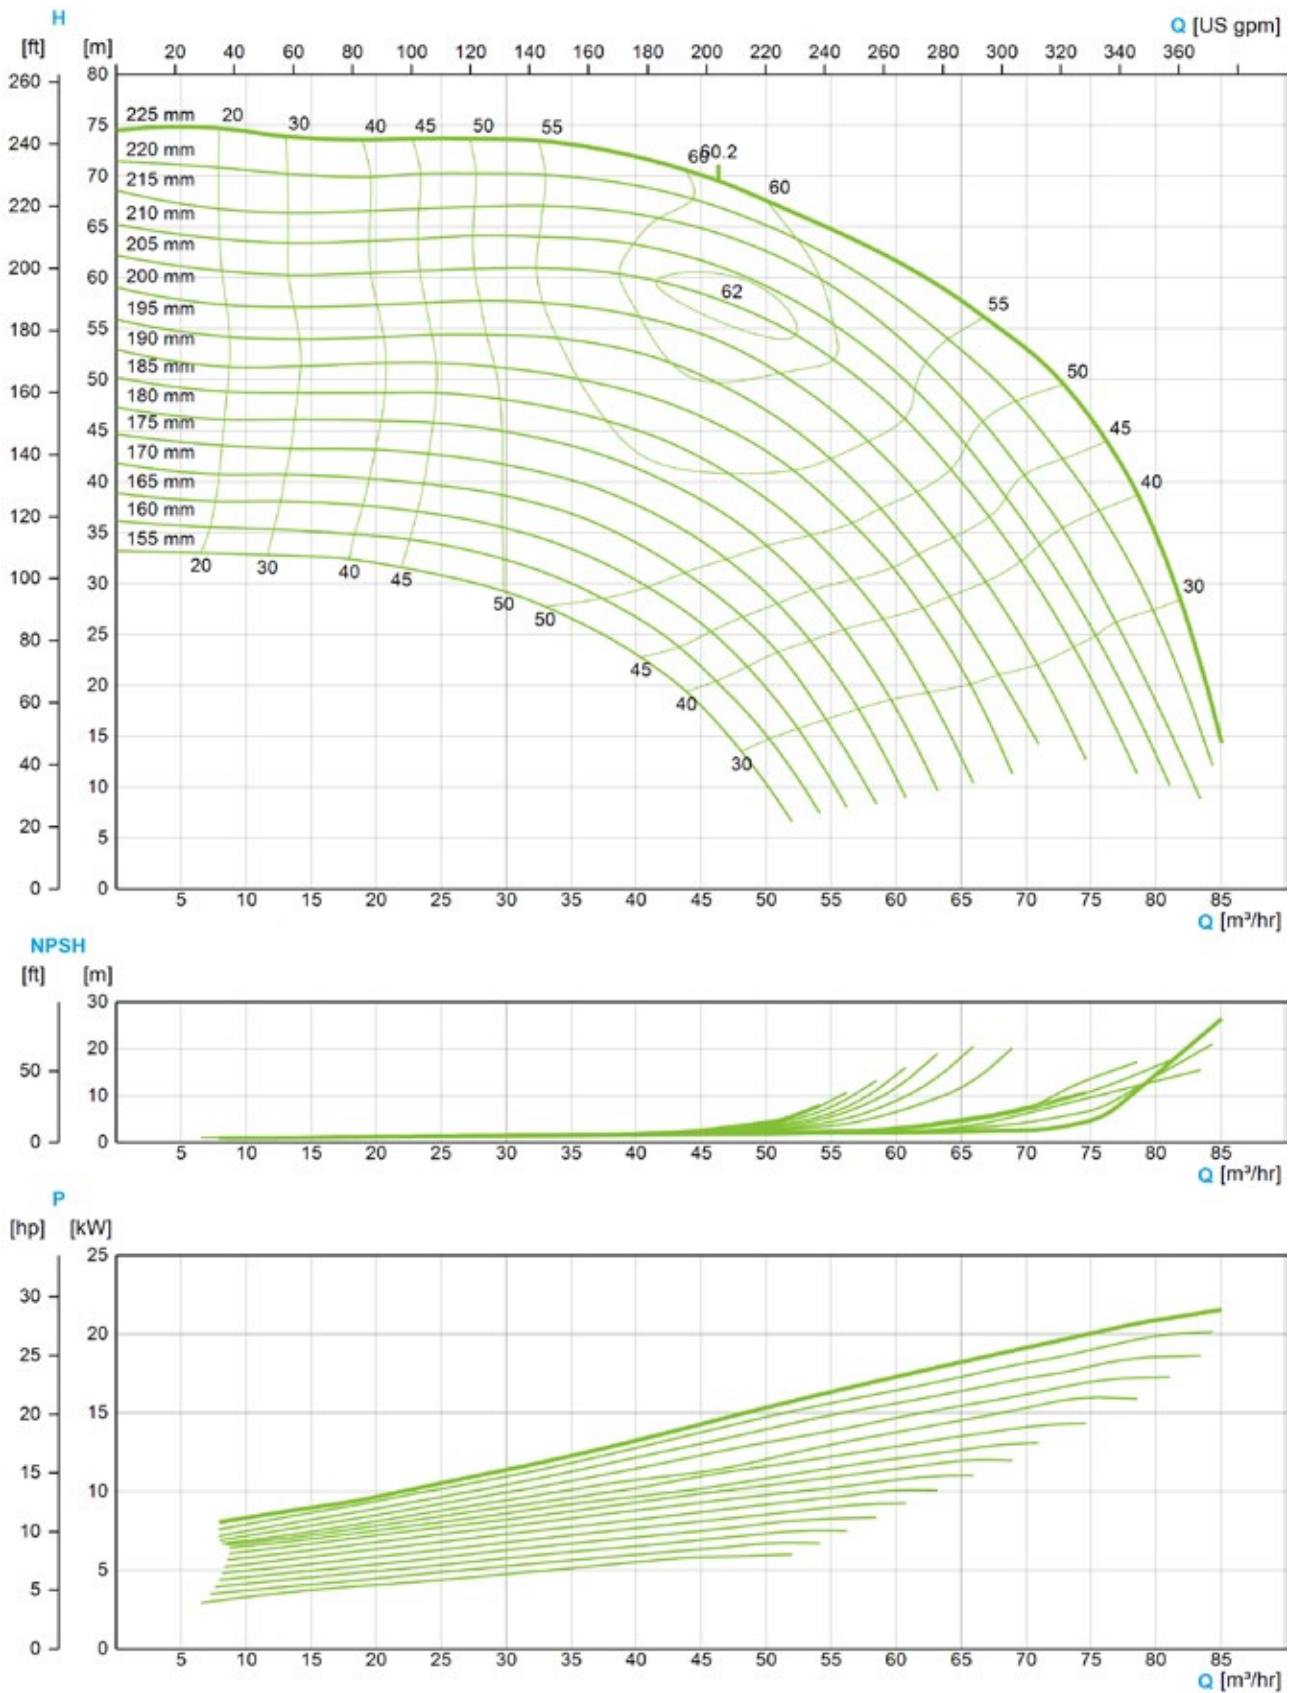

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2 1/2"; 3", pressure side 2"; 2 1/2"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 110 m³/h (484 US gpm)
Pump head	Max. 74 m (243 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

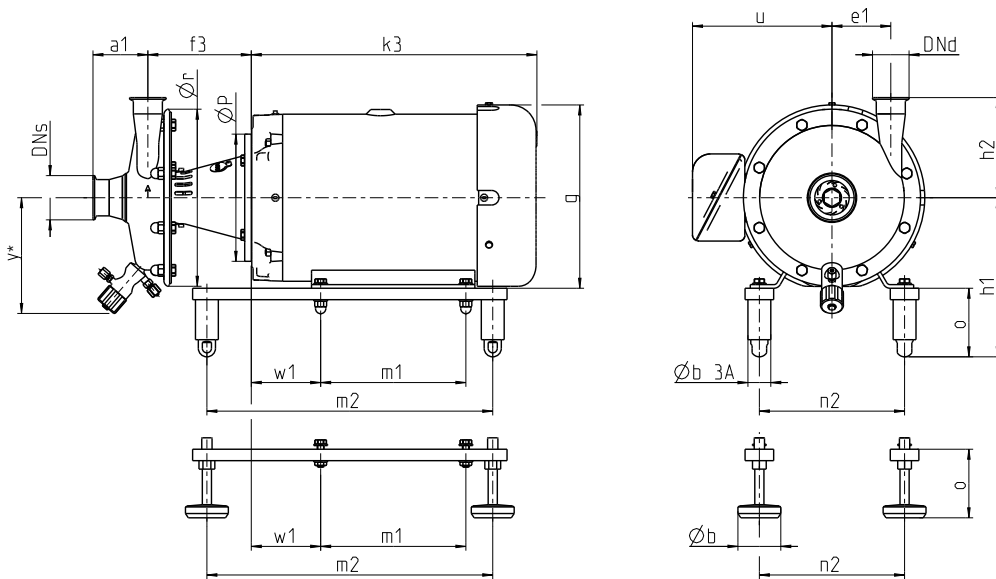

e1 = 4.33 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	140.00
213TC	7.50	16.70	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	194.00
215TC	10.00	18.27	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	223.00
254TC	15.00	18.56	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	257.00
256TC	20.00	19.35	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	310.00
284TSC	25.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	459.00
286TSC	30.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	490.00


Connections

DNs 3" OD DNd 2 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.08	8.90	9.12	8.94	10.71	9.53	8.90	9.09	10.11

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

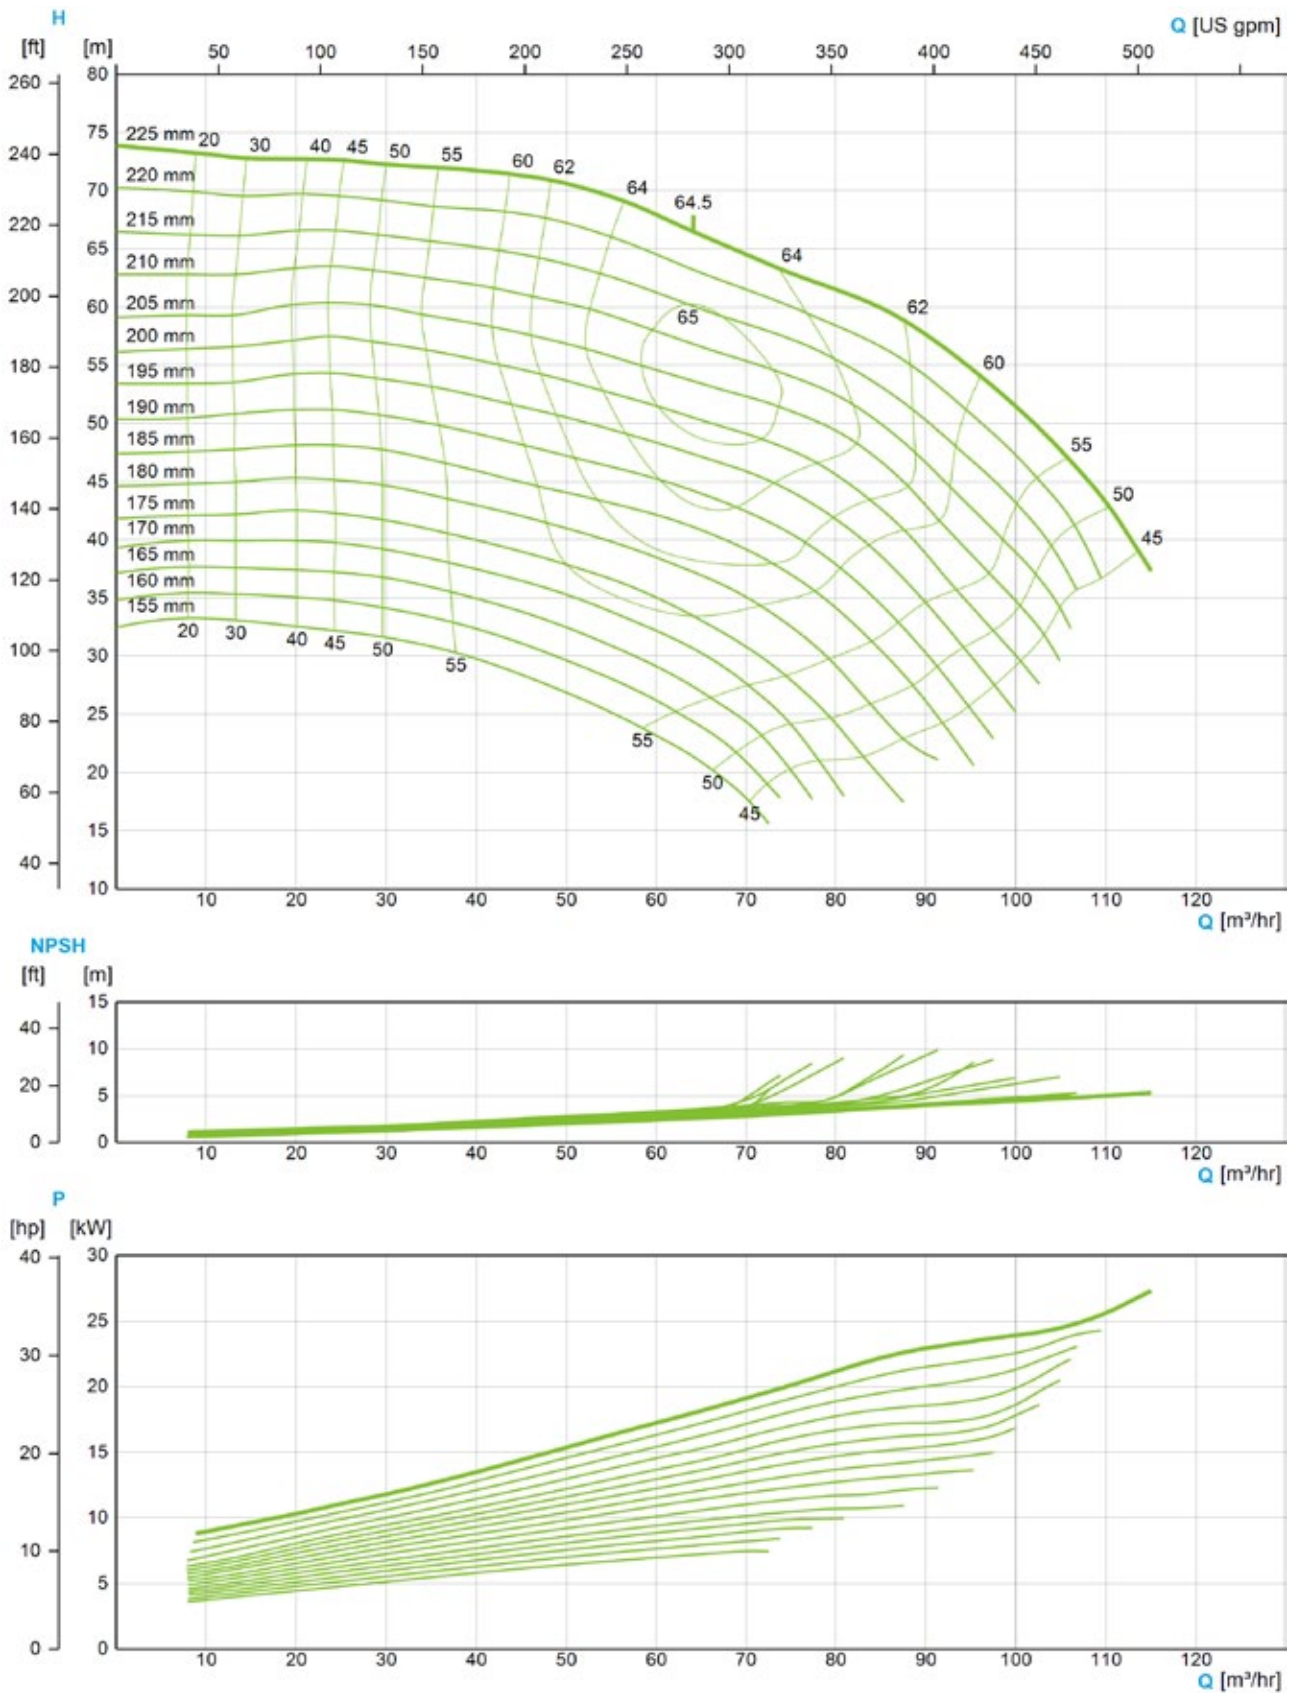

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 3"; 4", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 128 m³/h (564 US gpm)
Pump head	Max. 57 m (187 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

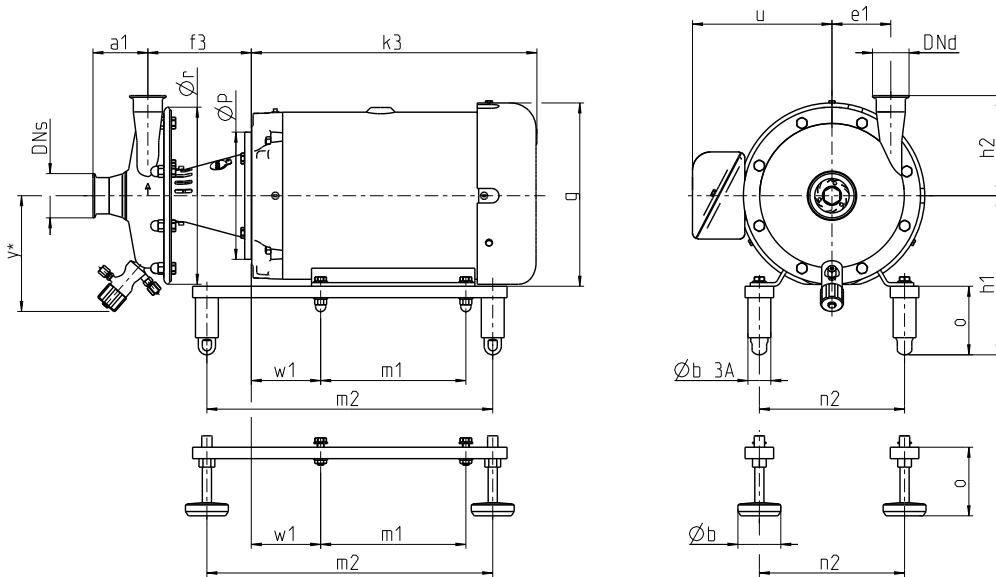

e1 = 4.49 inch
Ør = 17.01 inch
Y* = 8.50 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.12	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	190.00
213TC	7.50	16.70	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	252.00
215TC	10.00	18.27	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	386.00
254TC	15.00	18.56	6.74	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	319.00
256TC	20.00	19.35	6.74	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	355.00
284TSC	25.00	23.31	6.04	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	494.00
286TSC	30.00	23.31	6.04	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	604.00
324TSC	40.00	25.87	6.52	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	593.00


Connections

DNs 4" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	4.76	4.64	4.80	4.63	6.64	5.77	5.02	4.77	5.79
h2	9.83	9.65	9.87	9.69	11.46	10.28	9.65	9.84	10.86

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

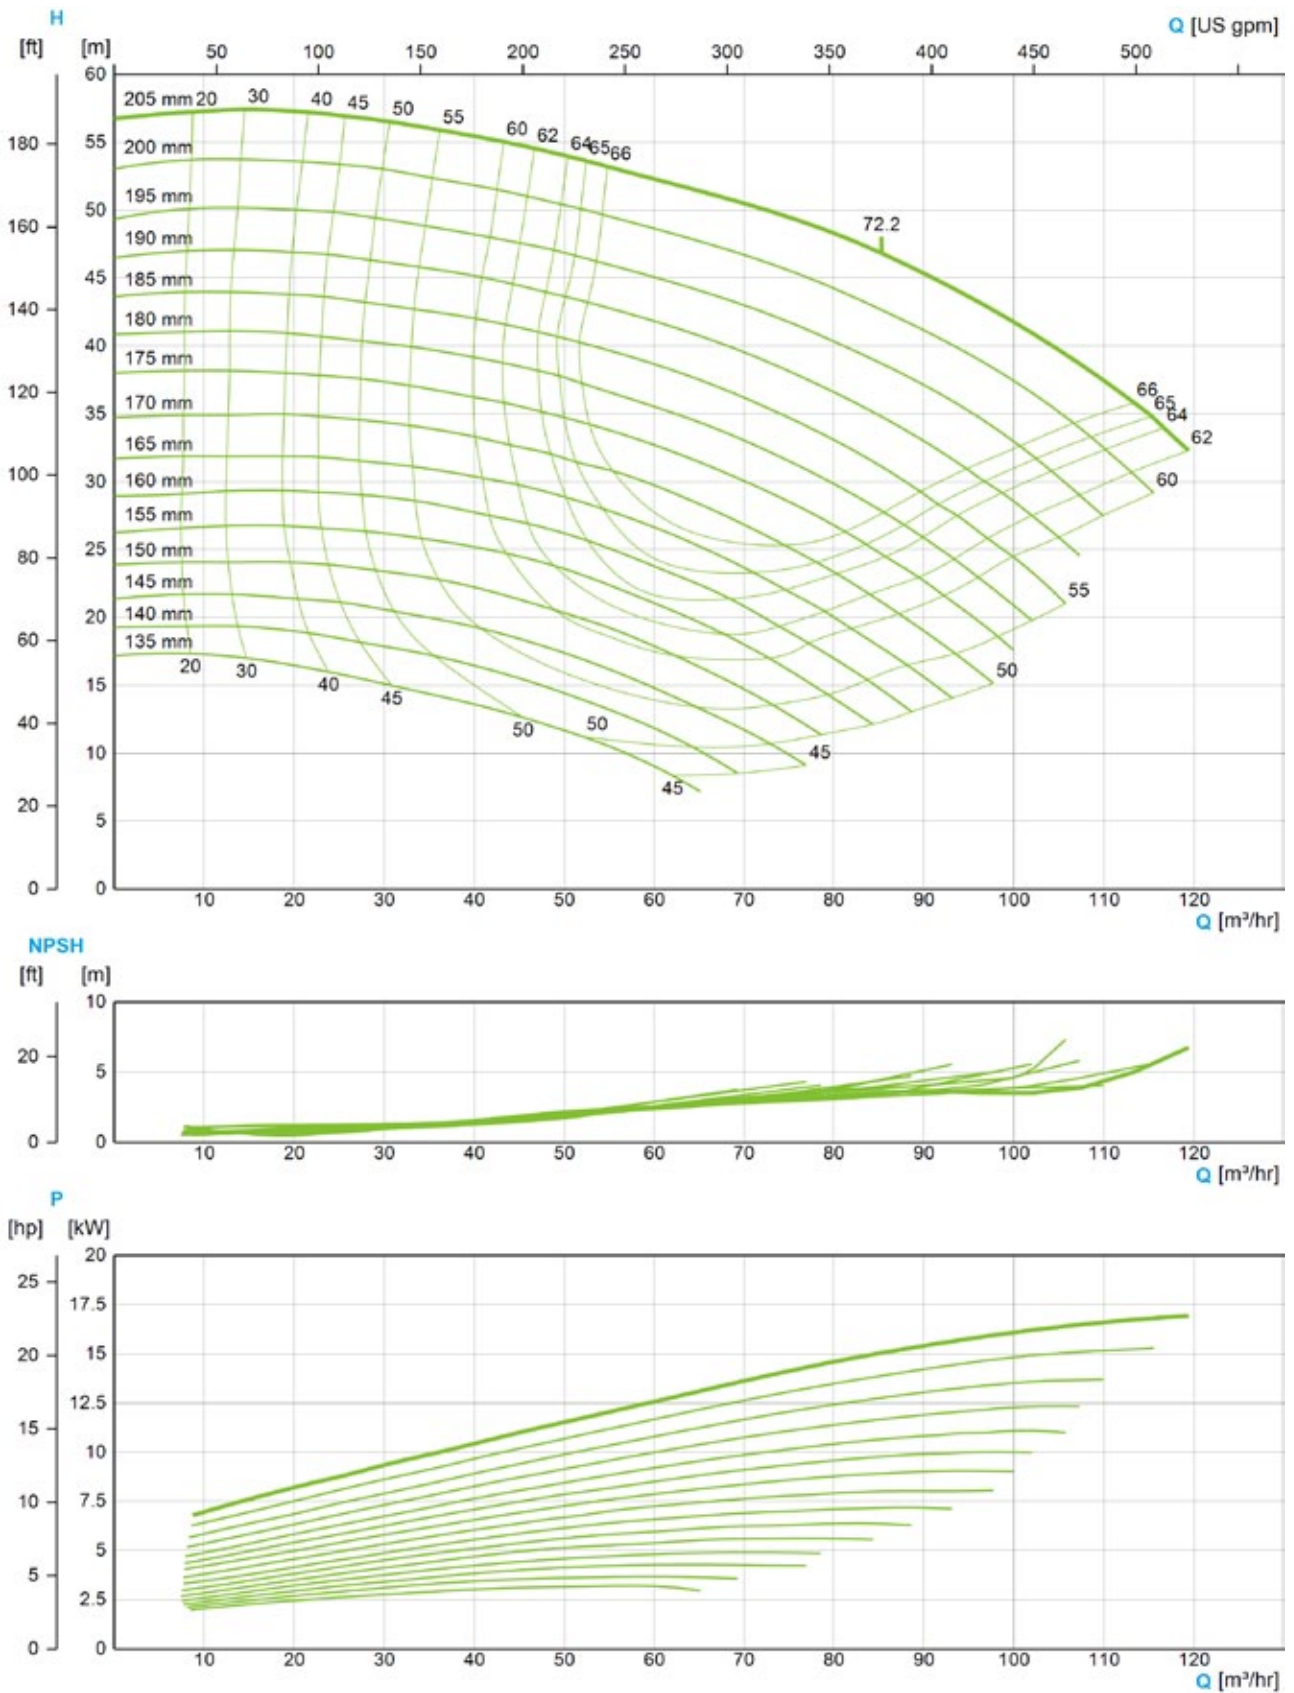

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 3"; 4", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 120 m³/h (528 US gpm)
Pump head	Max. 90 m (295 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

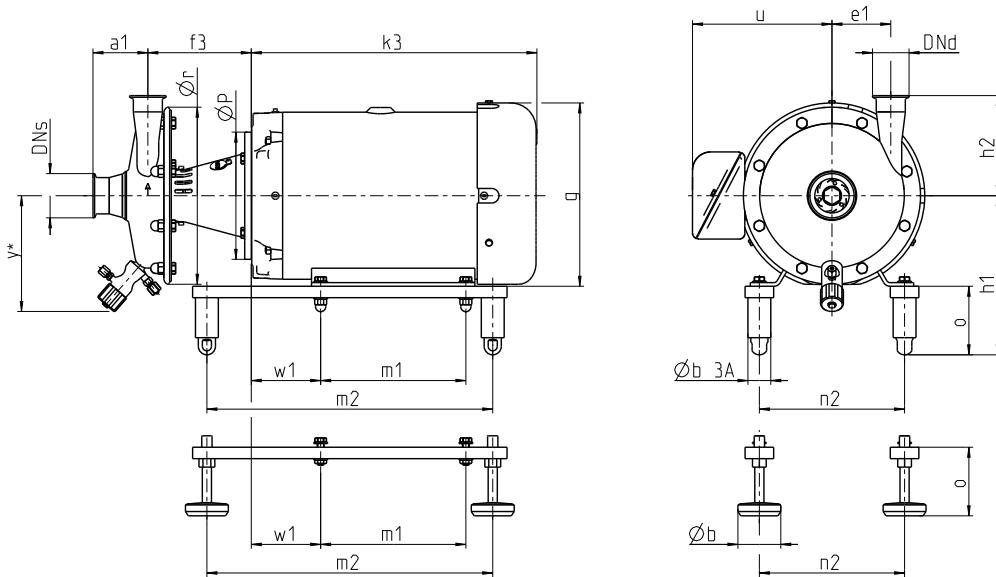


e1 = 4.88 inch
Ør = 14.13 inch
Y* = 8.82 inch

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
254TC	15.00	18.56	7.03	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	262.00
256TC	20.00	19.35	7.03	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	315.00
284TSC	25.00	23.31	6.34	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	477.00
286TSC	30.00	23.31	6.34	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	579.00
324TSC	40.00	25.87	6.81	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	683.00
326TSC	50.00	25.87	6.81	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	747.00

Connections										
DNs 4" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	4.70	4.58	4.74	4.57	6.58	5.71	4.96	4.71	5.73	
h2	9.92	9.74	9.96	9.78	11.55	10.37	9.74	9.93	10.95	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

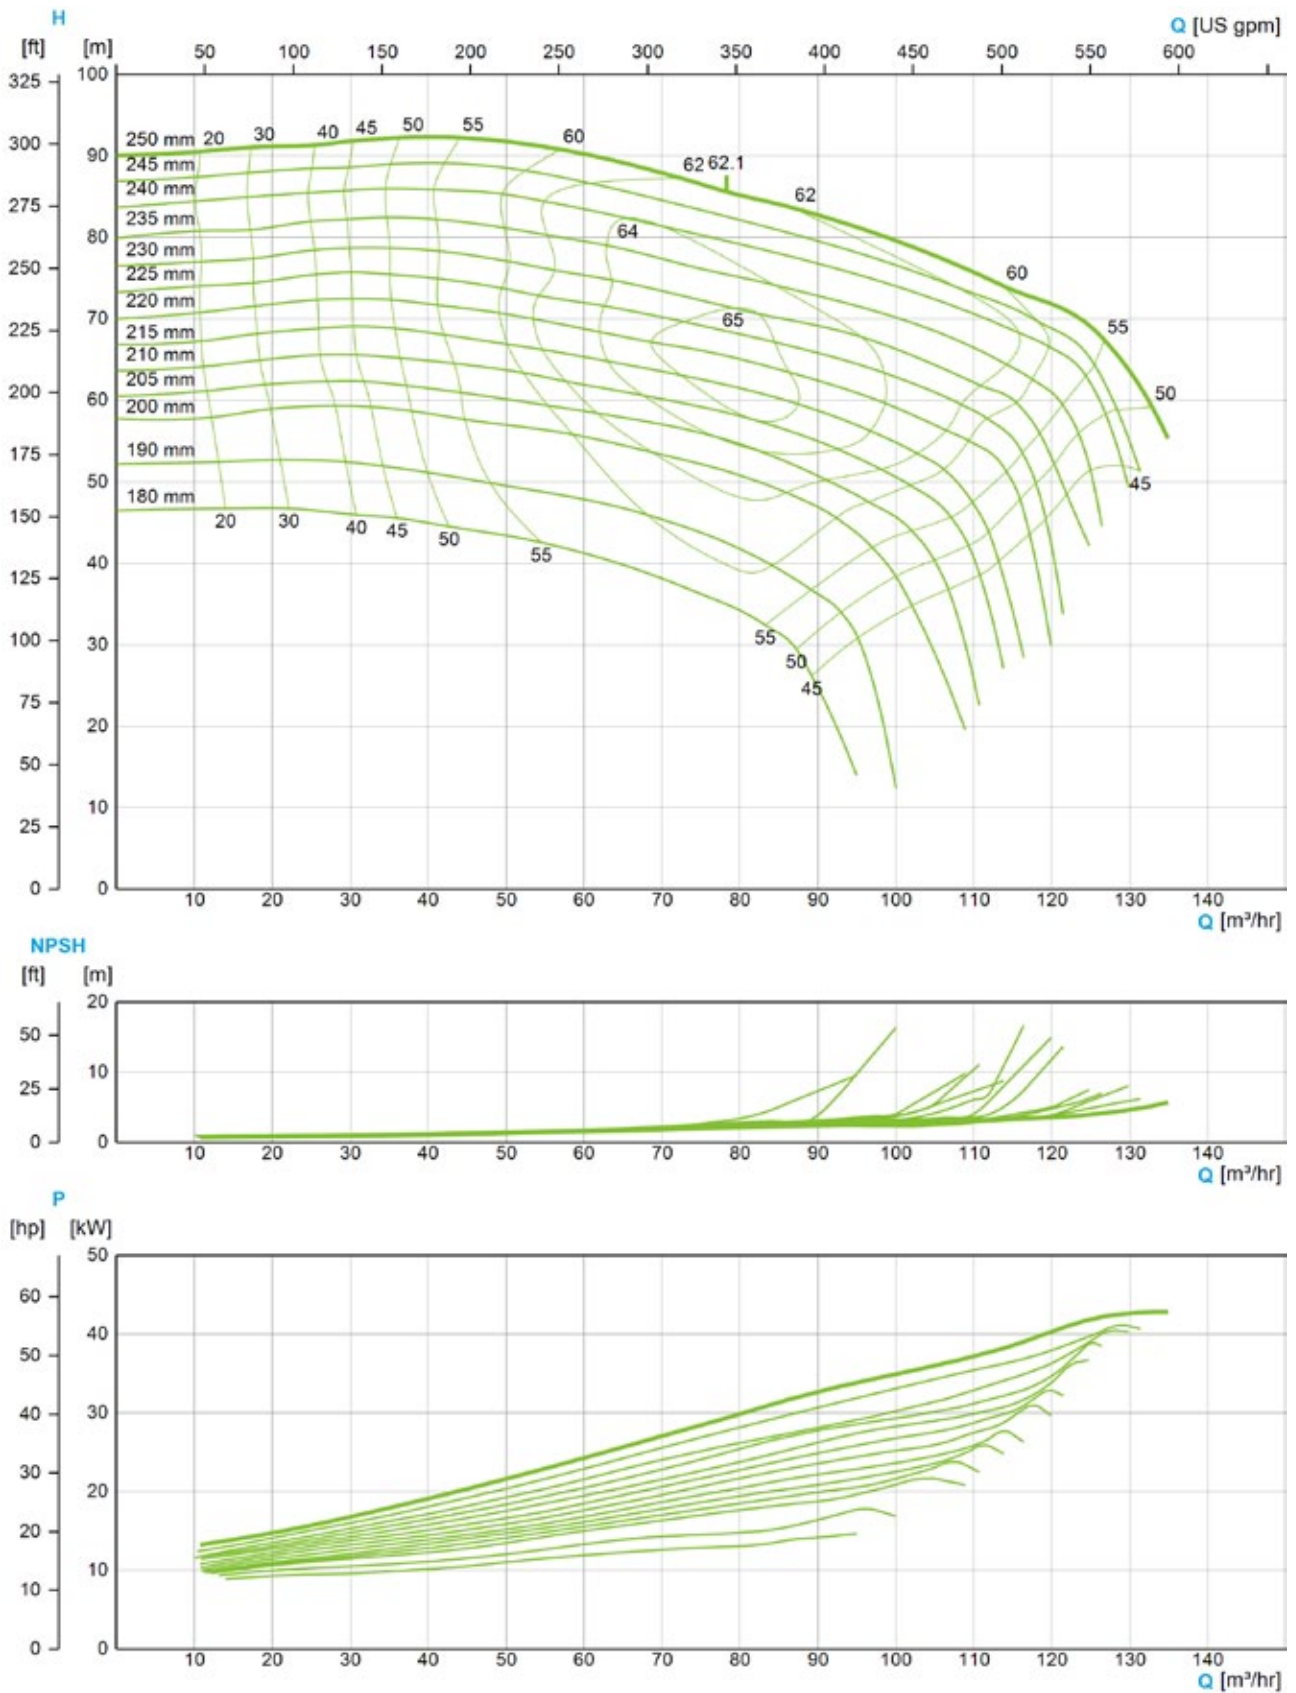

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 4", pressure side 4"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 210 m ³ /h (925 US gpm)
Pump head	Max. 49 m (161 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

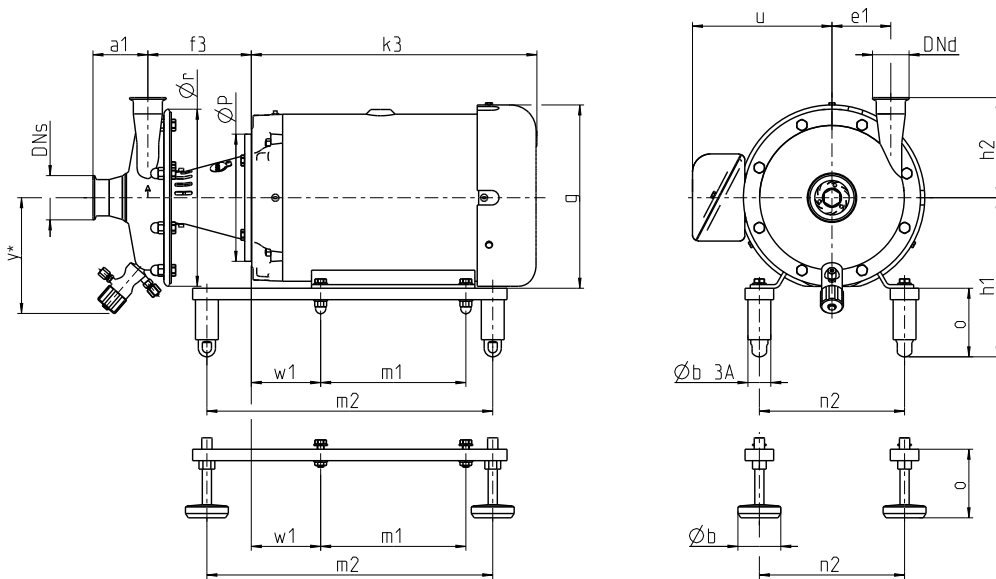

e1 = 4.25 inch
Ør = 14.02 inch
Y* = 9.15 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
254TC	15.00	18.56	6.76	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	287.00
256TC	20.00	19.35	6.76	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	327.00
284TSC	25.00	23.31	6.07	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	478.00
286TSC	30.00	23.31	6.07	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	534.00
324TSC	40.00	25.87	6.54	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	691.00
326TSC	50.00	25.87	6.54	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	755.00
364TSC	60.00	28.59	6.54	13.92	4.92	12.50	16.02	17.96	12.20	23.62	14.00	5.88	9.61	1.18	3.94	1,034.00


Connections

DNs 4" OD DNd 4" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	7.29	7.17	7.51	7.15	9.17	8.29	7.54	7.30	8.32
h2	11.72	11.60	11.94	11.58	13.60	12.72	11.98	11.73	12.75

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

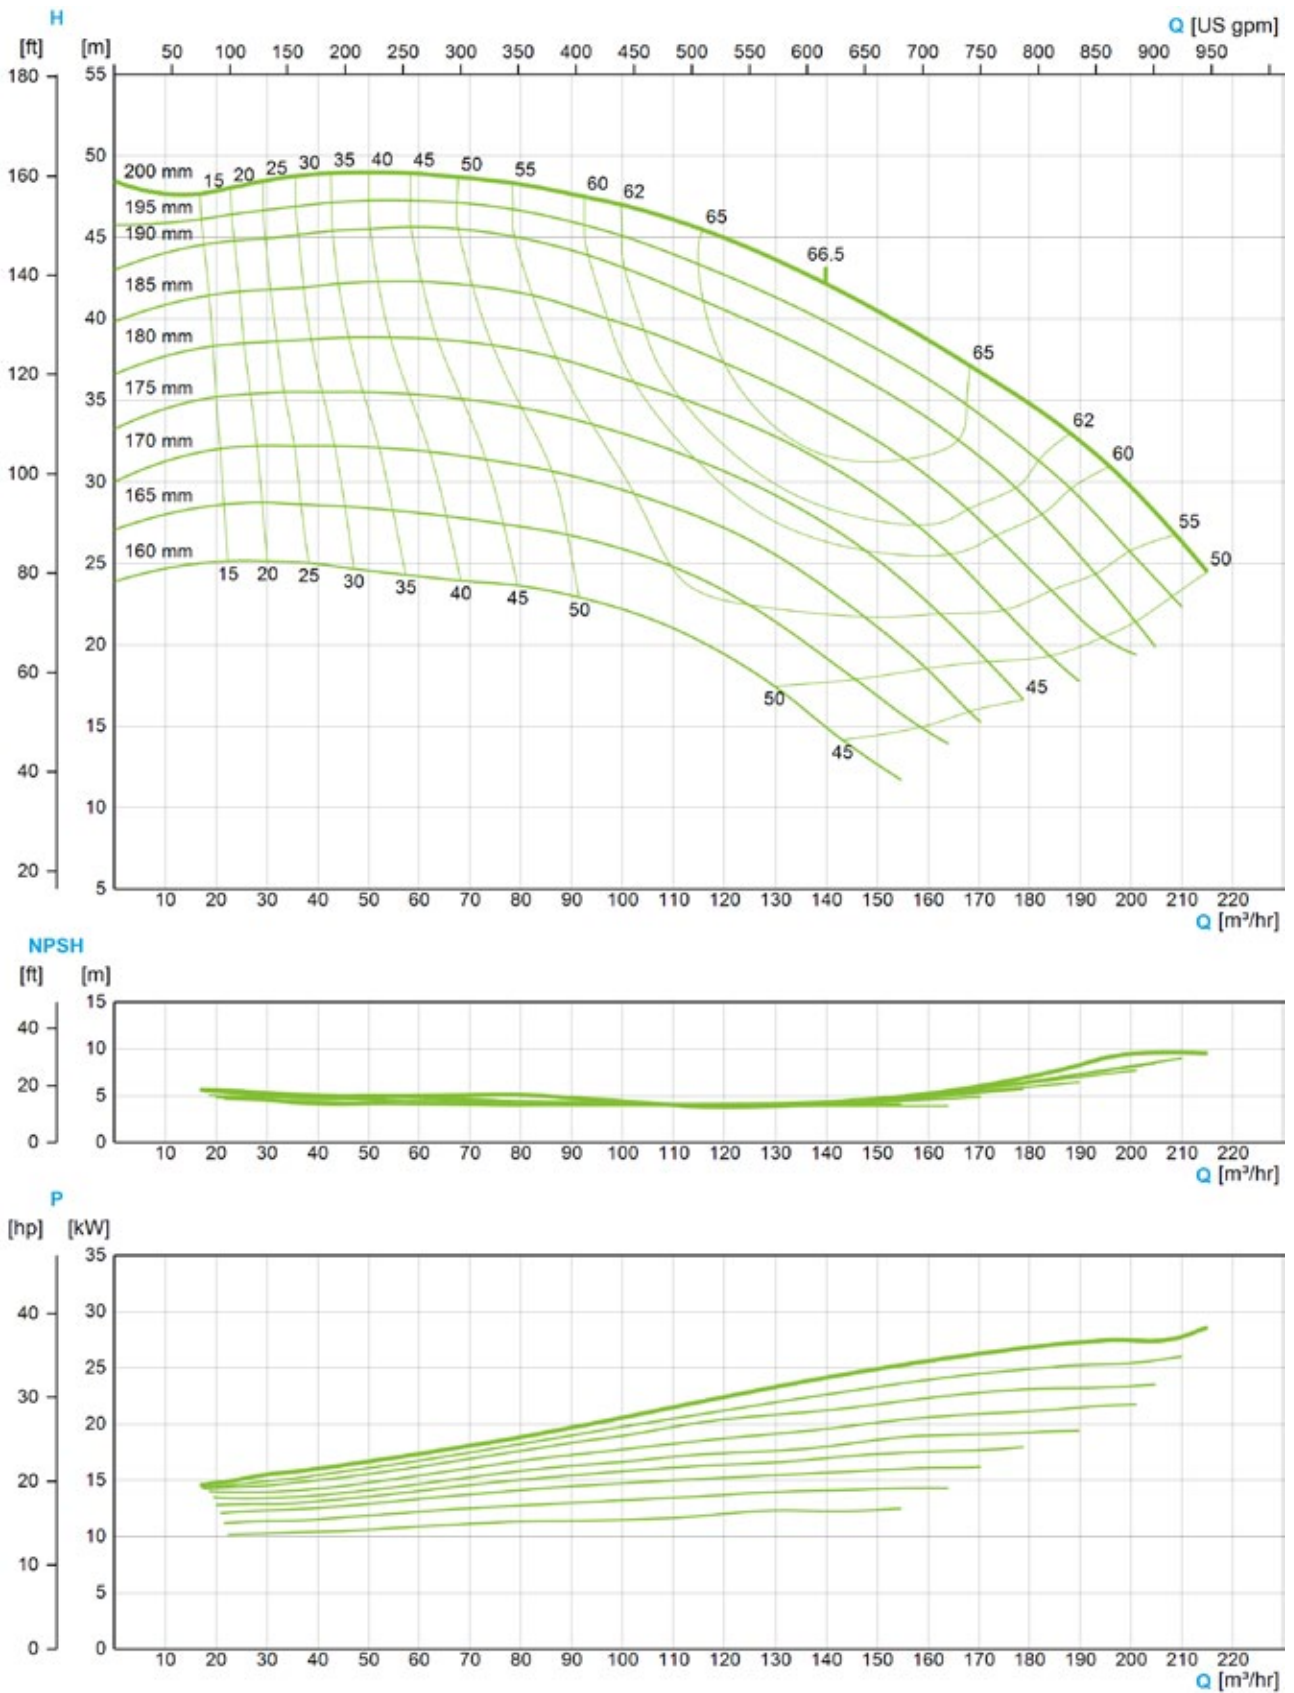

The flow charts are based on water, temperature 59 °F



**GEA Hilge TP
4-pole
50 Hz**

GEA Hilge TP 1020

GEA Hilge TP 1540

GEA Hilge TP 2030

GEA Hilge TP 2050

GEA Hilge TP 2575

GEA Hilge TP 3050

GEA Hilge TP 5060

GEA Hilge TP 7060

GEA Hilge TP 8050

GEA Hilge TP 8080

GEA Hilge TP 16040




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2", pressure side 1½"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 10 m³/h (44 US gpm)
Pump head	Max. 6 m (20 ft)
Housing pressure	Max. 10 bar (145 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

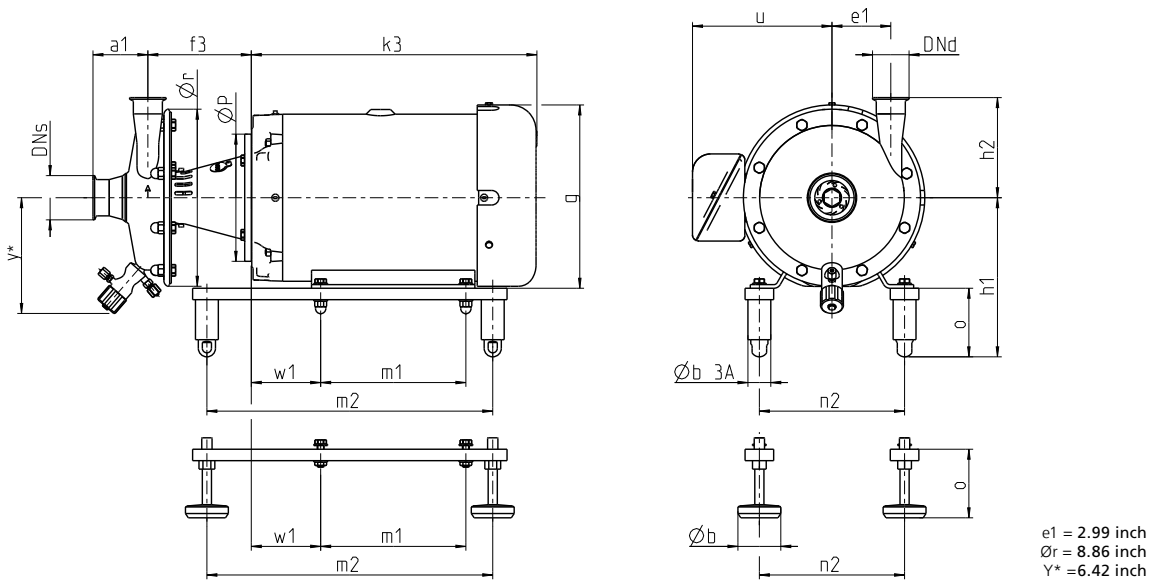


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	75.00
143TC	1.50	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	76.00
145TC	2.00	11.73	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	79.00
182TC	3.00	13.59	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	128.00
184TC	5.00	15.16	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	119.00

Connections										
DNs 2" OD DNd 1 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.43	2.12	2.34	2.30	3.81	3.20	2.10	2.31	3.46	
h2	5.82	5.26	5.64	5.68	7.14	6.00	5.48	5.70	6.85	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

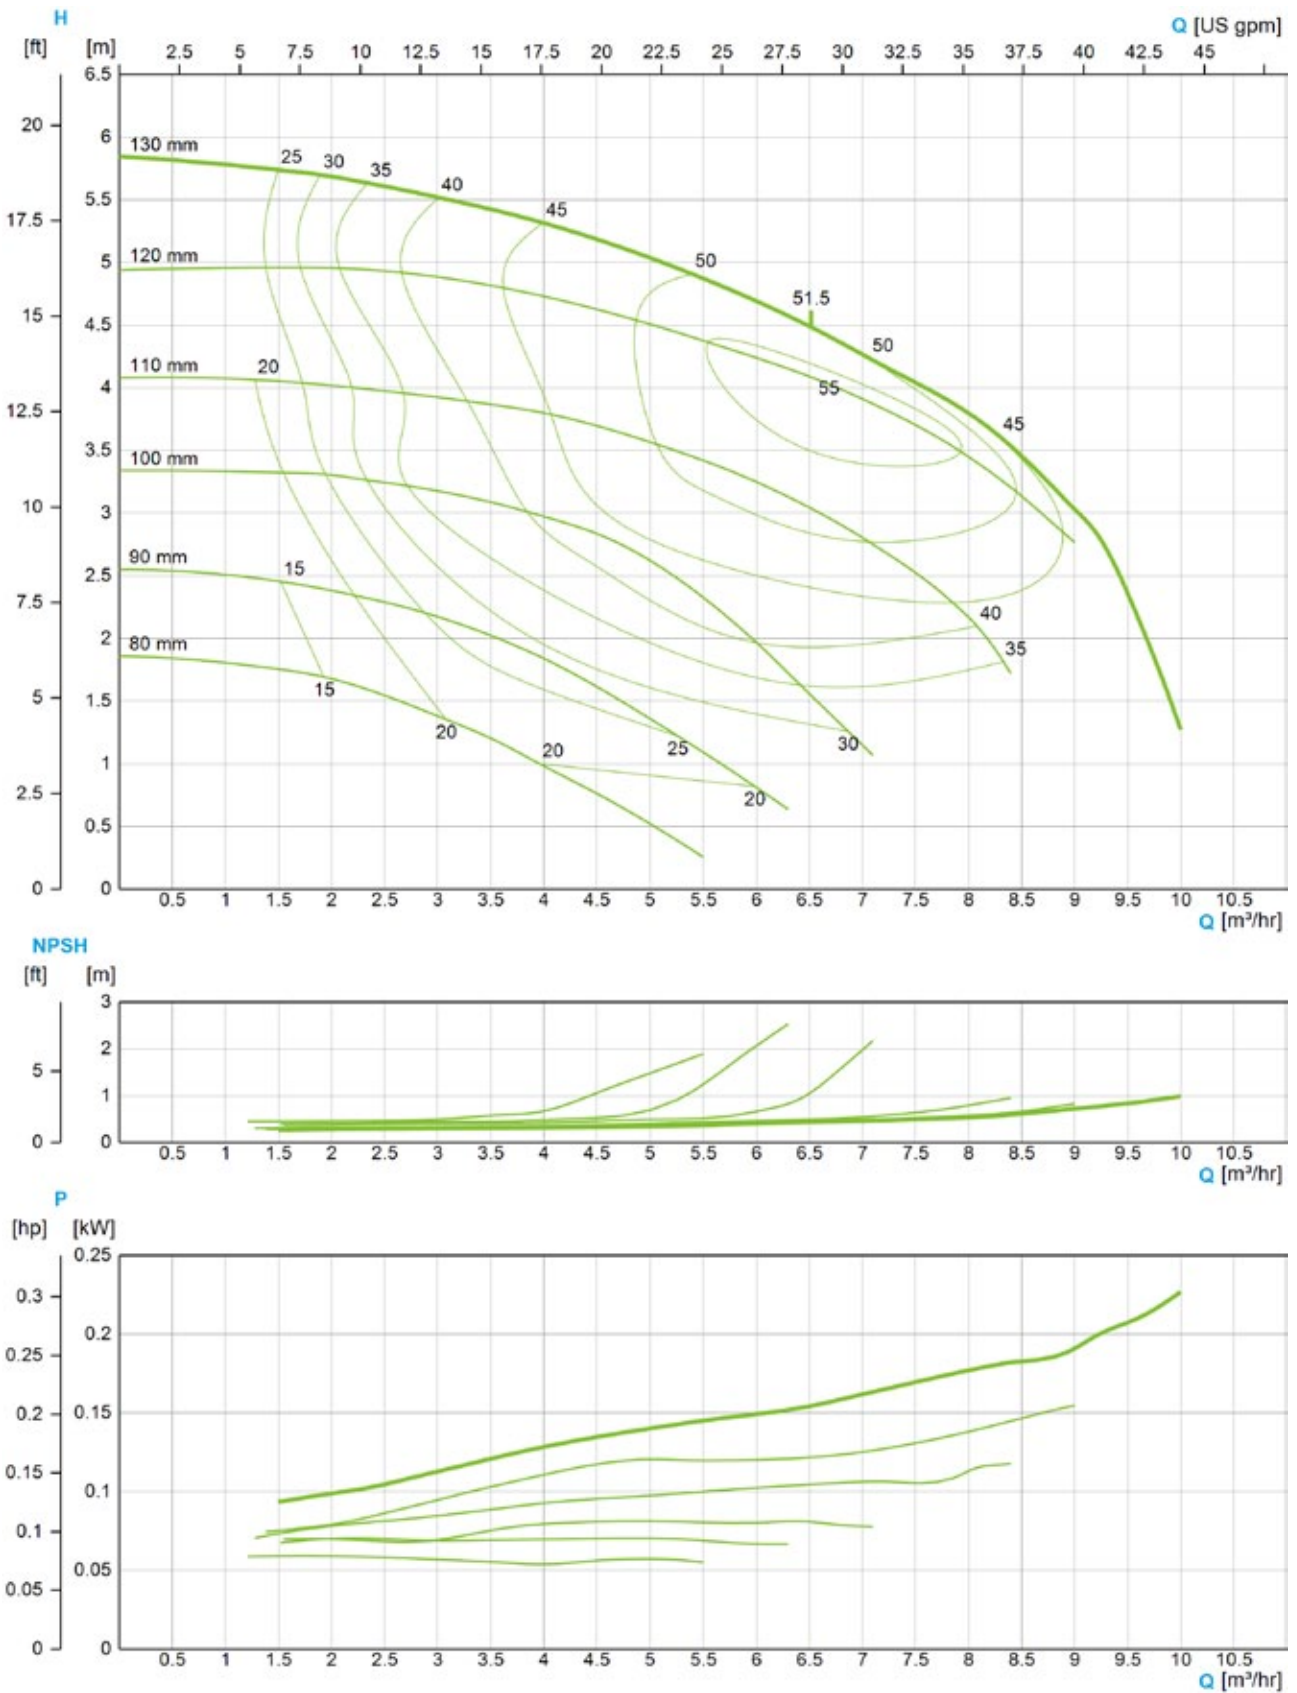

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2 1/2"; 3", pressure side 1 1/2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 19 m ³ /h (84 US gpm)
Pump head	Max. 11 m (36 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

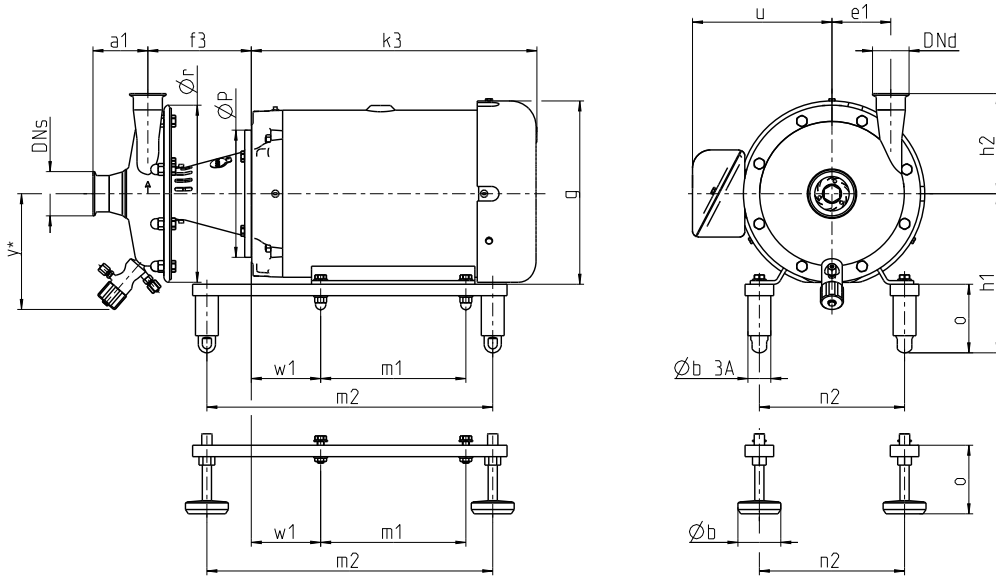

e1 = 3.54 inch
Ør = 10.79 inch
Y* = 7.28 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.50	11.33	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	85.00
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	88.00
182TC	3.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	137.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	129.00


Connections

DNs 3" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.67	2.49	2.77	2.53	4.30	3.12	2.49	2.68	3.70
h2	6.24	5.68	6.06	6.10	7.56	6.42	5.91	6.12	7.27

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

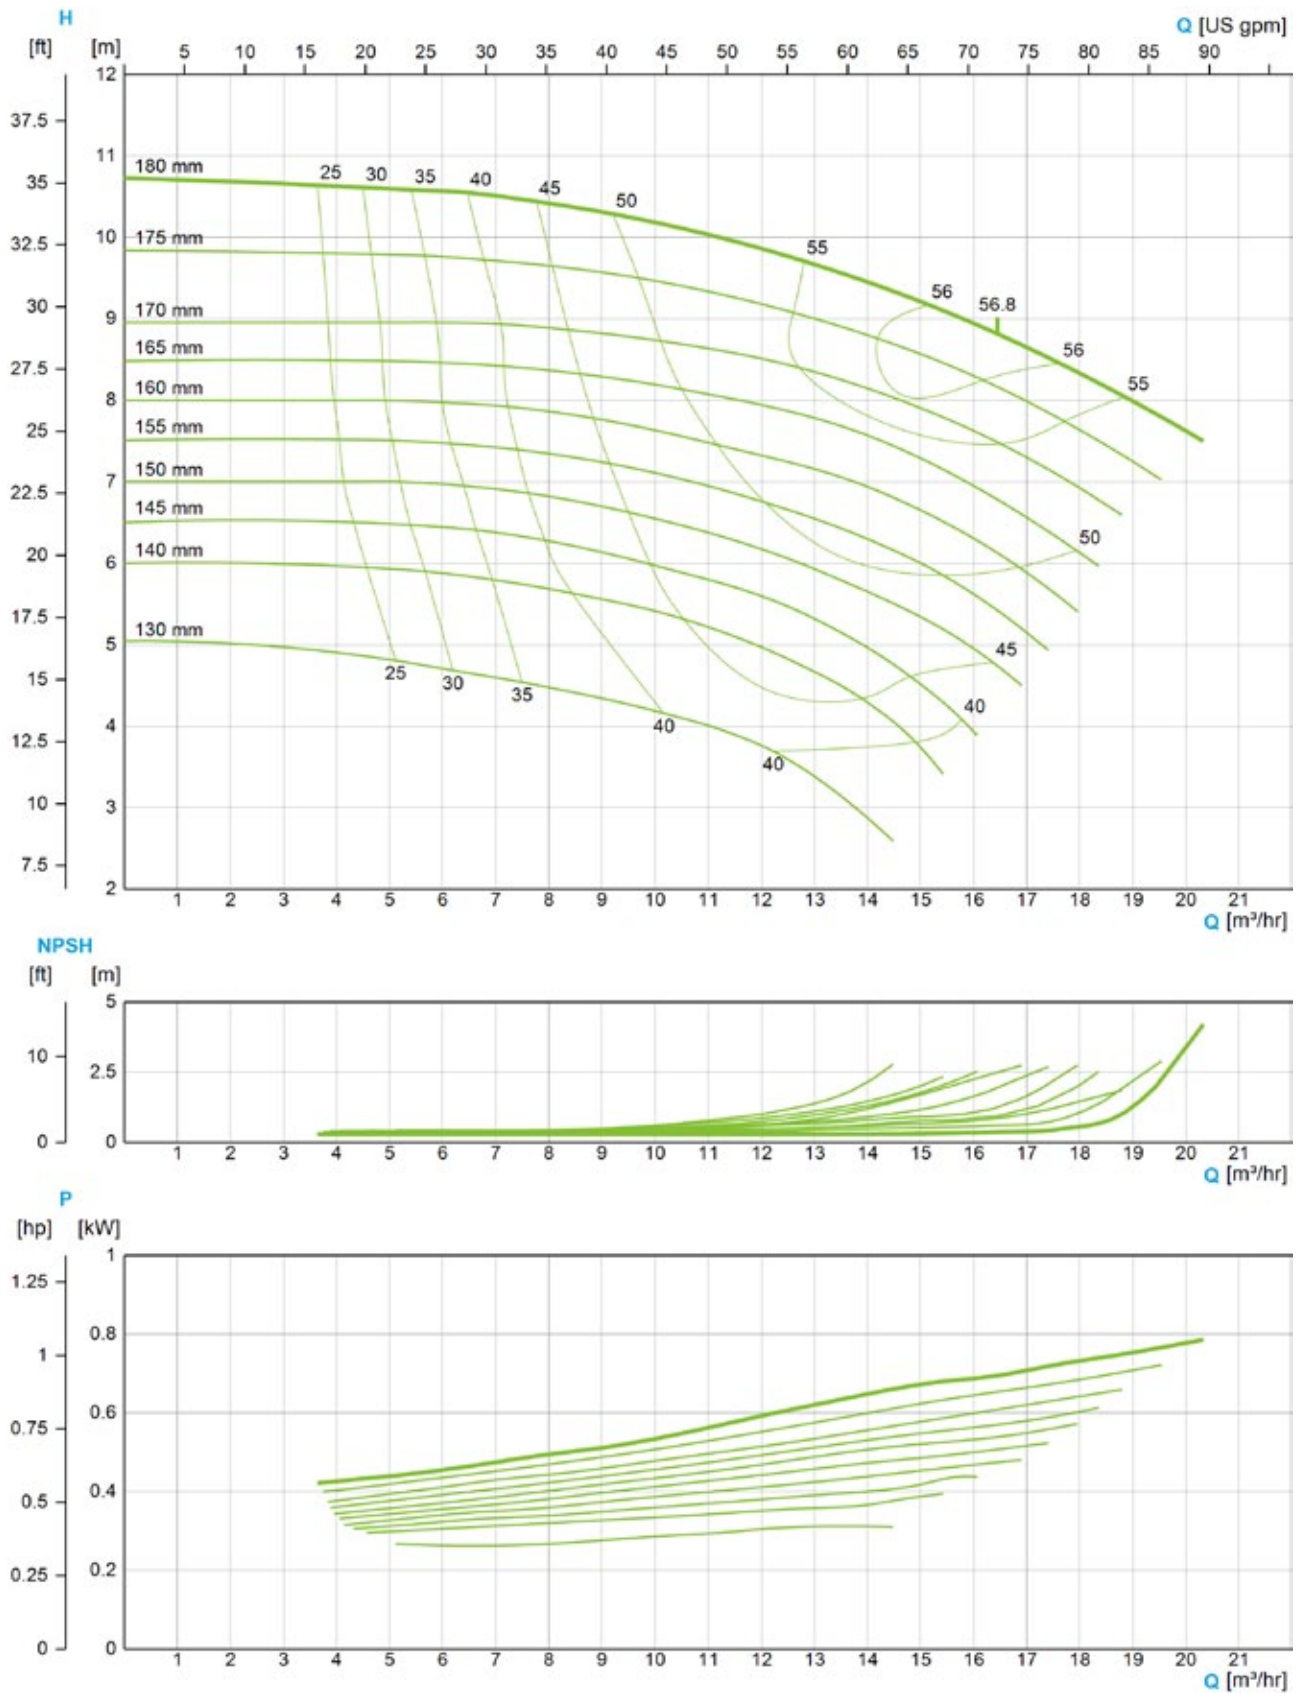

Weight: net-weight without packaging




The flow charts are based on water, temperature 59 °F





Technical data of the standard version	
Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2 1/2"; 3", pressure side 1 1/2"; 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 19 m ³ /h (84 US gpm)
Pump head	Max. 9 m (30 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	 


Further options see page 150 (Composition of Order Code)

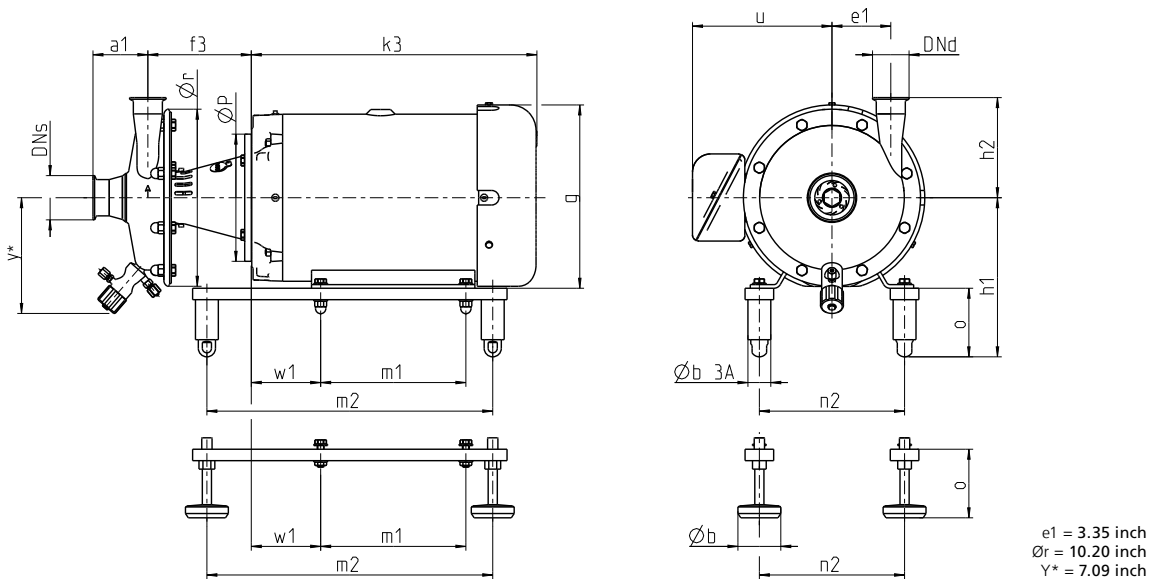

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	81.00
143TC	1.50	11.33	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	82.00
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	85.00
182TC	3.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	134.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	126.00
213TC	7.50	15.52	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	132.00

Connections										
DNS 2 1/2" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.55	2.37	2.59	2.41	4.18	3.00	2.37	2.56	3.58	
h2	6.05	5.49	5.87	5.91	7.37	6.23	5.72	5.93	7.08	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

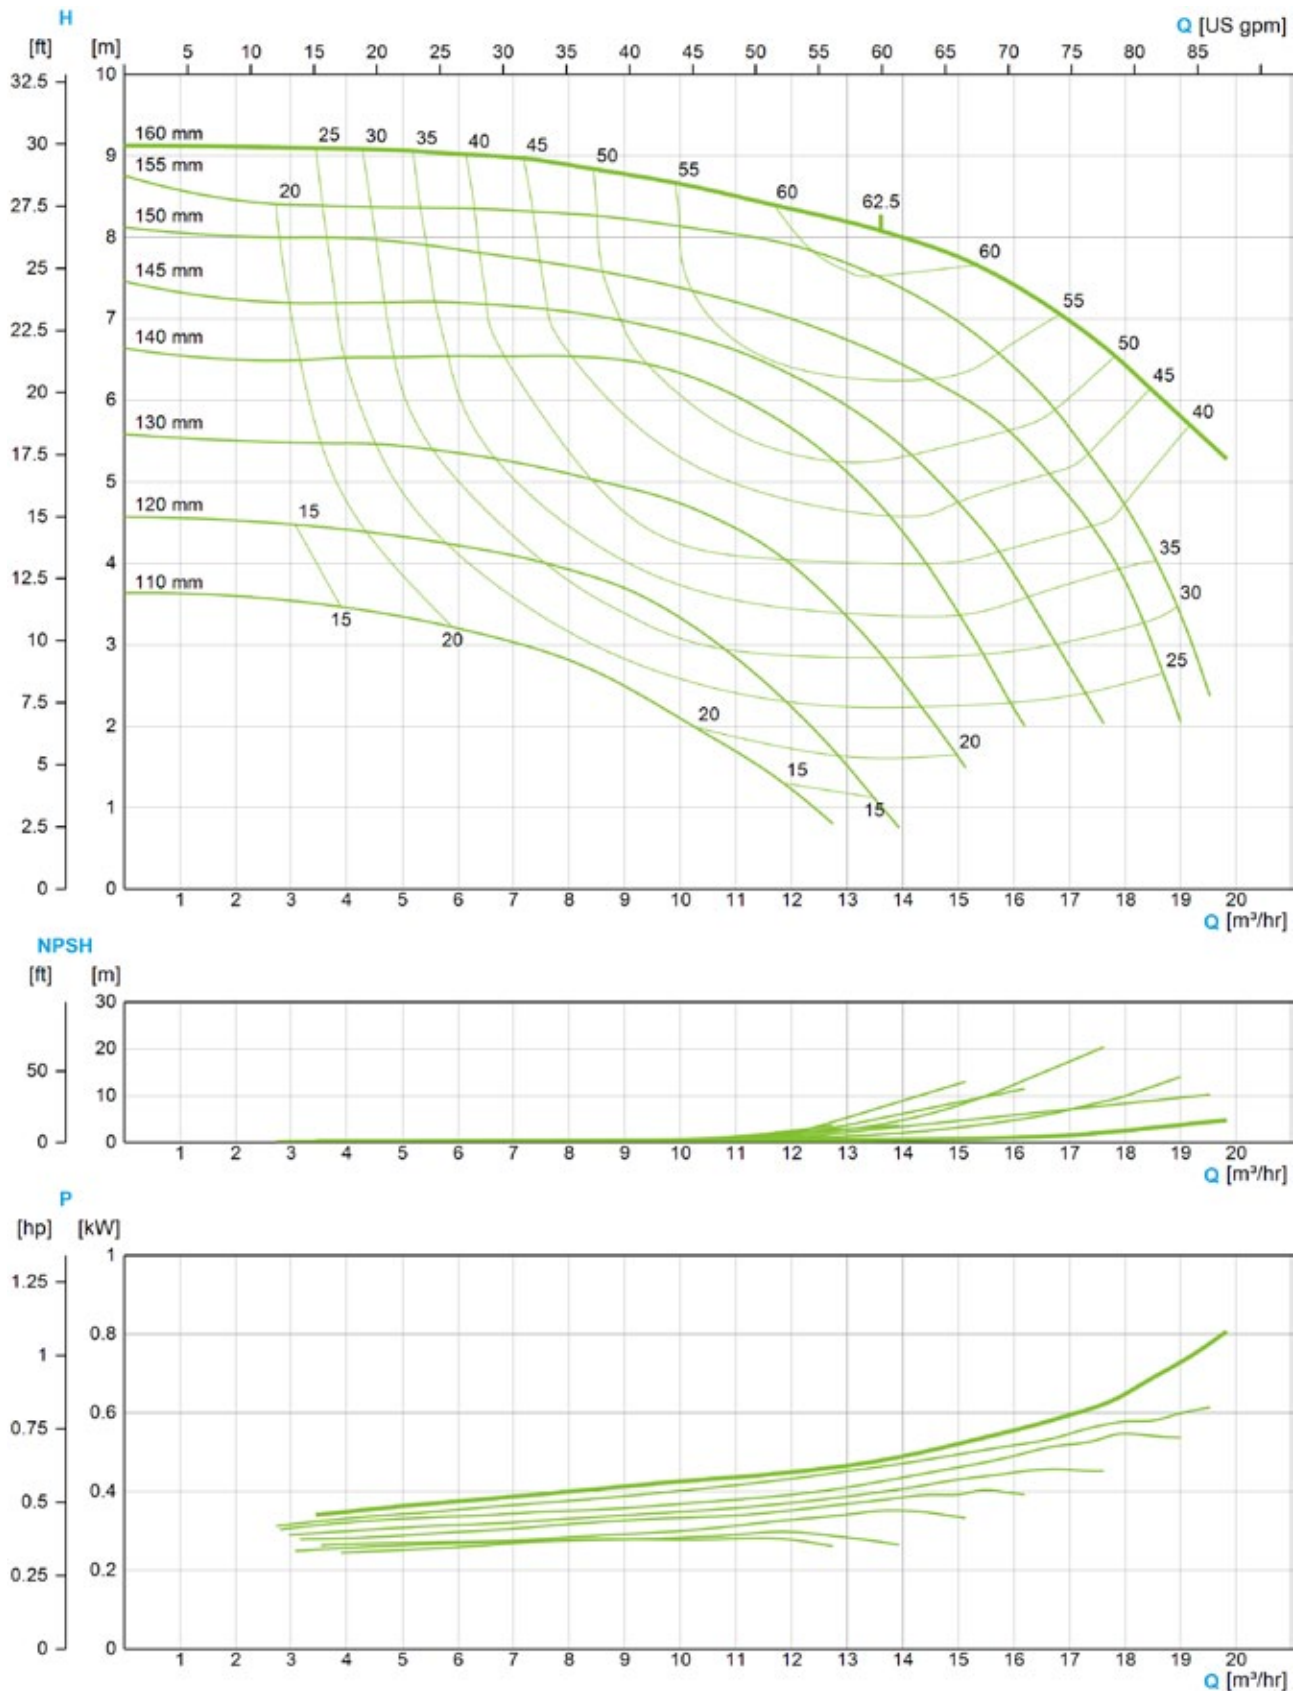



The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2 1/2"; 3", pressure side 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 19 m³/h (84 US gpm)
Pump head	Max. 15 m (49 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	 

Further options see page 150 (Composition of Order Code)

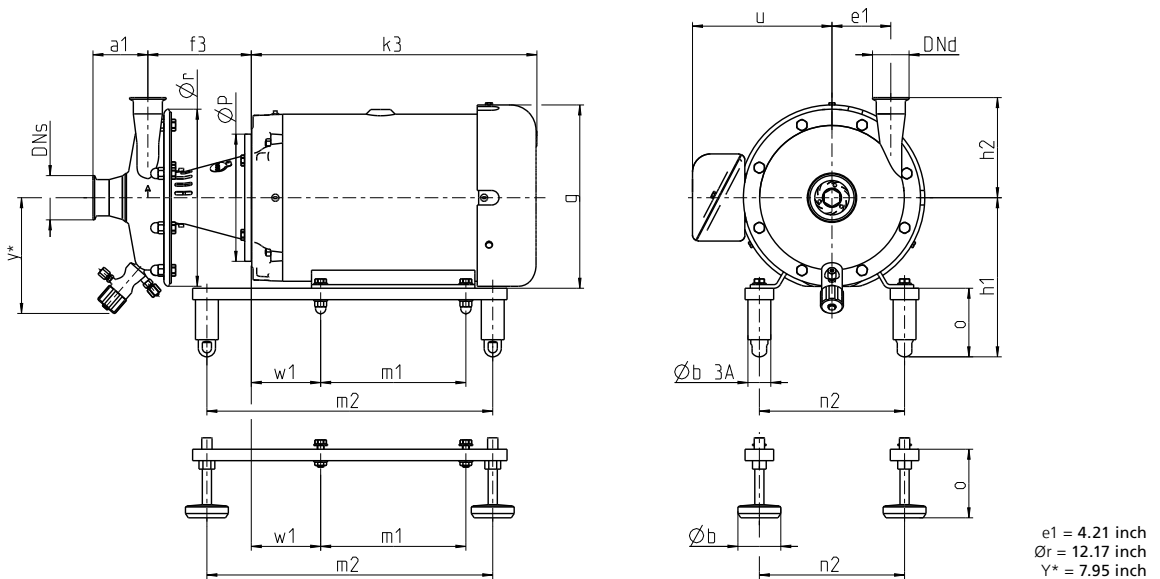


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.17	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	89.00
143TC	1.50	11.33	5.17	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	90.00
145TC	2.00	11.73	5.17	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	93.00
182TC	3.00	15.16	6.37	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	142.00
184TC	5.00	15.16	6.37	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	134.00
213TC	7.50	15.52	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	140.00
215TC	10.00	15.91	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	172.00

Connections										
DN _s 3" OD DN _d 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.94	2.75	3.03	2.80	4.56	3.39	2.76	2.94	3.96	
h2	7.19	6.87	7.09	7.05	8.56	7.44	6.85	7.19	8.21	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

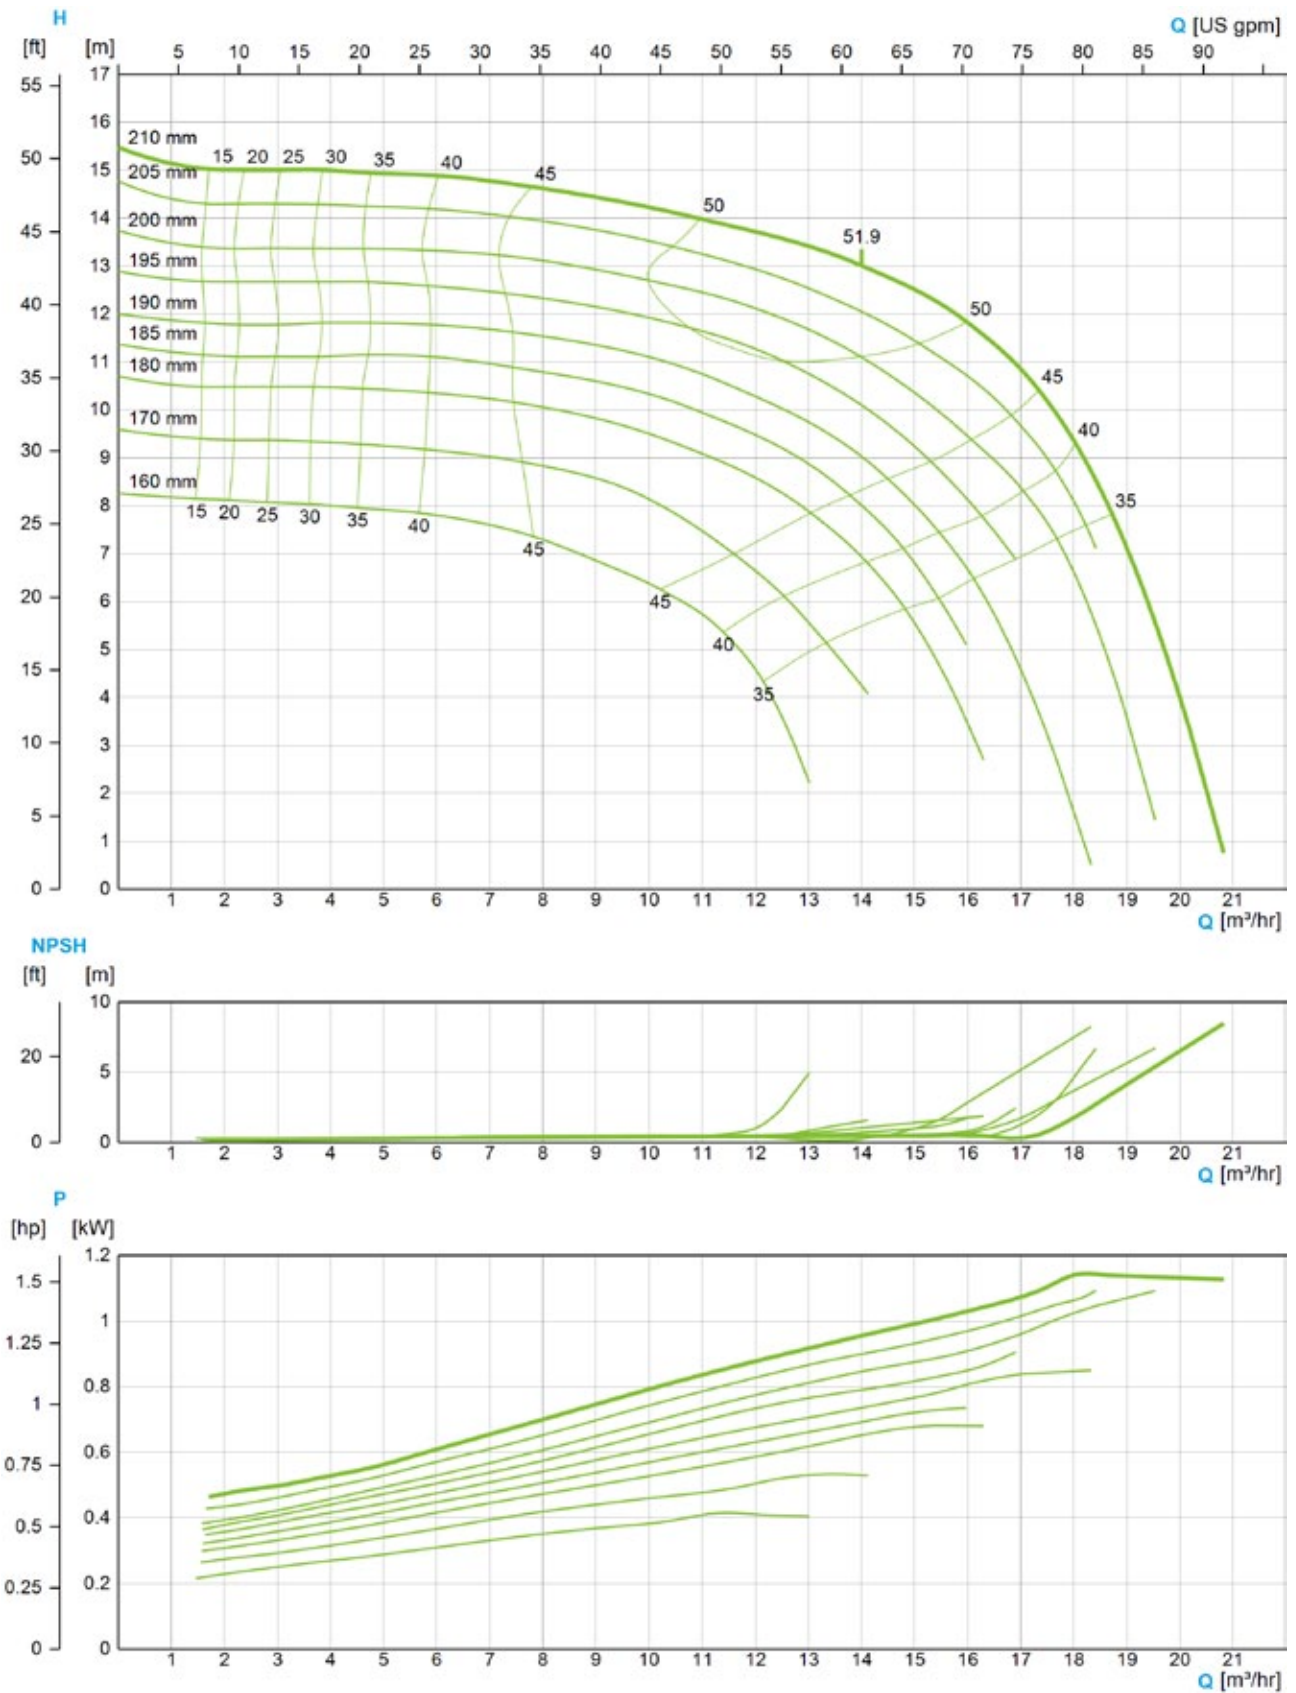

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", pressure side 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 20 m³/h (88 US gpm)
Pump head	Max. 21 m (69 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

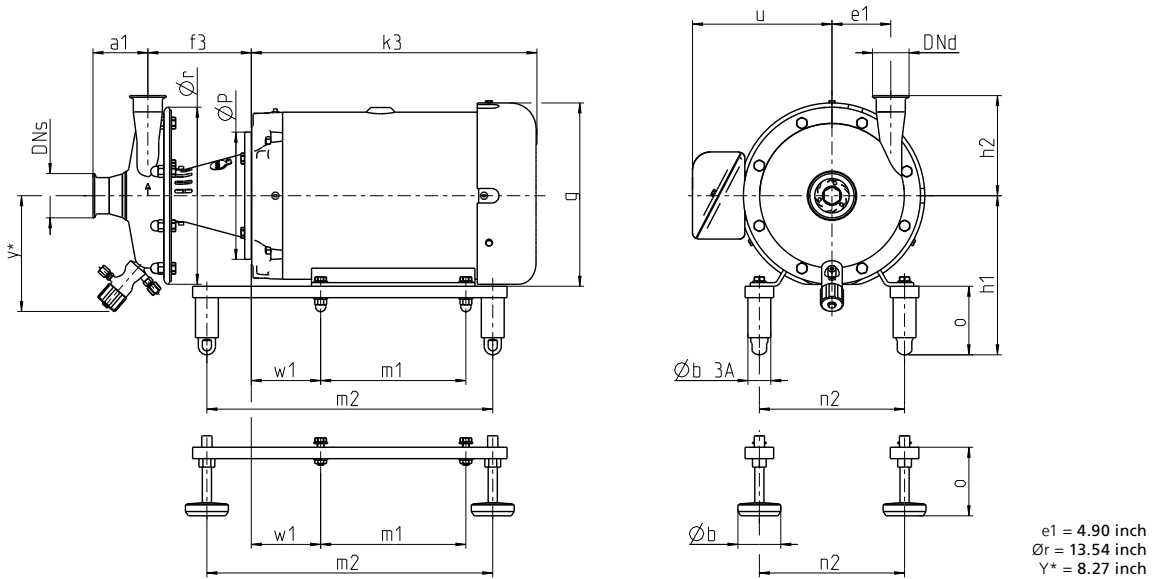


Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.43	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	141.00
213TC	7.50	15.52	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	147.00
215TC	10.00	15.91	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	179.00

Connections



DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.89	2.71	2.99	2.76	4.52	3.35	2.72	2.90	3.92
h2	8.24	7.93	8.15	8.11	9.62	8.50	7.91	8.25	9.27

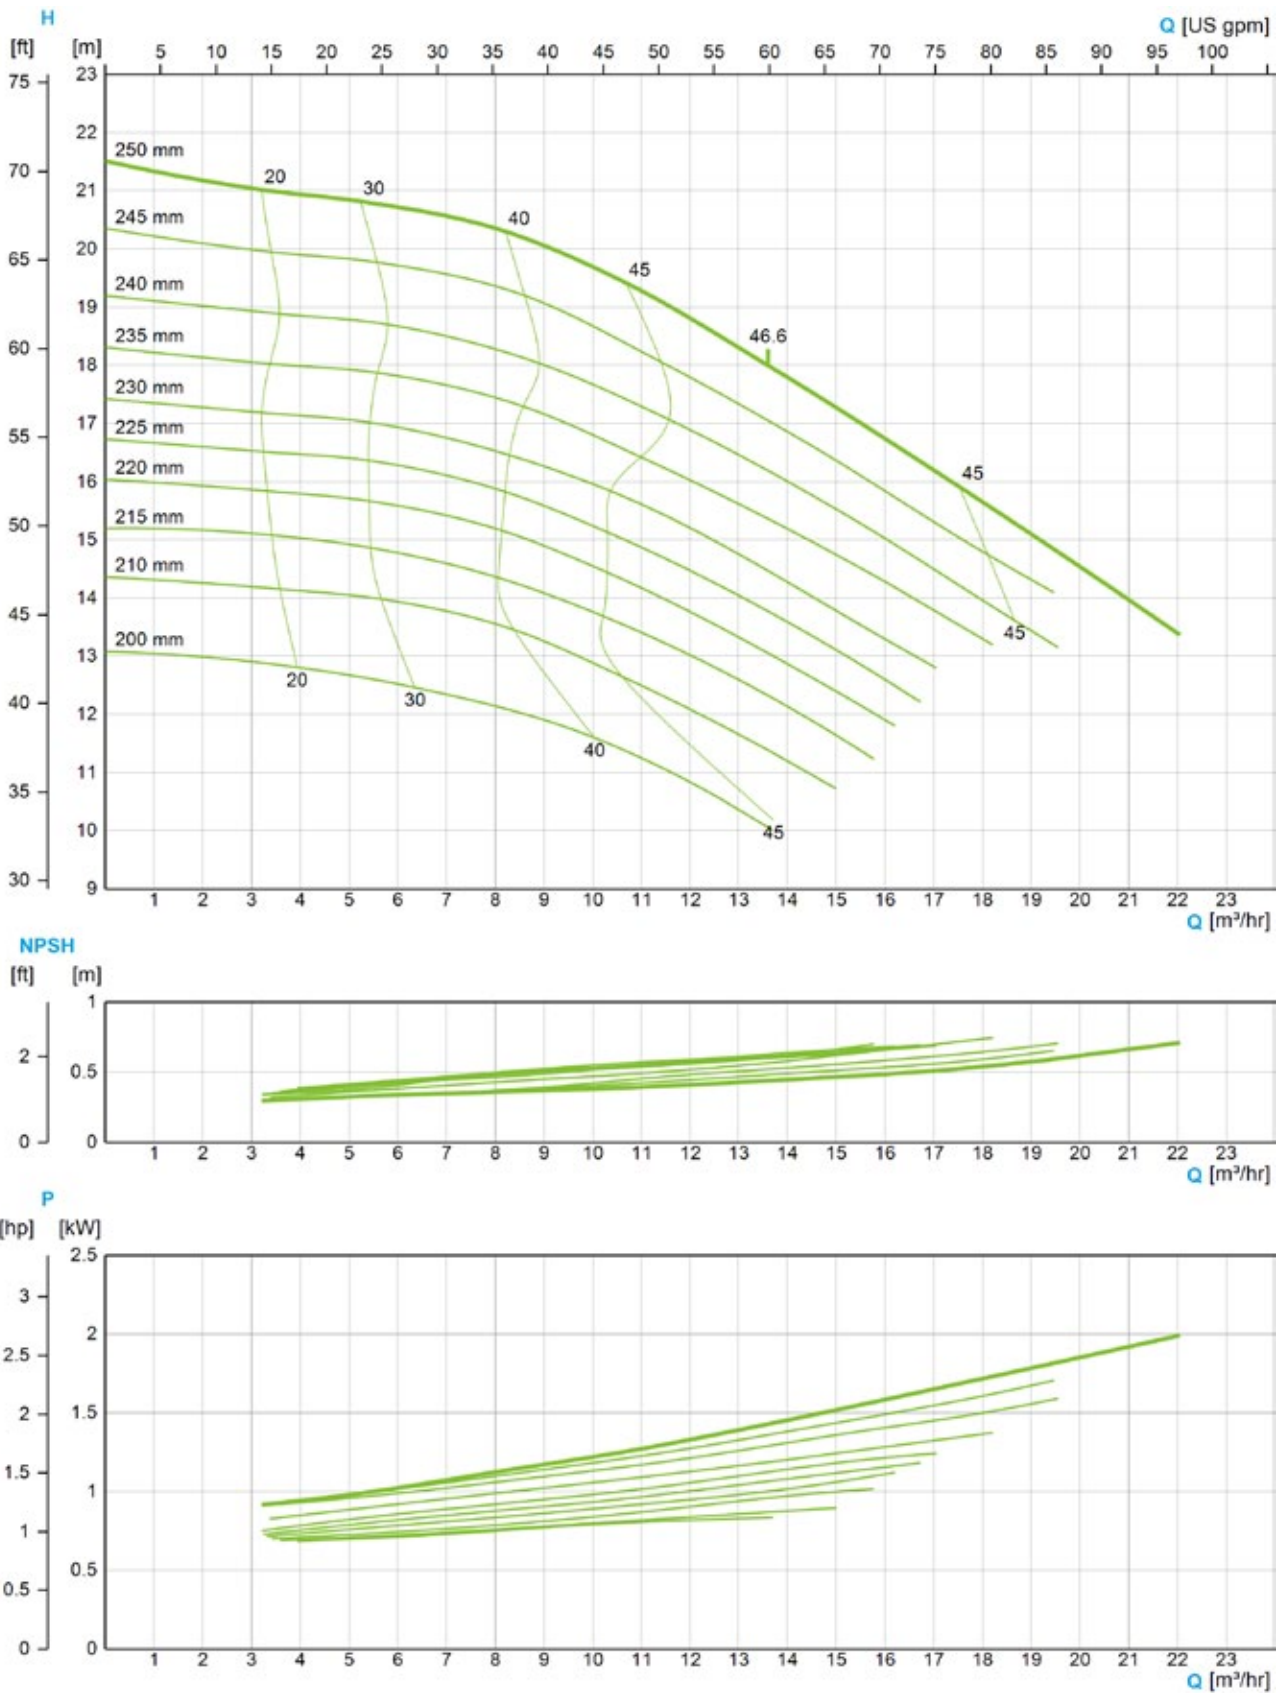Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging




The flow charts are based on water, temperature 59 °F



Technical data of the standard version	
Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2½"; 3", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 36 m³/h (158 US gpm)
Pump head	Max. 16 m (53 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	 

Further options see page 150 (Composition of Order Code)

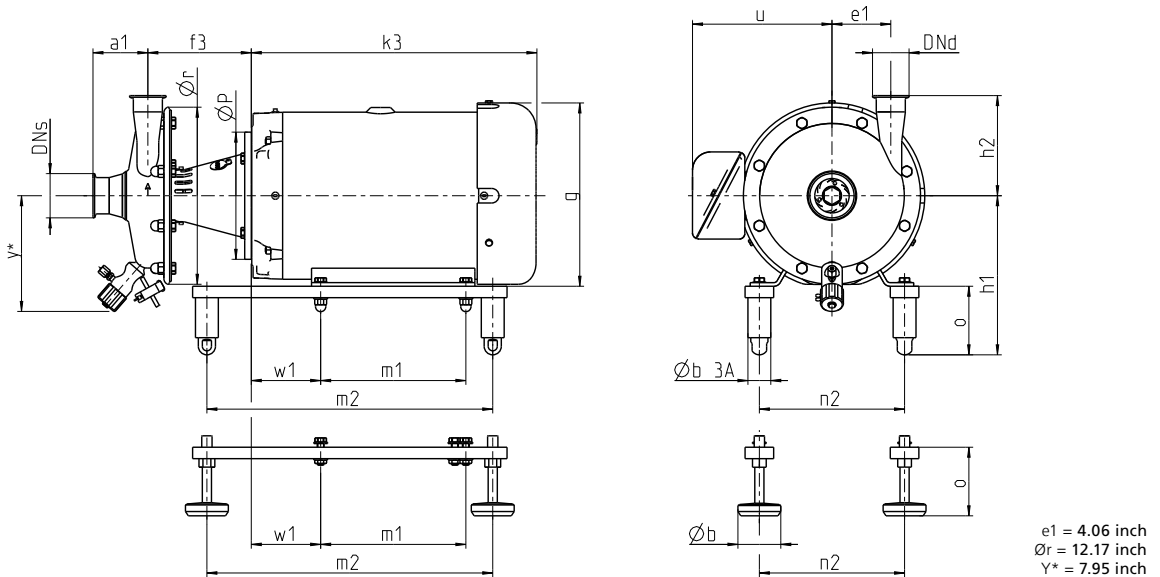




Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.09	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	102.00
143TC	1.50	11.33	5.09	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	93.00
145TC	2.00	11.73	5.09	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	96.00
182TC	3.00	15.16	6.29	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	145.00
184TC	5.00	15.16	6.29	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	137.00
213TC	7.50	15.52	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	143.00
215TC	10.00	15.91	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	175.00

Connections										
DN _s 3" OD DN _d 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.87	2.69	2.97	2.74	4.50	3.33	2.70	2.88	3.90	
h2	6.90	6.59	6.81	6.76	8.28	7.15	6.56	6.91	7.93	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

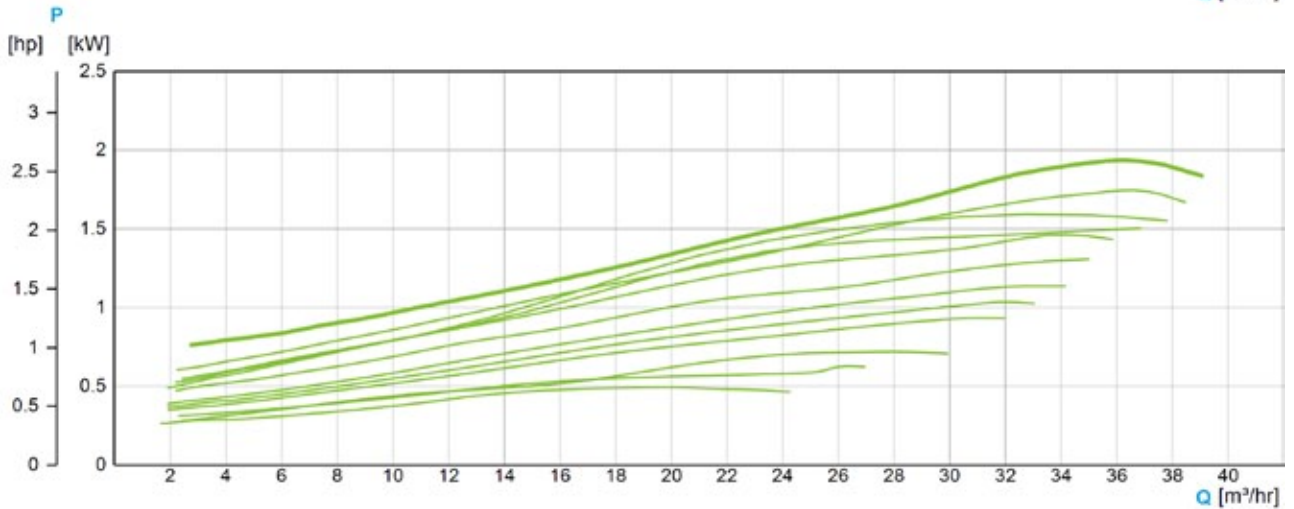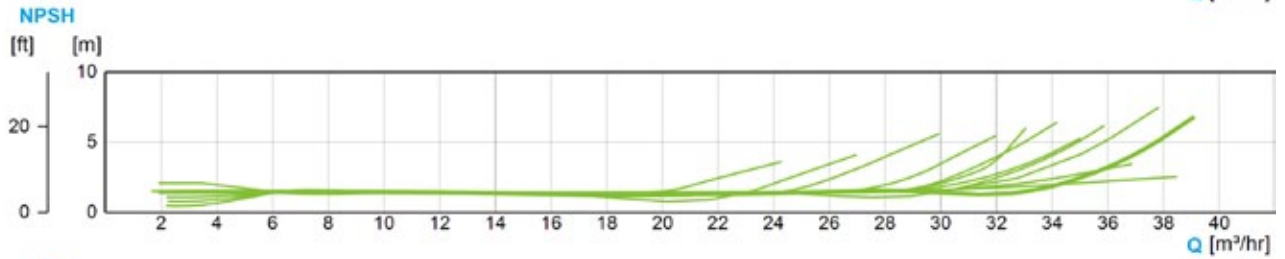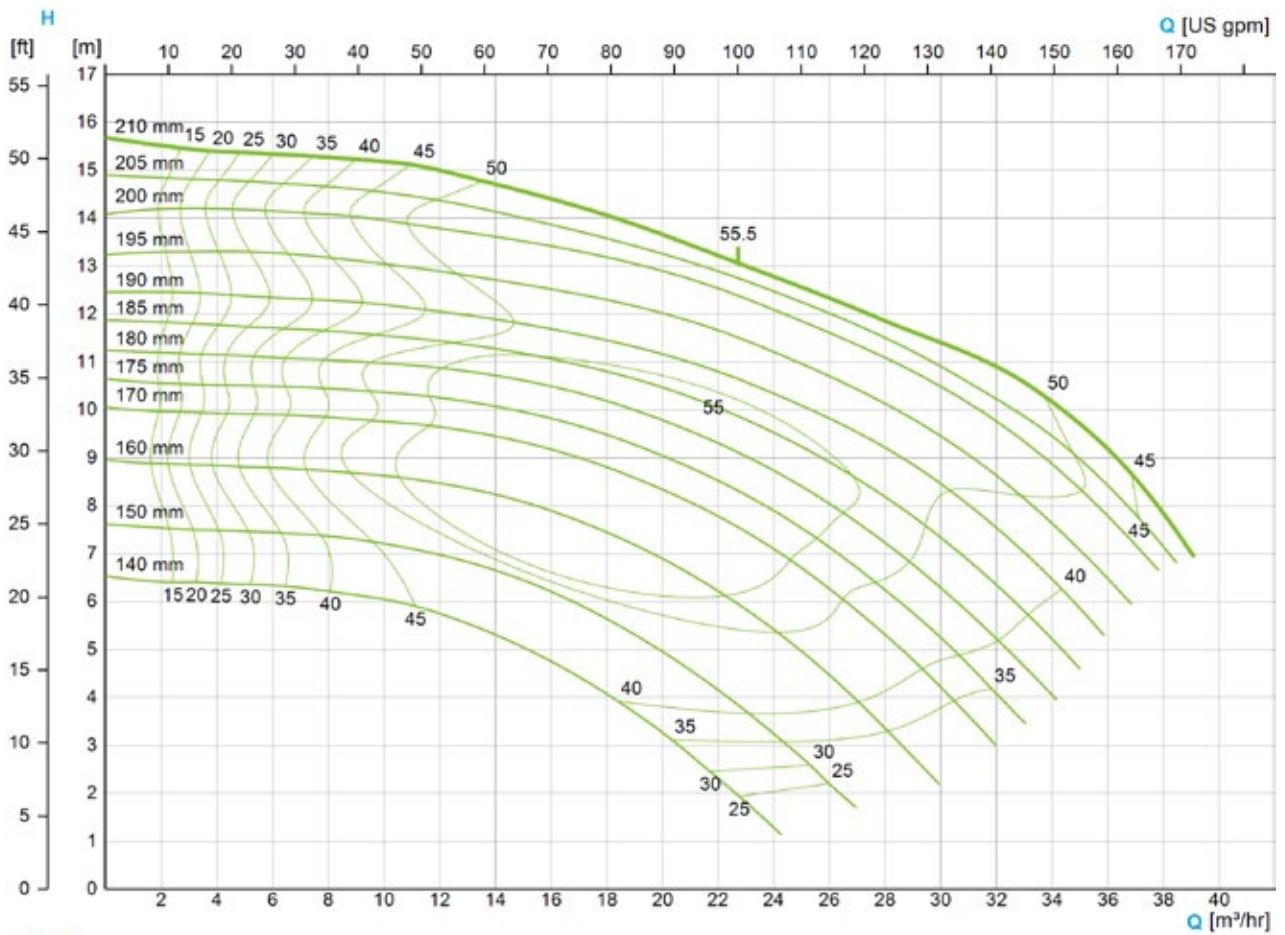

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 40 m³/h (176 US gpm)
Pump head	Max. 17 m (56 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

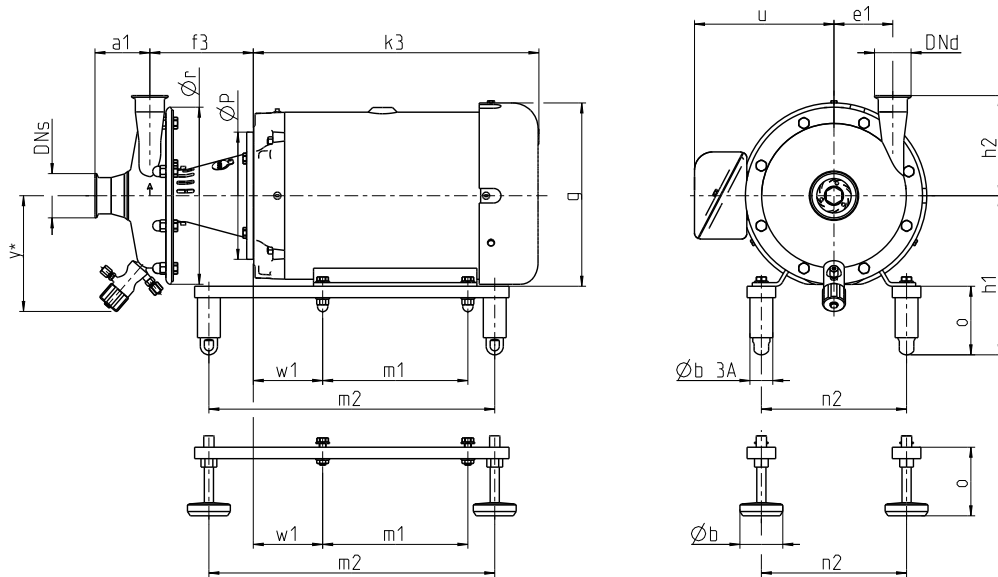

e1 = 4.51 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	153.00
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	145.00
213TC	7.50	15.52	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	151.00
215TC	10.00	15.91	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	175.00


Connections

DNs 3" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.30	9.11	9.33	9.16	10.92	9.75	9.12	9.30	10.32

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

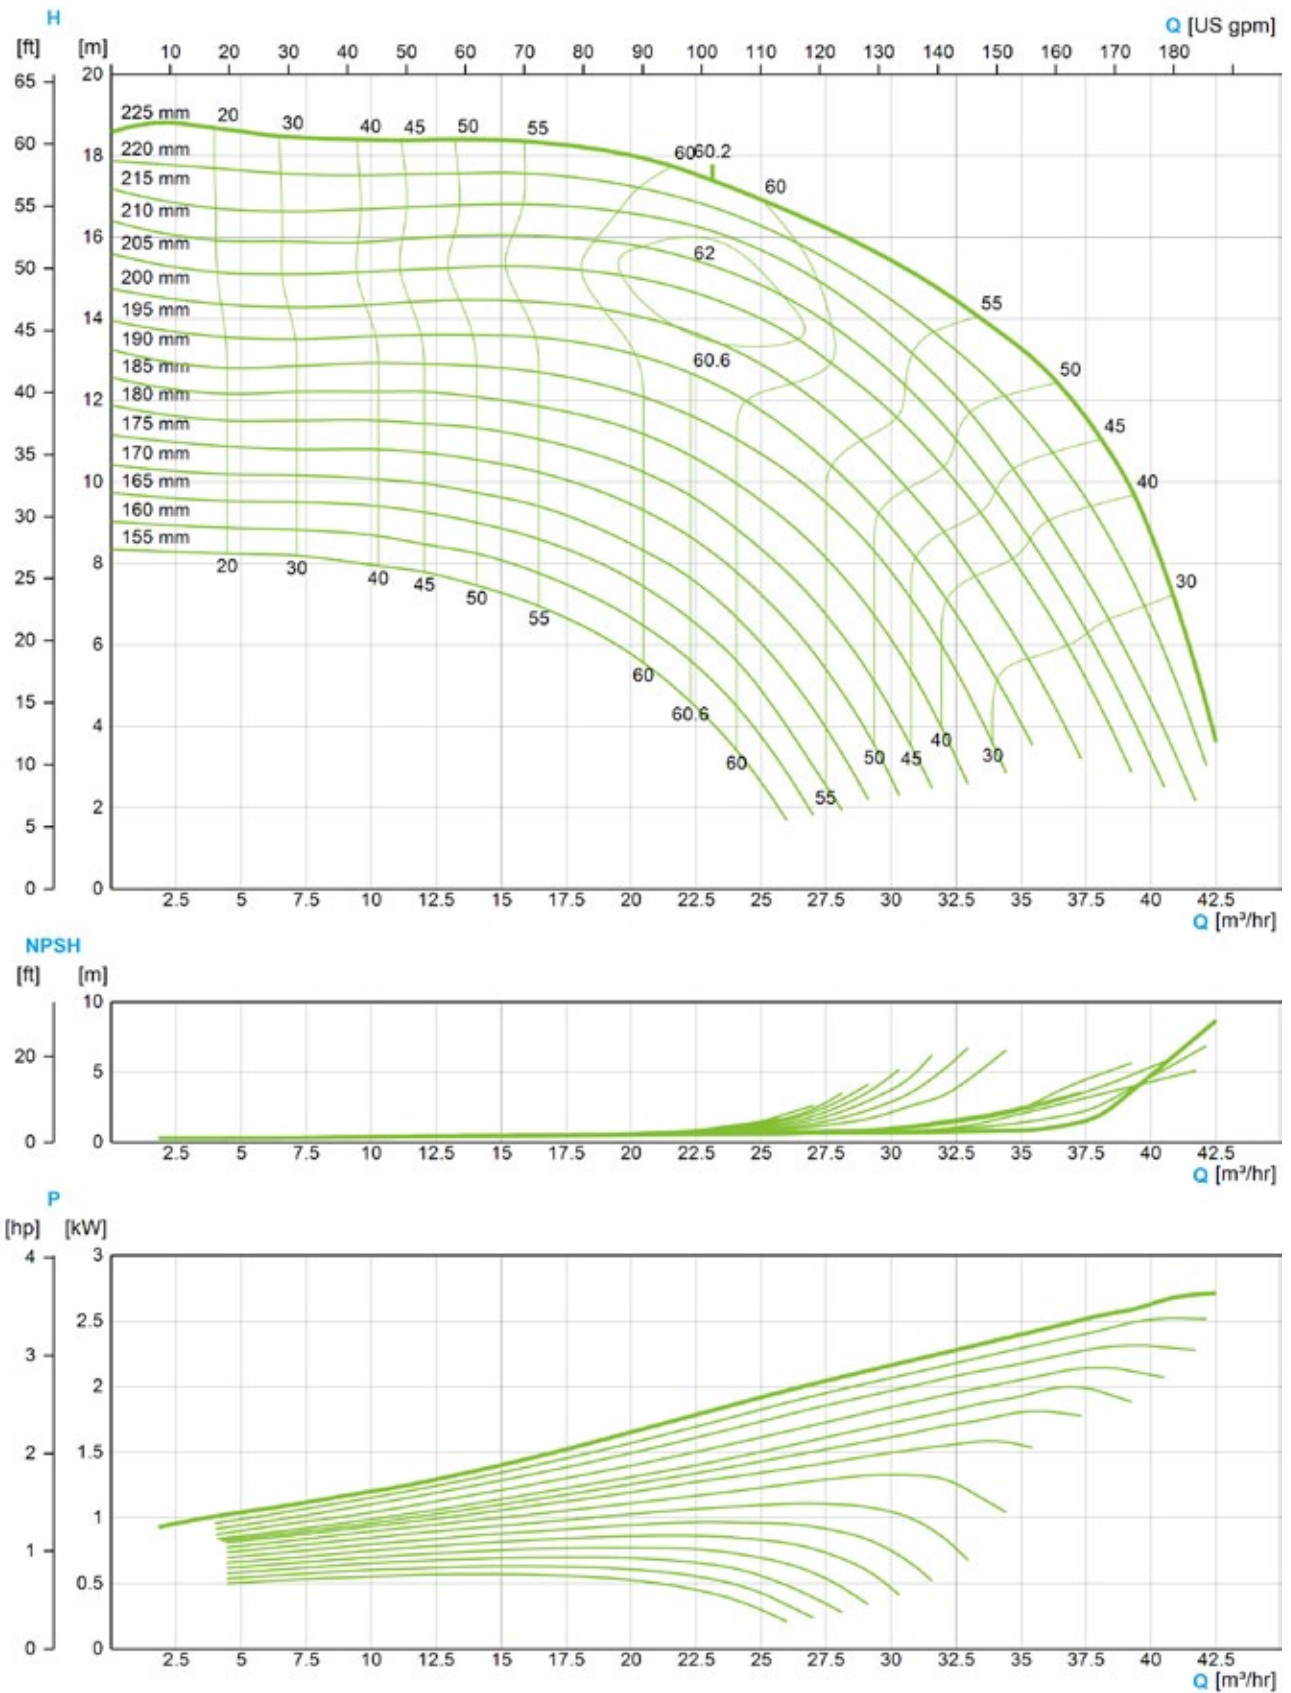

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2 1/2"; 3", pressure side 2"; 2 1/2"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 55 m ³ /h (242 US gpm)
Pump head	Max. 19 m (62 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

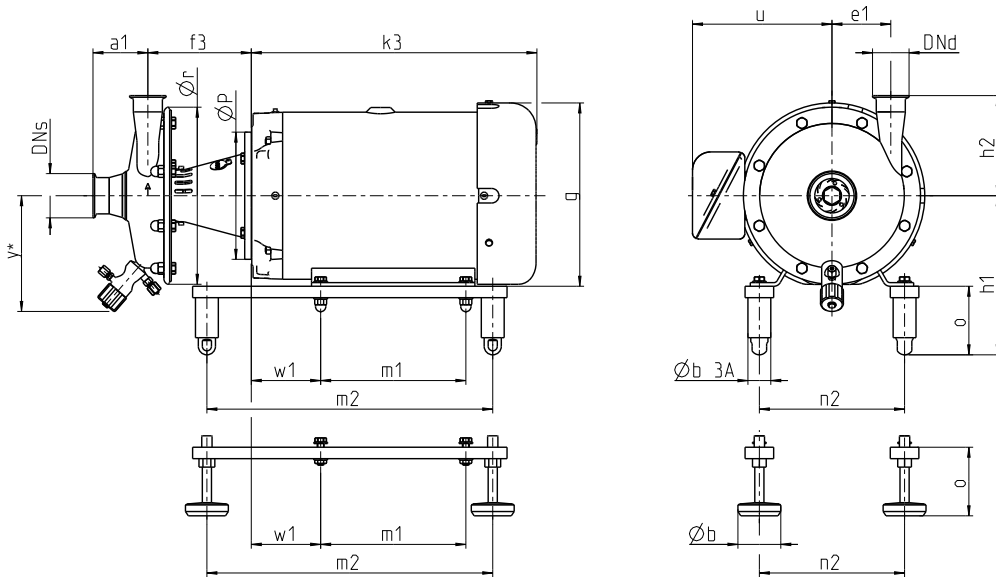

e1 = 4.33 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	153.00
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	145.00
213TC	7.50	15.52	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	151.00
215TC	10.00	15.91	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	175.00




Connections

DNs 3" OD DNd 2 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.08	8.90	9.12	8.94	10.71	9.53	8.90	9.09	10.11

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

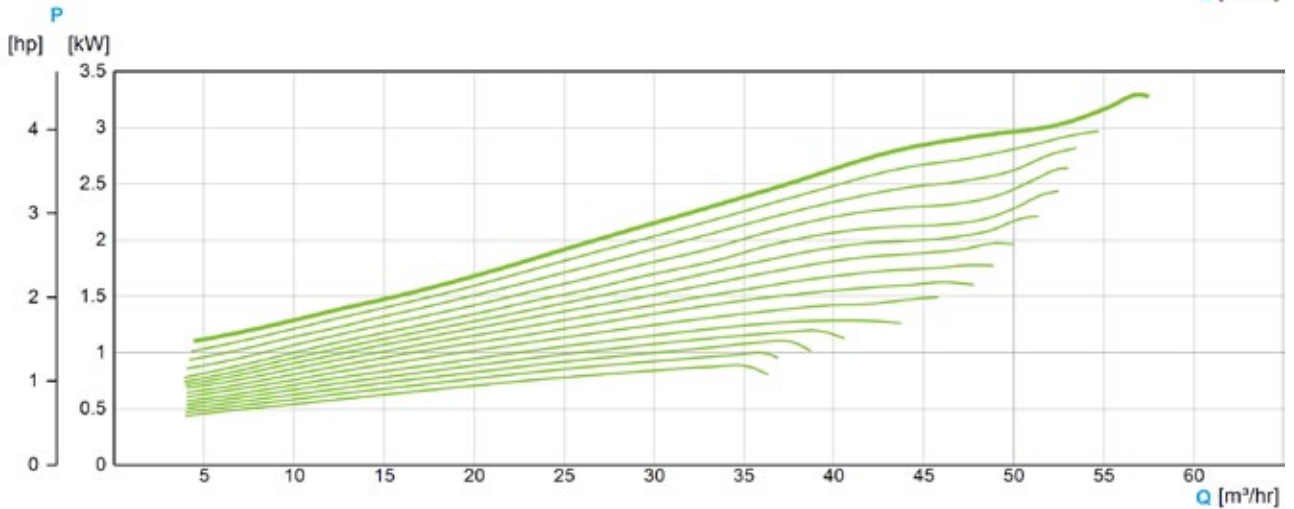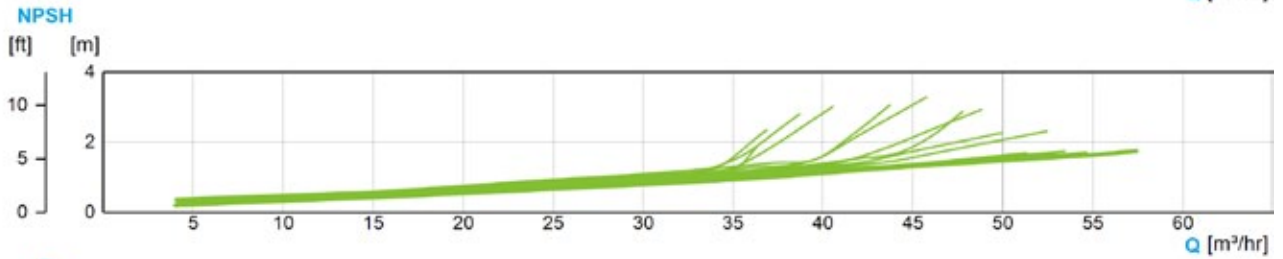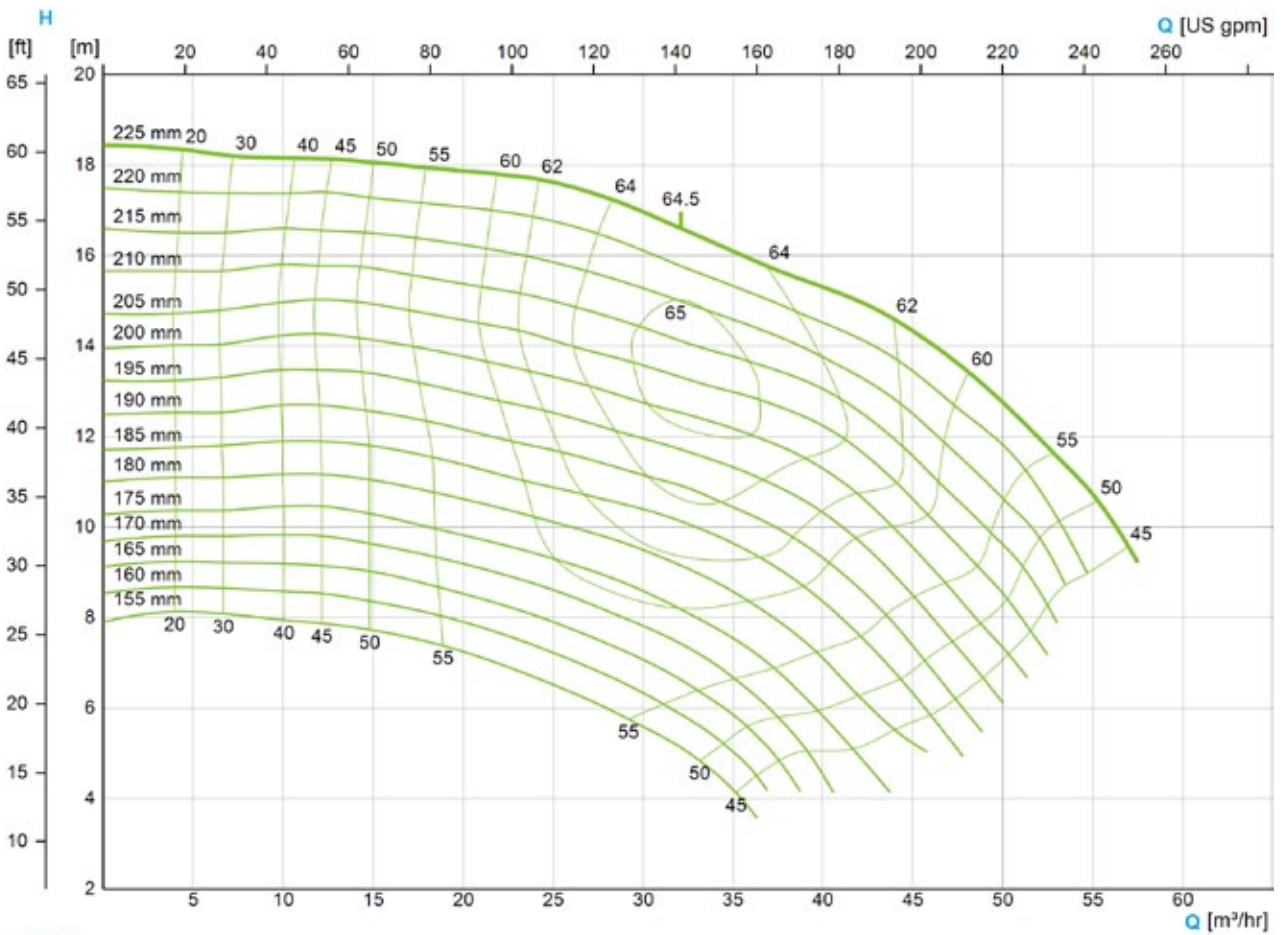

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 3"; 4", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 65 m³/h (286 US gpm)
Pump head	Max. 14 m (46 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

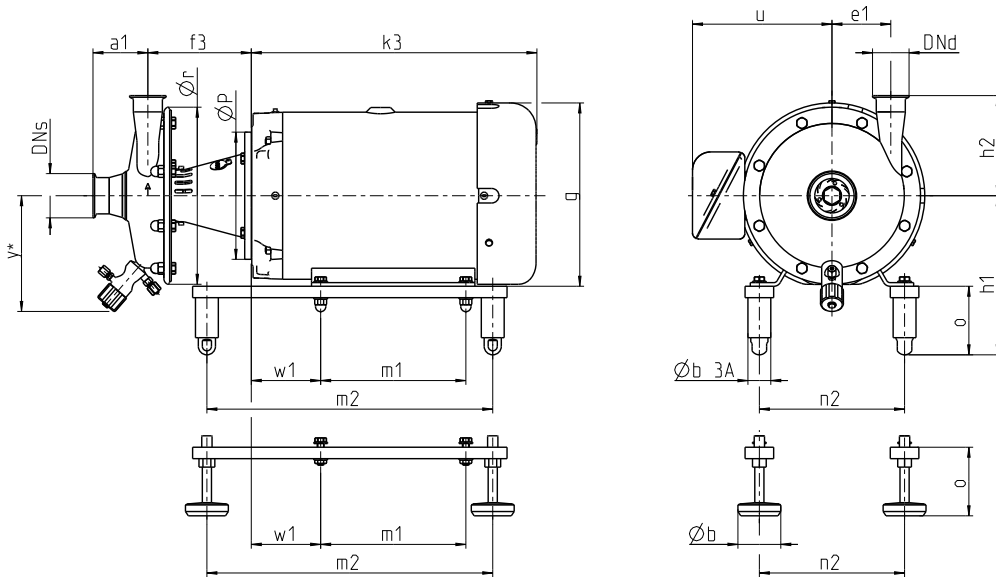

e1 = 4.49 inch
Ør = 17.01 inch
Y* = 8.50 inch




Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.12	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	189.00
184TC	5.00	15.16	6.12	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	190.00
213TC	7.50	15.52	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	186.00
215TC	10.00	15.91	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	216.00

Connections									
DNs 4" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	4.76	4.64	4.80	4.63	6.64	5.77	5.02	4.77	5.79
h2	9.83	9.65	9.87	9.69	11.46	10.28	9.65	9.84	10.86

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

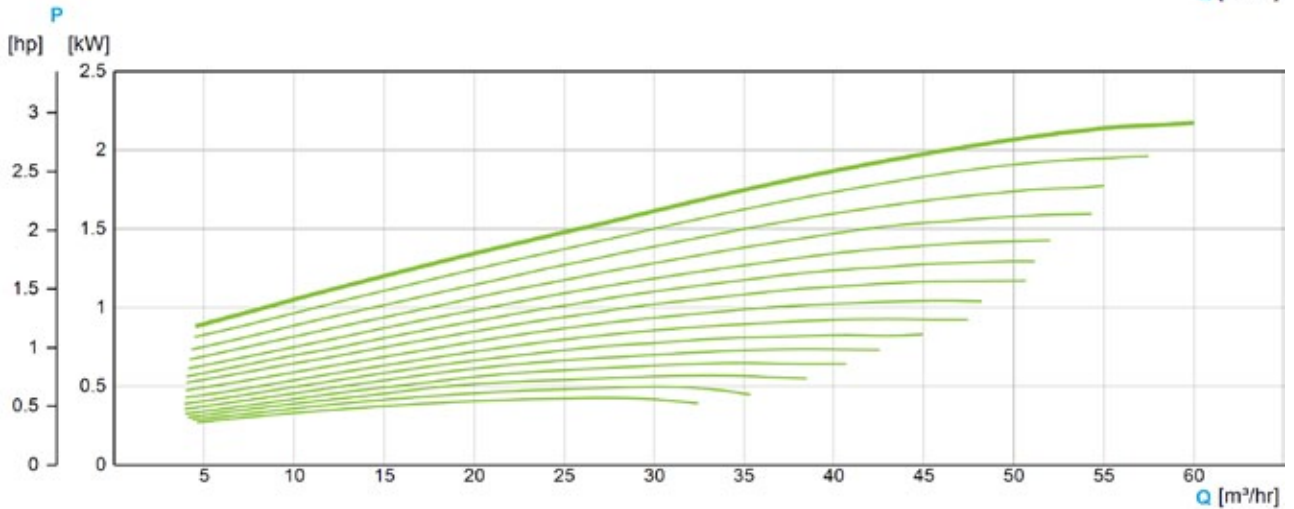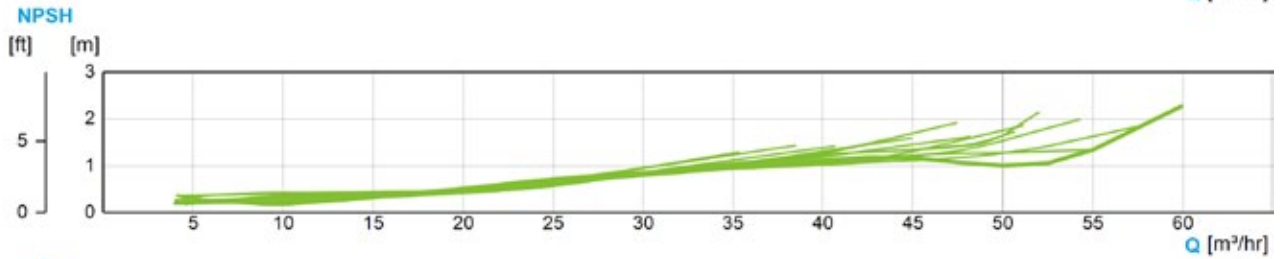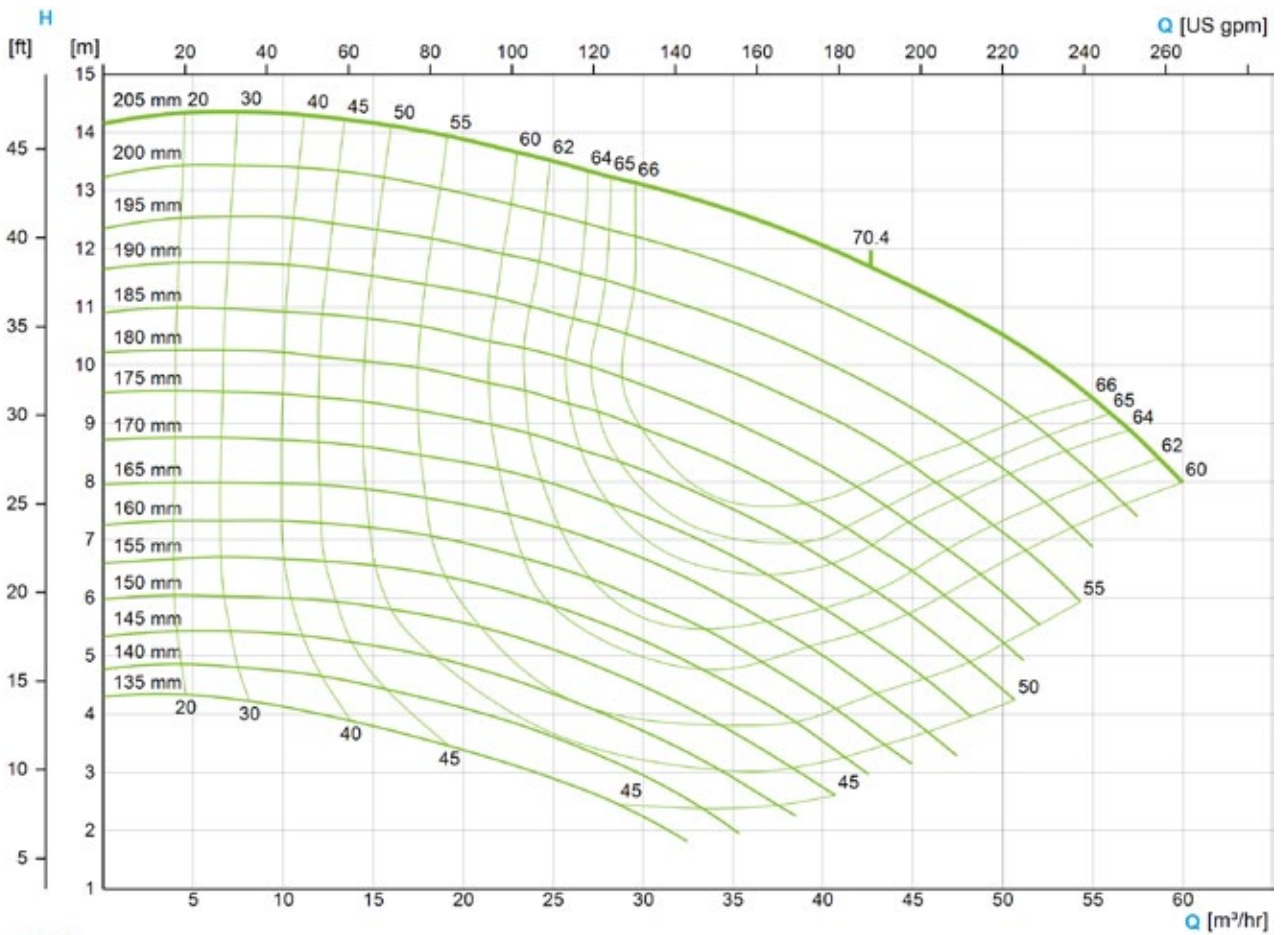

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 3"; 4", pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 65 m³/h (286 US gpm)
Pump head	Max. 23 m (75 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

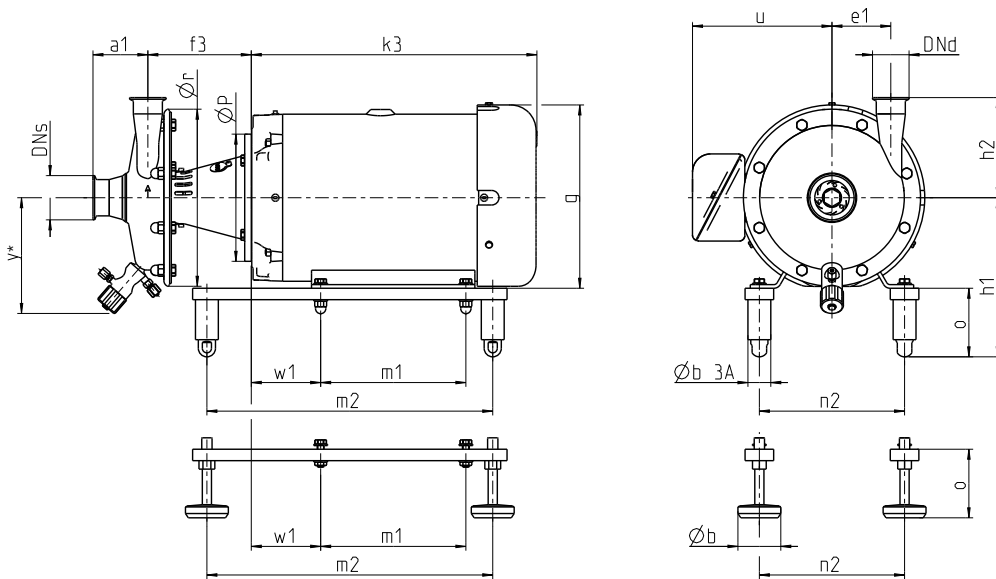

e1 = 4.88 inch
Ør = 14.13 inch
Y* = 8.82 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.42	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	138.00
213TC	7.50	15.52	6.42	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	157.00
215TC	10.00	15.91	6.42	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	189.00


Connections

DNs 4" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	4.70	4.58	4.74	4.57	6.58	5.71	4.96	4.71	5.73
h2	9.92	9.74	9.96	9.78	11.55	10.37	9.74	9.93	10.95

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)


Weight: net-weight without packaging

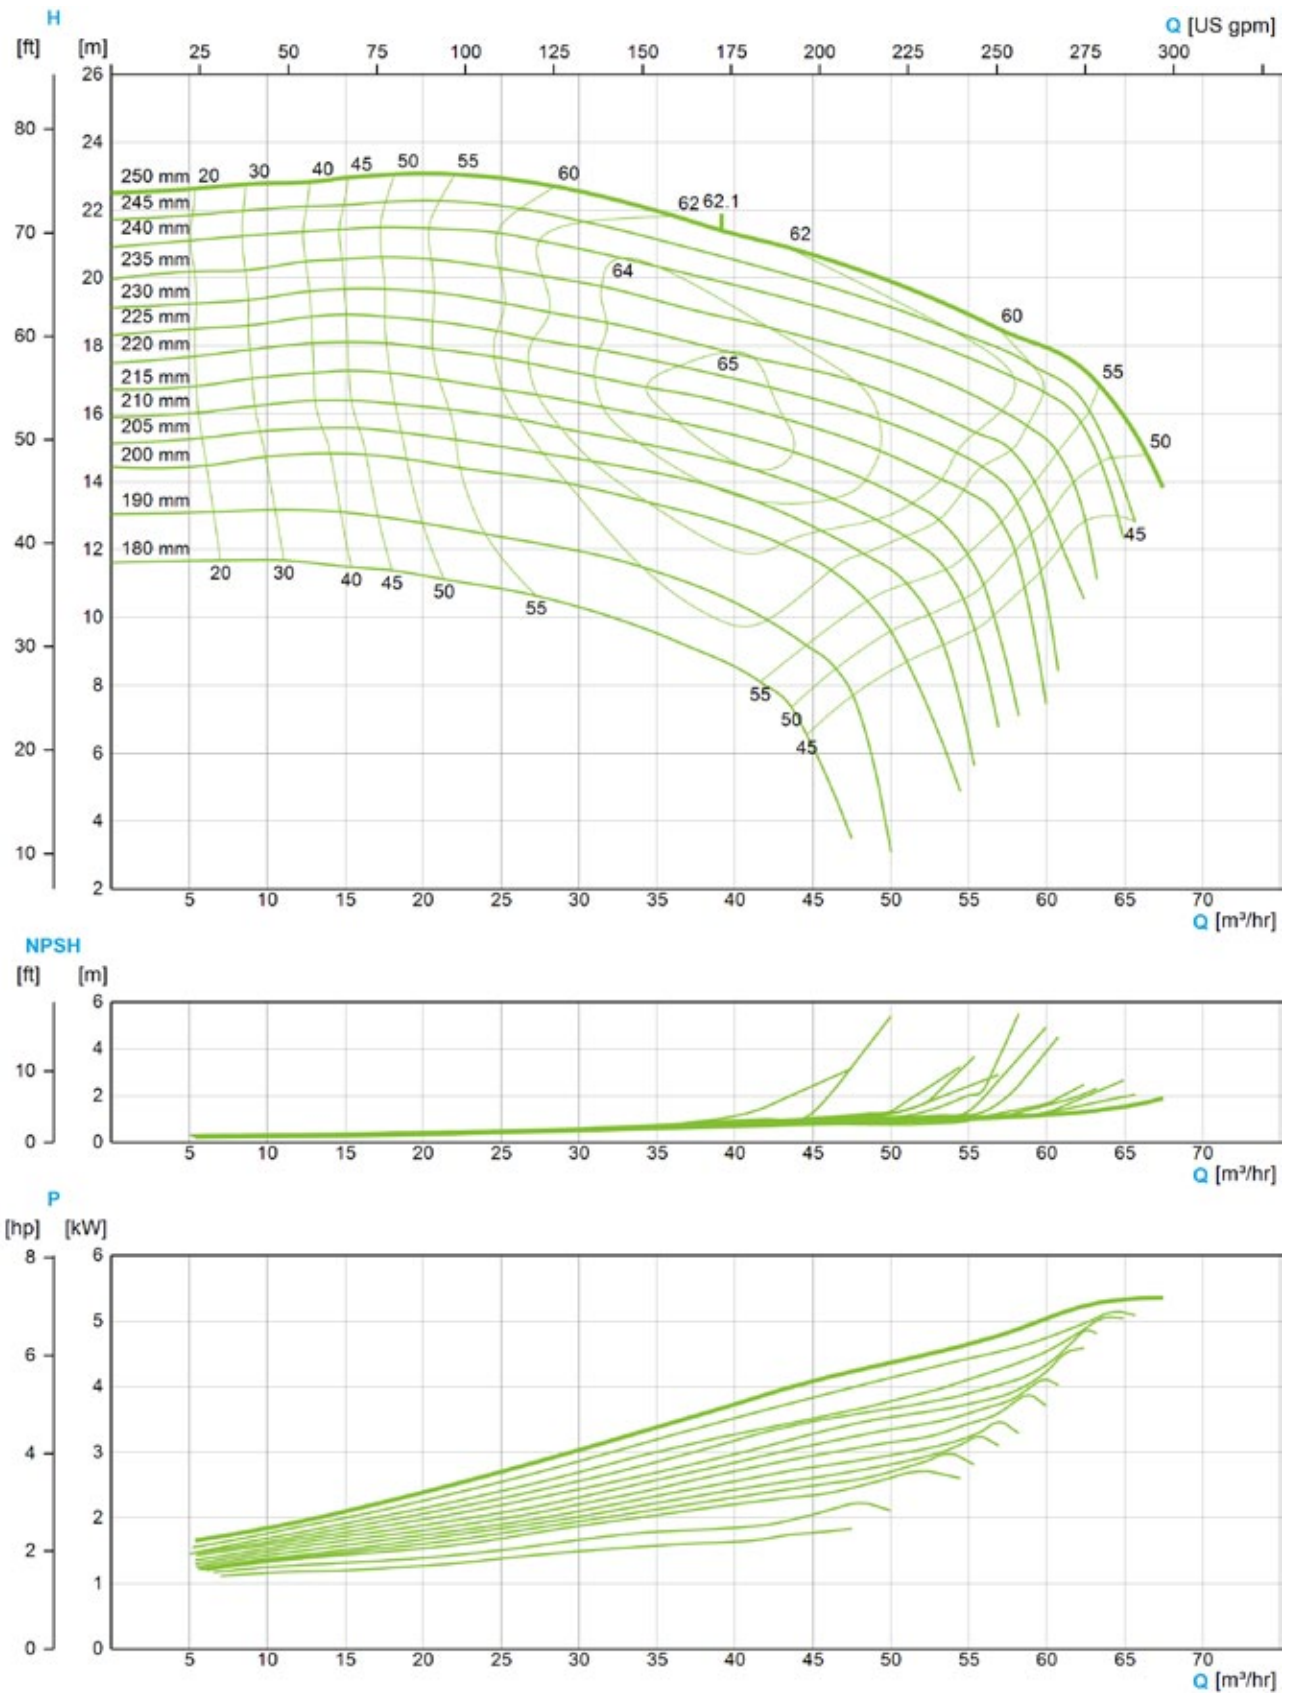


The flow charts are based on water, temperature 59 °F



Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 4", pressure side 4"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 100 m ³ /h (440 US gpm)
Pump head	Max. 12 m (39 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	

Further options see page 150 (Composition of Order Code)

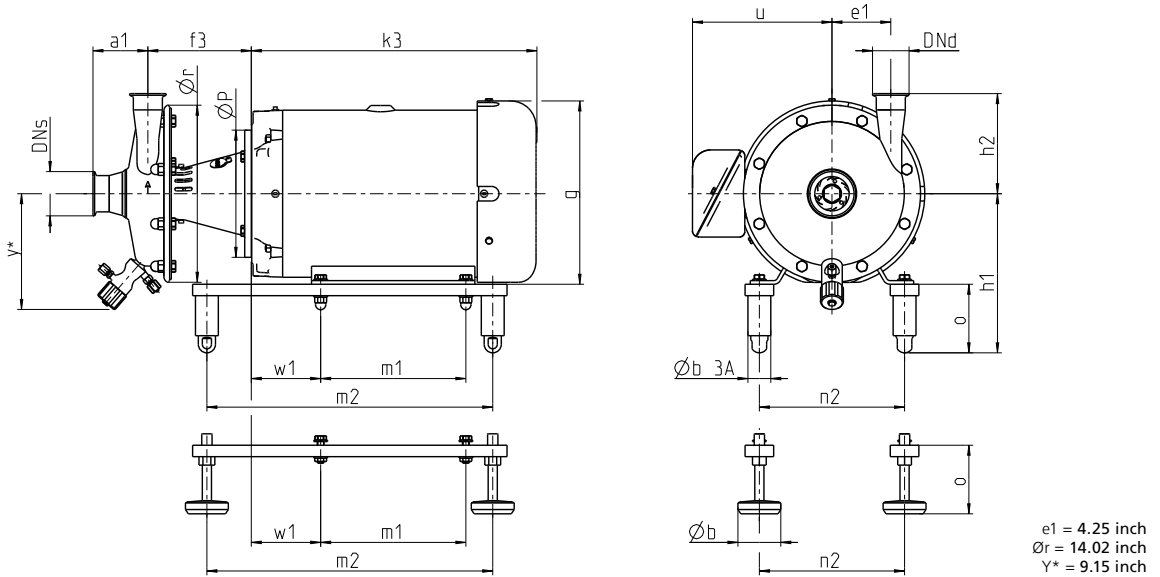


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.15	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	167.00
184TC	5.00	15.16	6.15	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	159.00
213TC	7.50	15.52	6.15	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	165.00
215TC	10.00	15.91	6.15	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	197.00

Connections									
DNs 4" OD DNd 4" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	7.29	7.17	7.51	7.15	9.17	8.29	7.54	7.30	8.32
h2	11.72	11.60	11.94	11.58	13.60	12.72	11.98	11.73	12.75

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

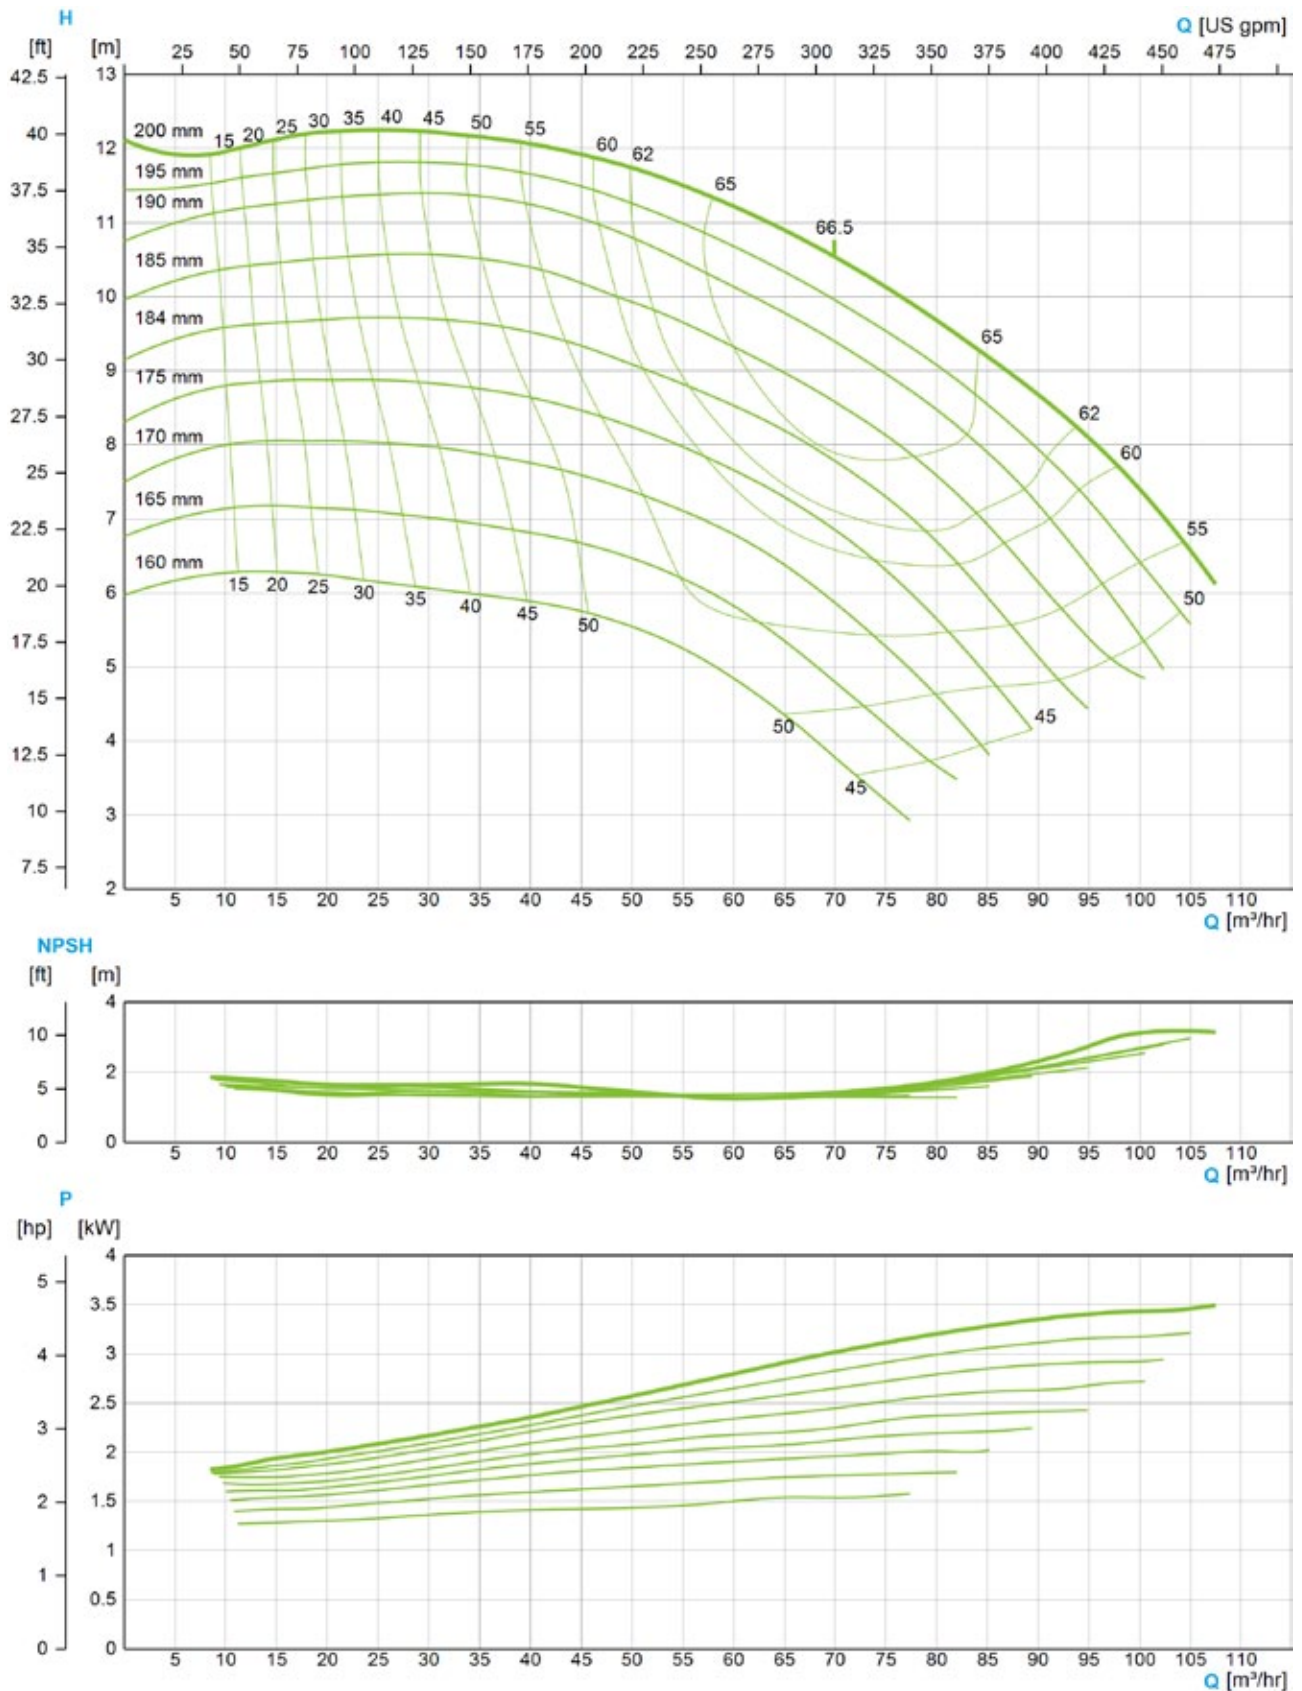

The flow charts are based on water, temperature 59 °F





**GEA Hilge TP
2-pole
60 Hz**

GEA Hilge TP 1020

GEA Hilge TP 1540

GEA Hilge TP 2030

GEA Hilge TP 2050

GEA Hilge TP 2575

GEA Hilge TP 3050

GEA Hilge TP 5060

GEA Hilge TP 7060

GEA Hilge TP 8050

GEA Hilge TP 8080

GEA Hilge TP 16040




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2", Pressure side 1 1/2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 24 m ³ /h (106 US gpm)
Pump head	Max. 34 m (112 ft)
Housing pressure	Max. 10 bar (145 psi)
Certificates	




Further options see page 150 (Composition of Order Code)

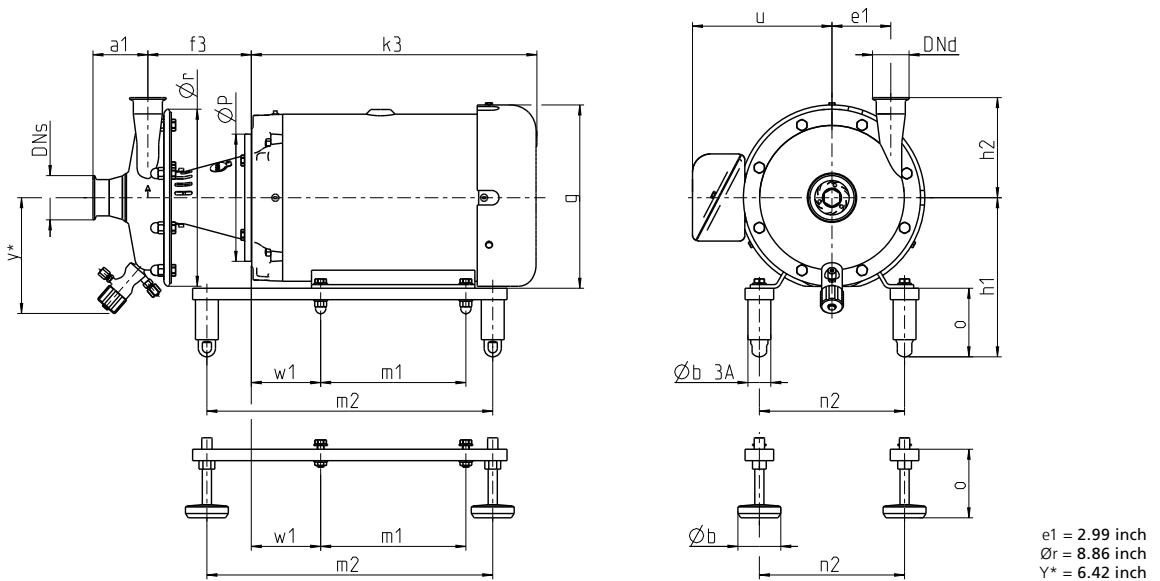

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	67.00
143TC	1.50	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	75.00
145TC	2.00	11.73	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	77.00
182TC	3.00	13.59	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	100.00
184TC	5.00	15.16	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	120.00
213TC	7.50	16.70	7.06	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	211.00

Connections										
DNs 2" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.43	2.12	2.34	2.30	3.81	3.20	2.10	2.31	3.46	
h2	5.82	5.26	5.64	5.68	7.14	6.00	5.48	5.70	6.85	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

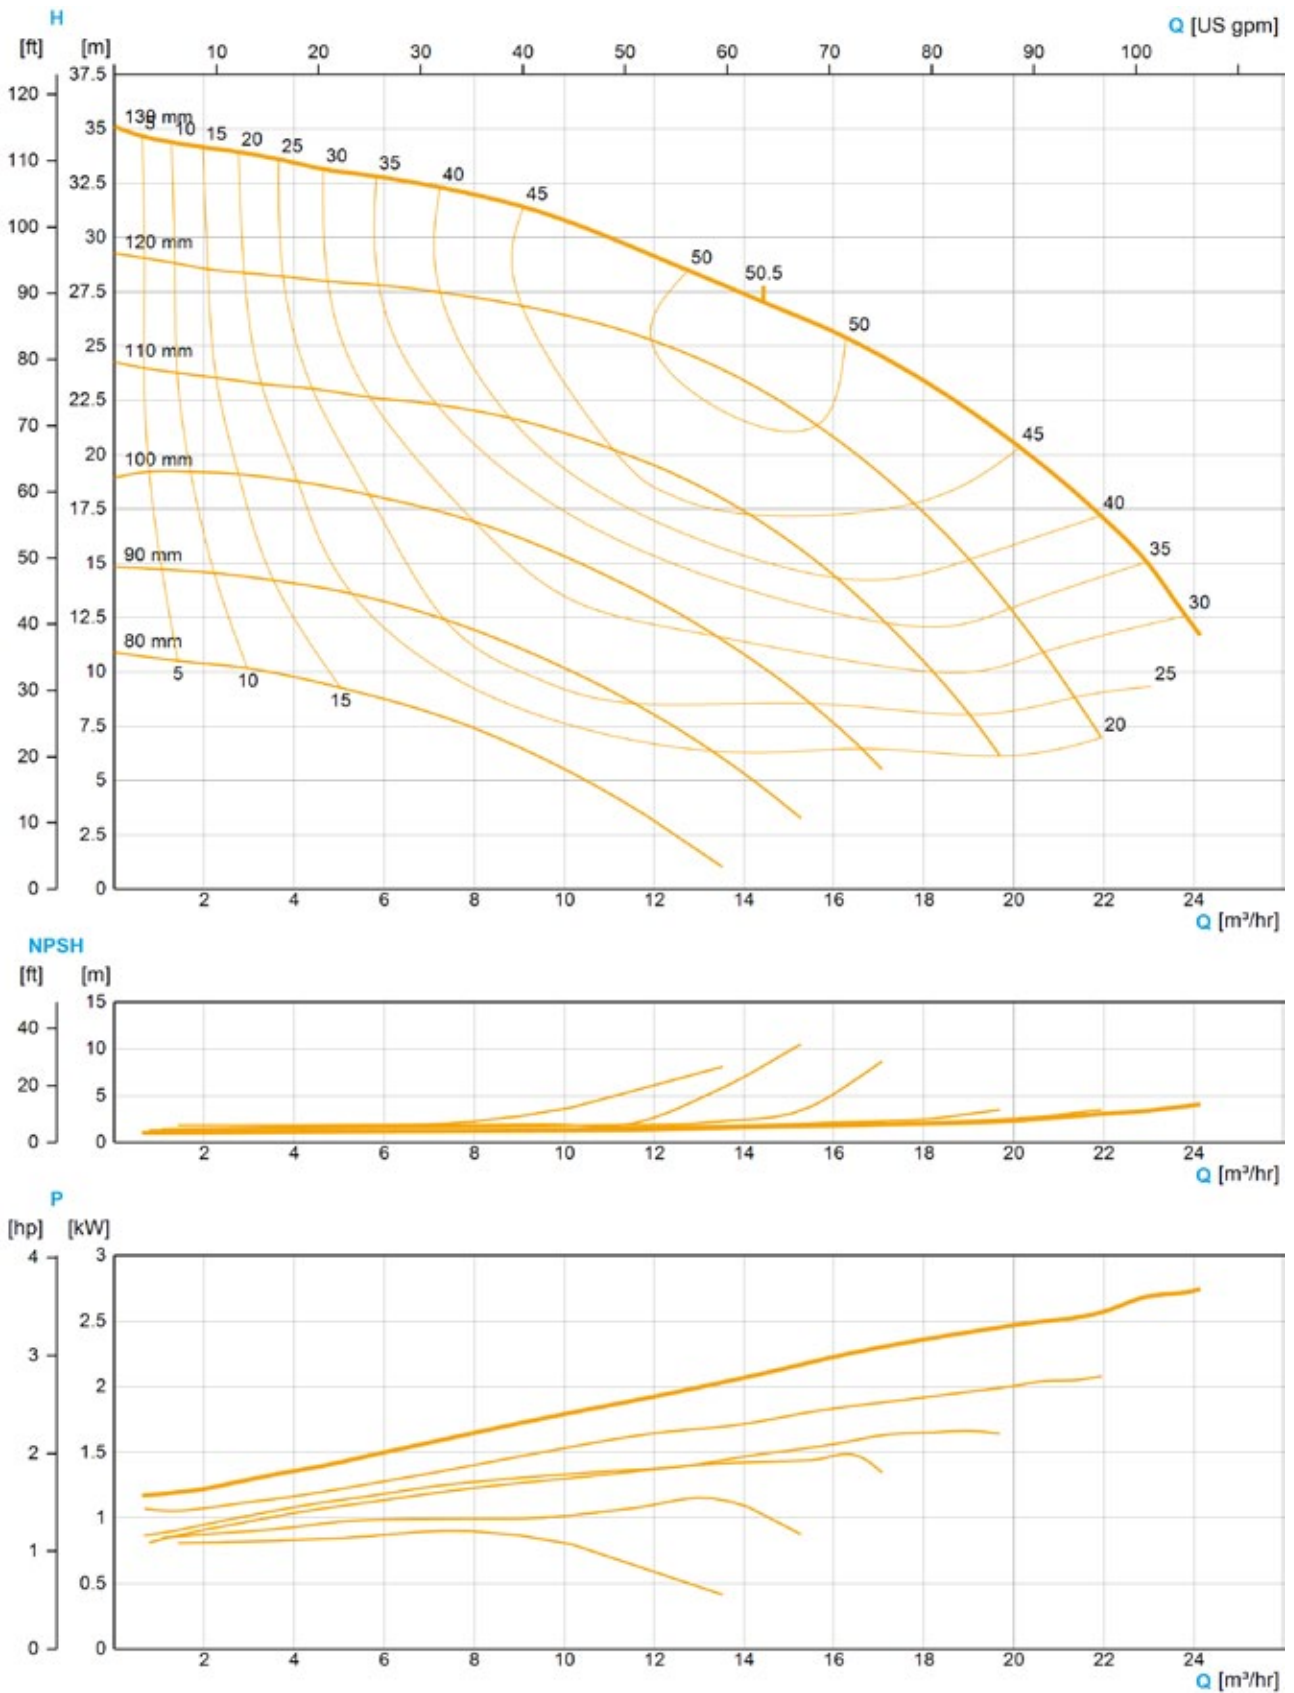

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2 1/2"; 3", Pressure side 1 1/2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 44 m³/h (194 US gpm)
Pump head	Max. 62 m (203 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	




Further options see page 150 (Composition of Order Code)

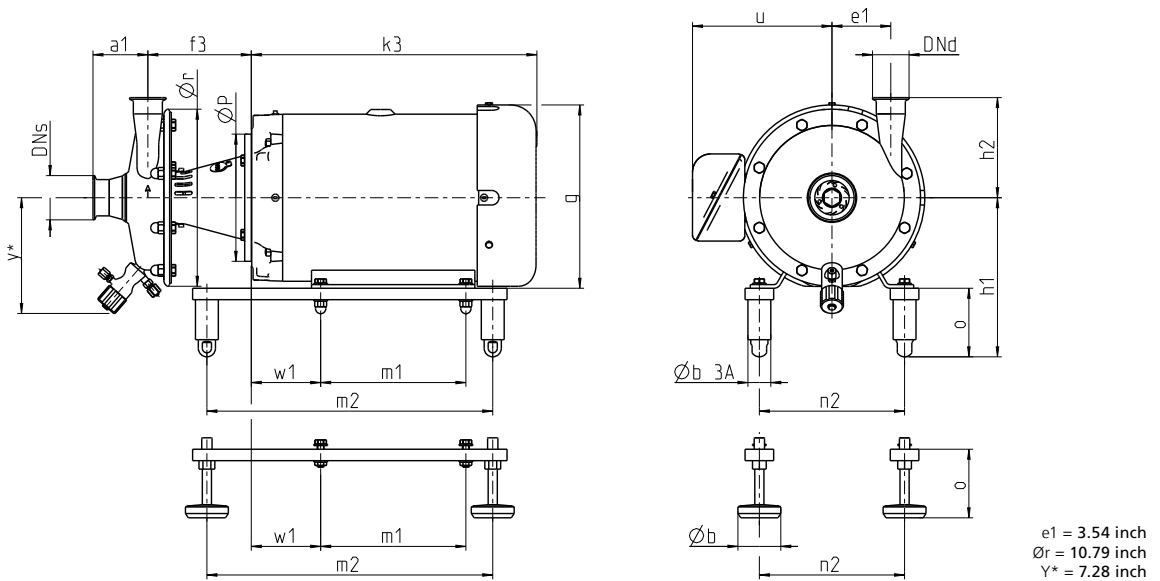

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	86.00
182TC	3.00	13.59	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	109.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	129.00
213TC	7.50	16.70	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	200.00
215TC	10.00	18.27	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	229.00
254TC	15.00	18.56	6.79	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	241.00

Connections										
DNs 3" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.67	2.49	2.77	2.53	4.30	3.12	2.49	2.68	3.70	
h2	6.24	5.68	6.06	6.10	7.56	6.42	5.91	6.12	7.27	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

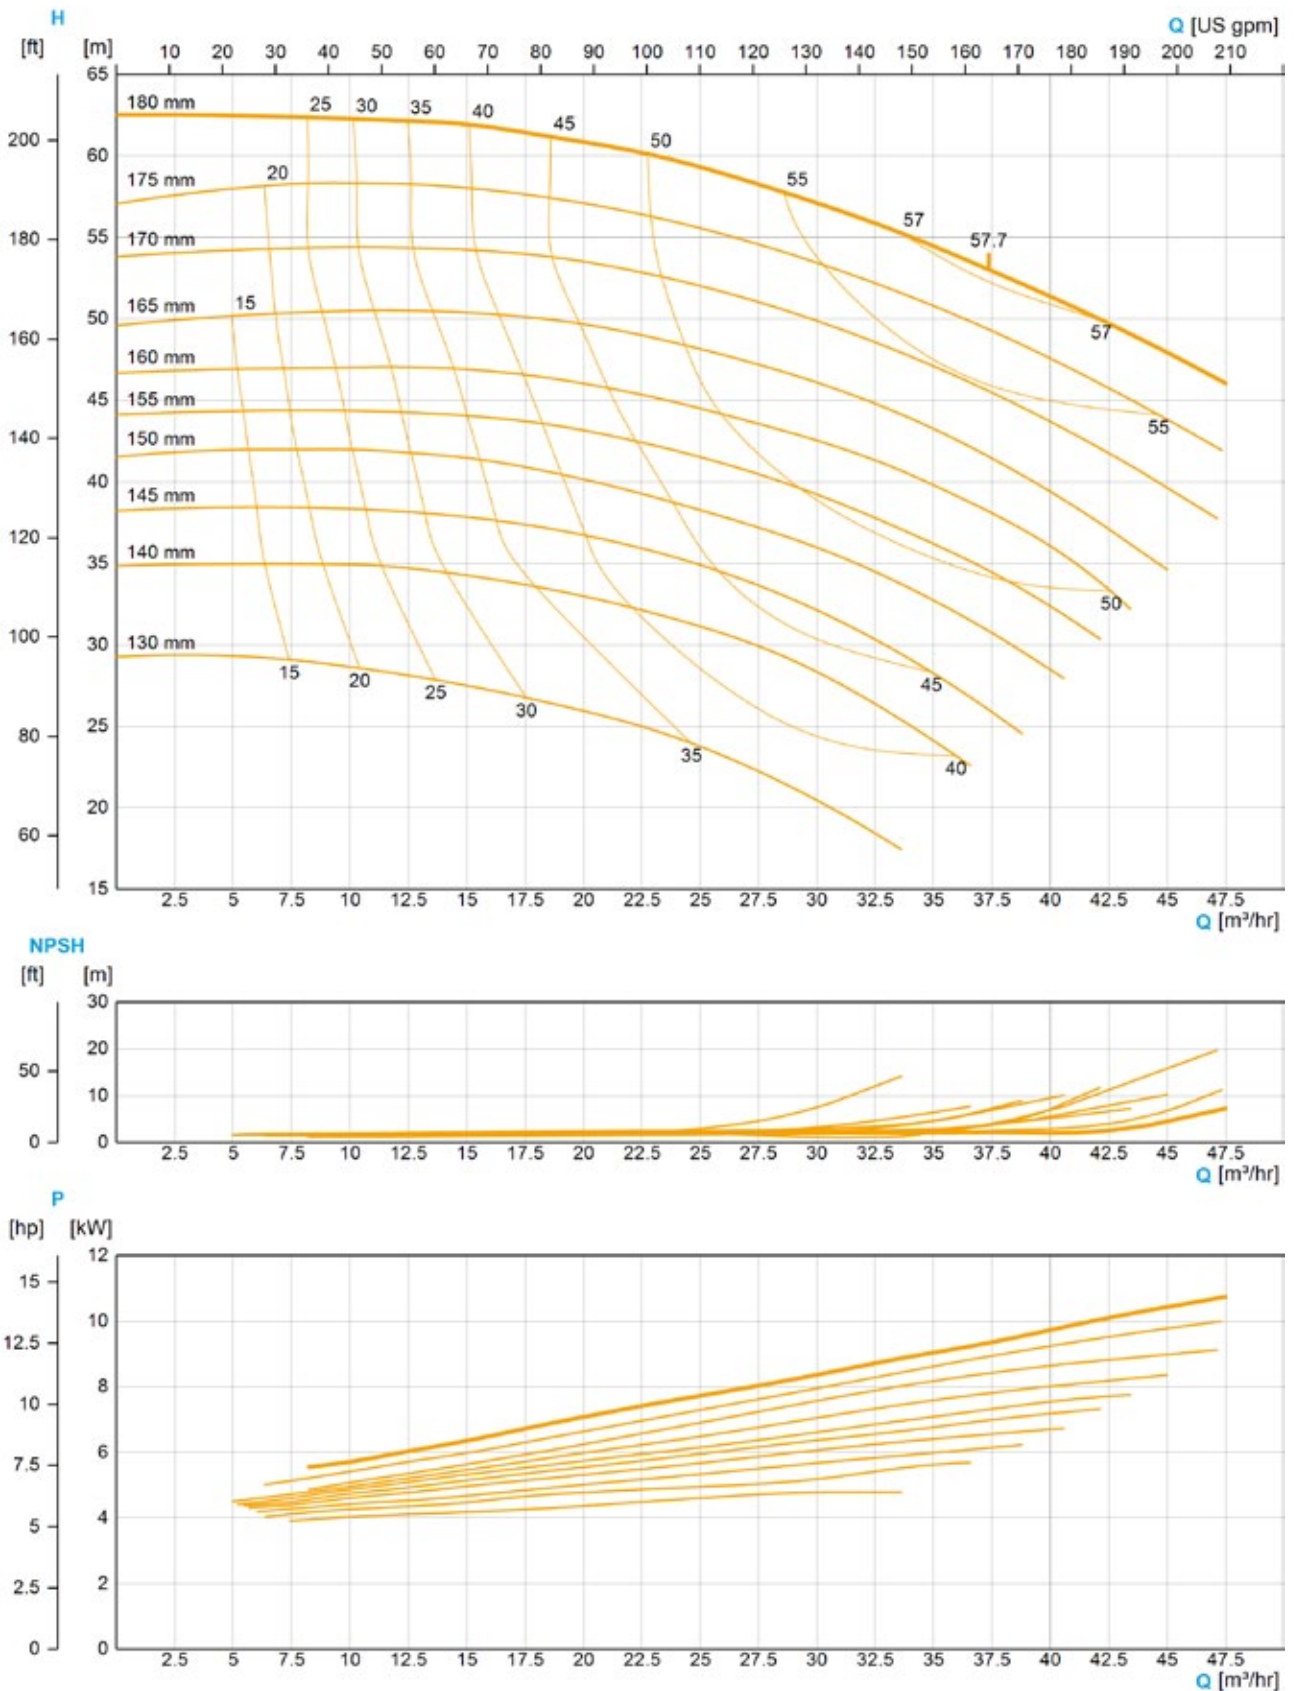

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2 1/2"; 3", Pressure side 1 1/2"; 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 44 m ³ /h (194 US gpm)
Pump head	Max. 52 m (171 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

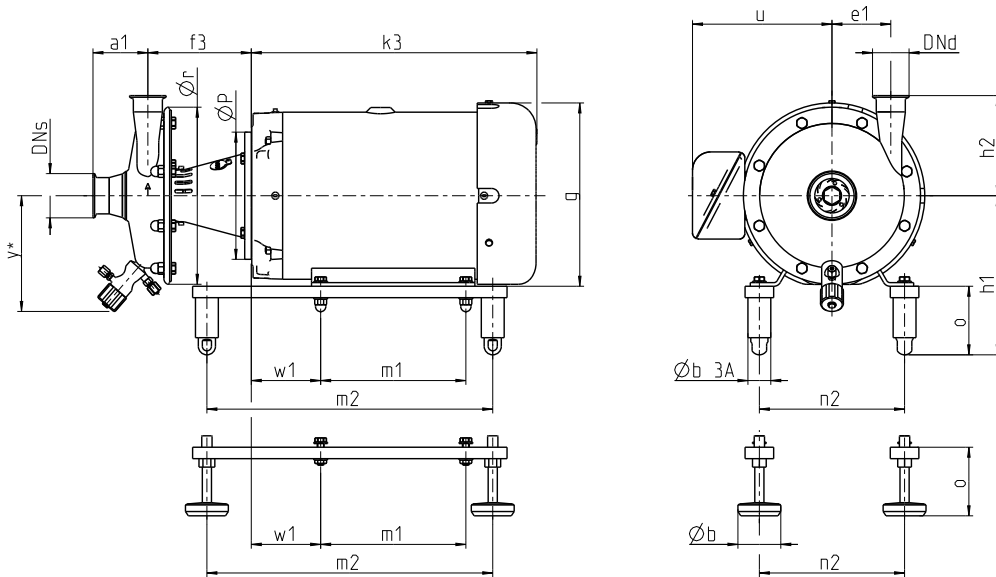

e1 = 3.35 inch
Ør = 10.20 inch
Y* = 7.09 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	83.00
182TC	3.00	13.59	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	106.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	123.00
213TC	7.50	16.70	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	177.00
215TC	10.00	18.27	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	206.00
254TC	15.00	18.56	6.80	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	238.00


Connections

DNs 2 1/2" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.55	2.37	2.59	2.41	4.18	3.00	2.37	2.56	3.58
h2	6.05	5.49	5.87	5.91	7.37	6.23	5.72	5.93	7.08

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

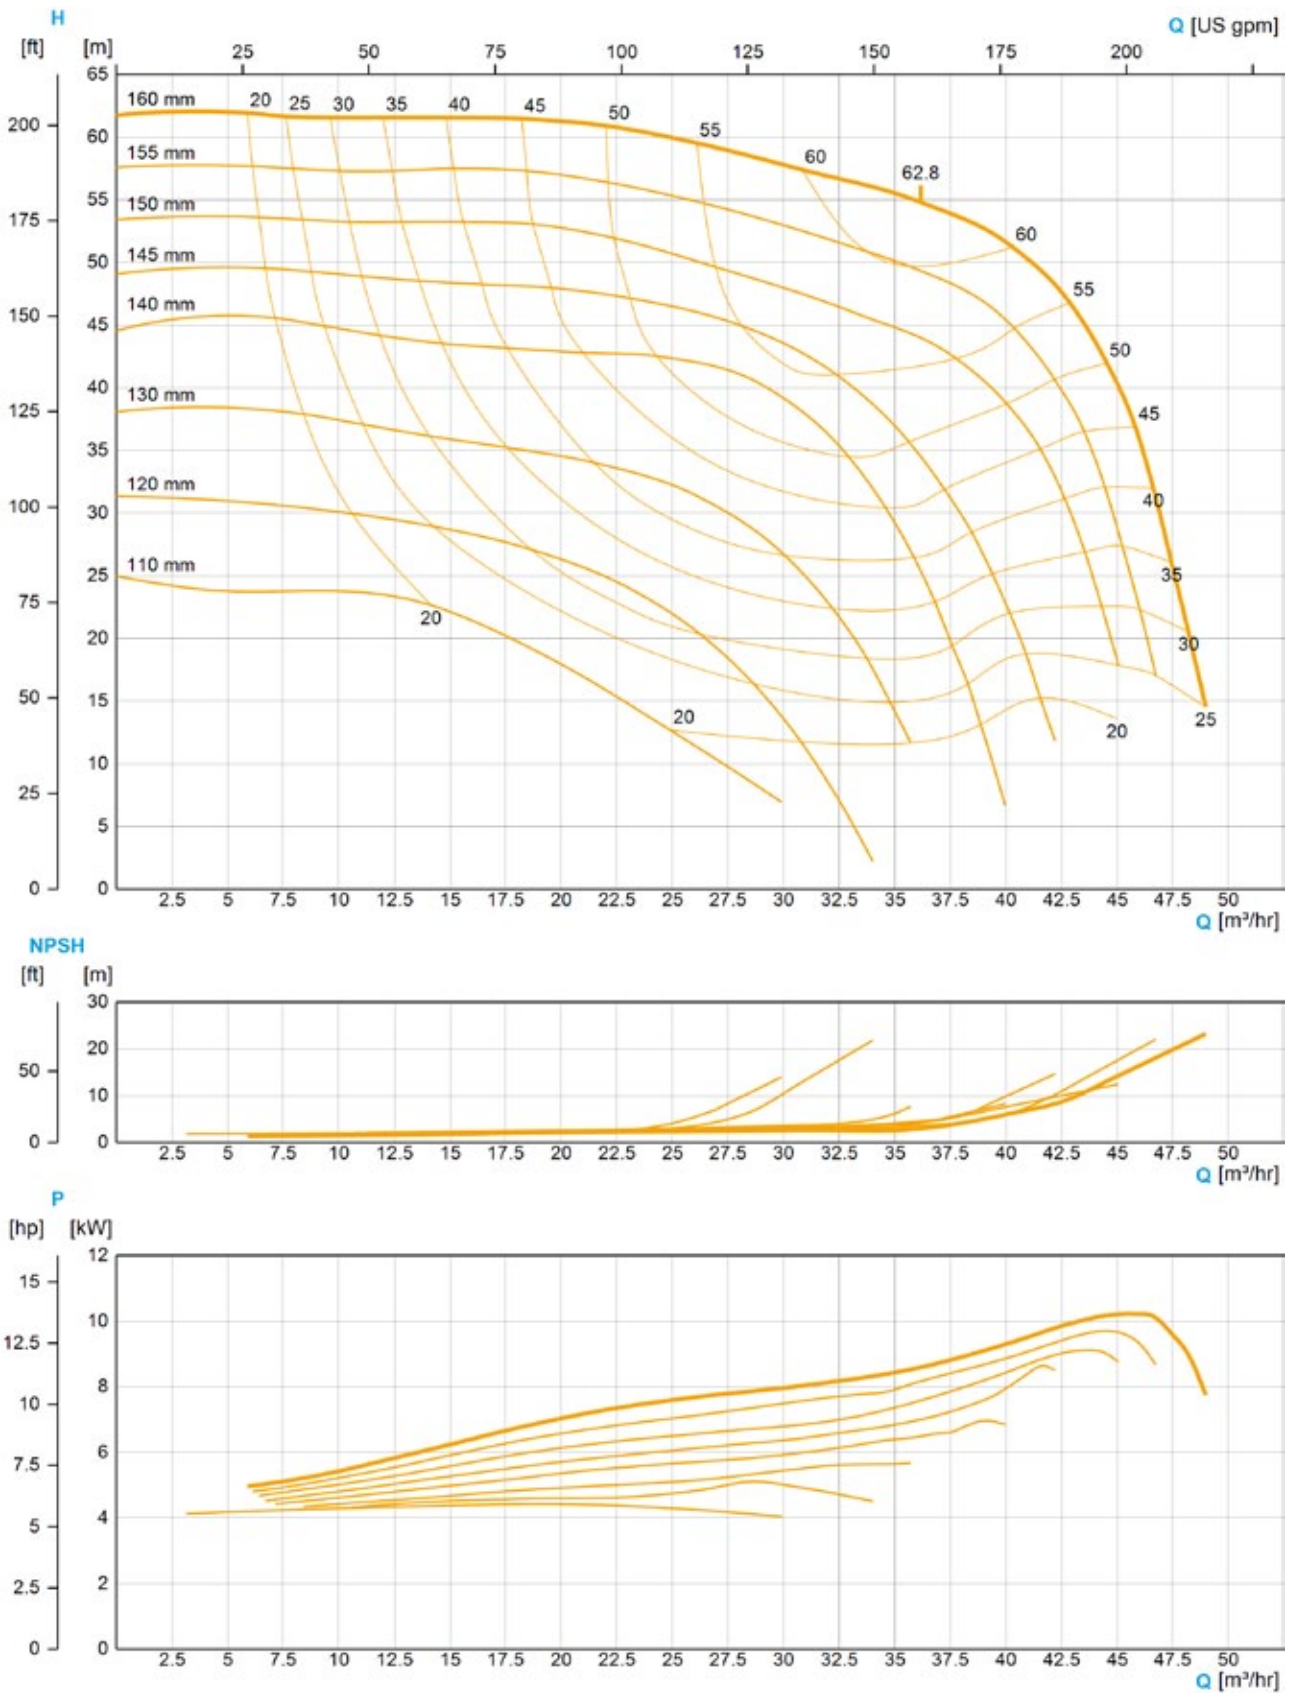

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2 1/2"; 3", Pressure side 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 42 m³/h (185 US gpm)
Pump head	Max. 85 m (279 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

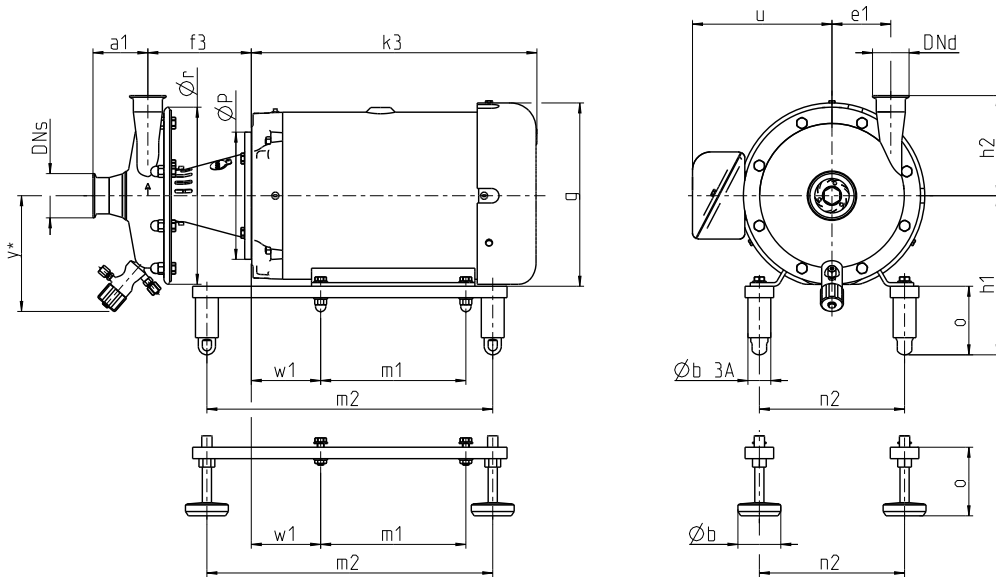

e1 = 4.21 inch
Ør = 12.17 inch
Y* = 7.95 inch


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.37	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	134.00
213TC	7.50	16.70	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	188.00
215TC	10.00	18.27	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	217.00
254TC	15.00	18.56	6.98	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	245.00
256TC	20.00	19.35	6.98	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	286.00

Connections									
DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.94	2.75	3.03	2.80	4.56	3.39	2.76	2.94	3.96
h2	7.19	6.87	7.09	7.05	8.56	7.44	6.85	7.19	8.21

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

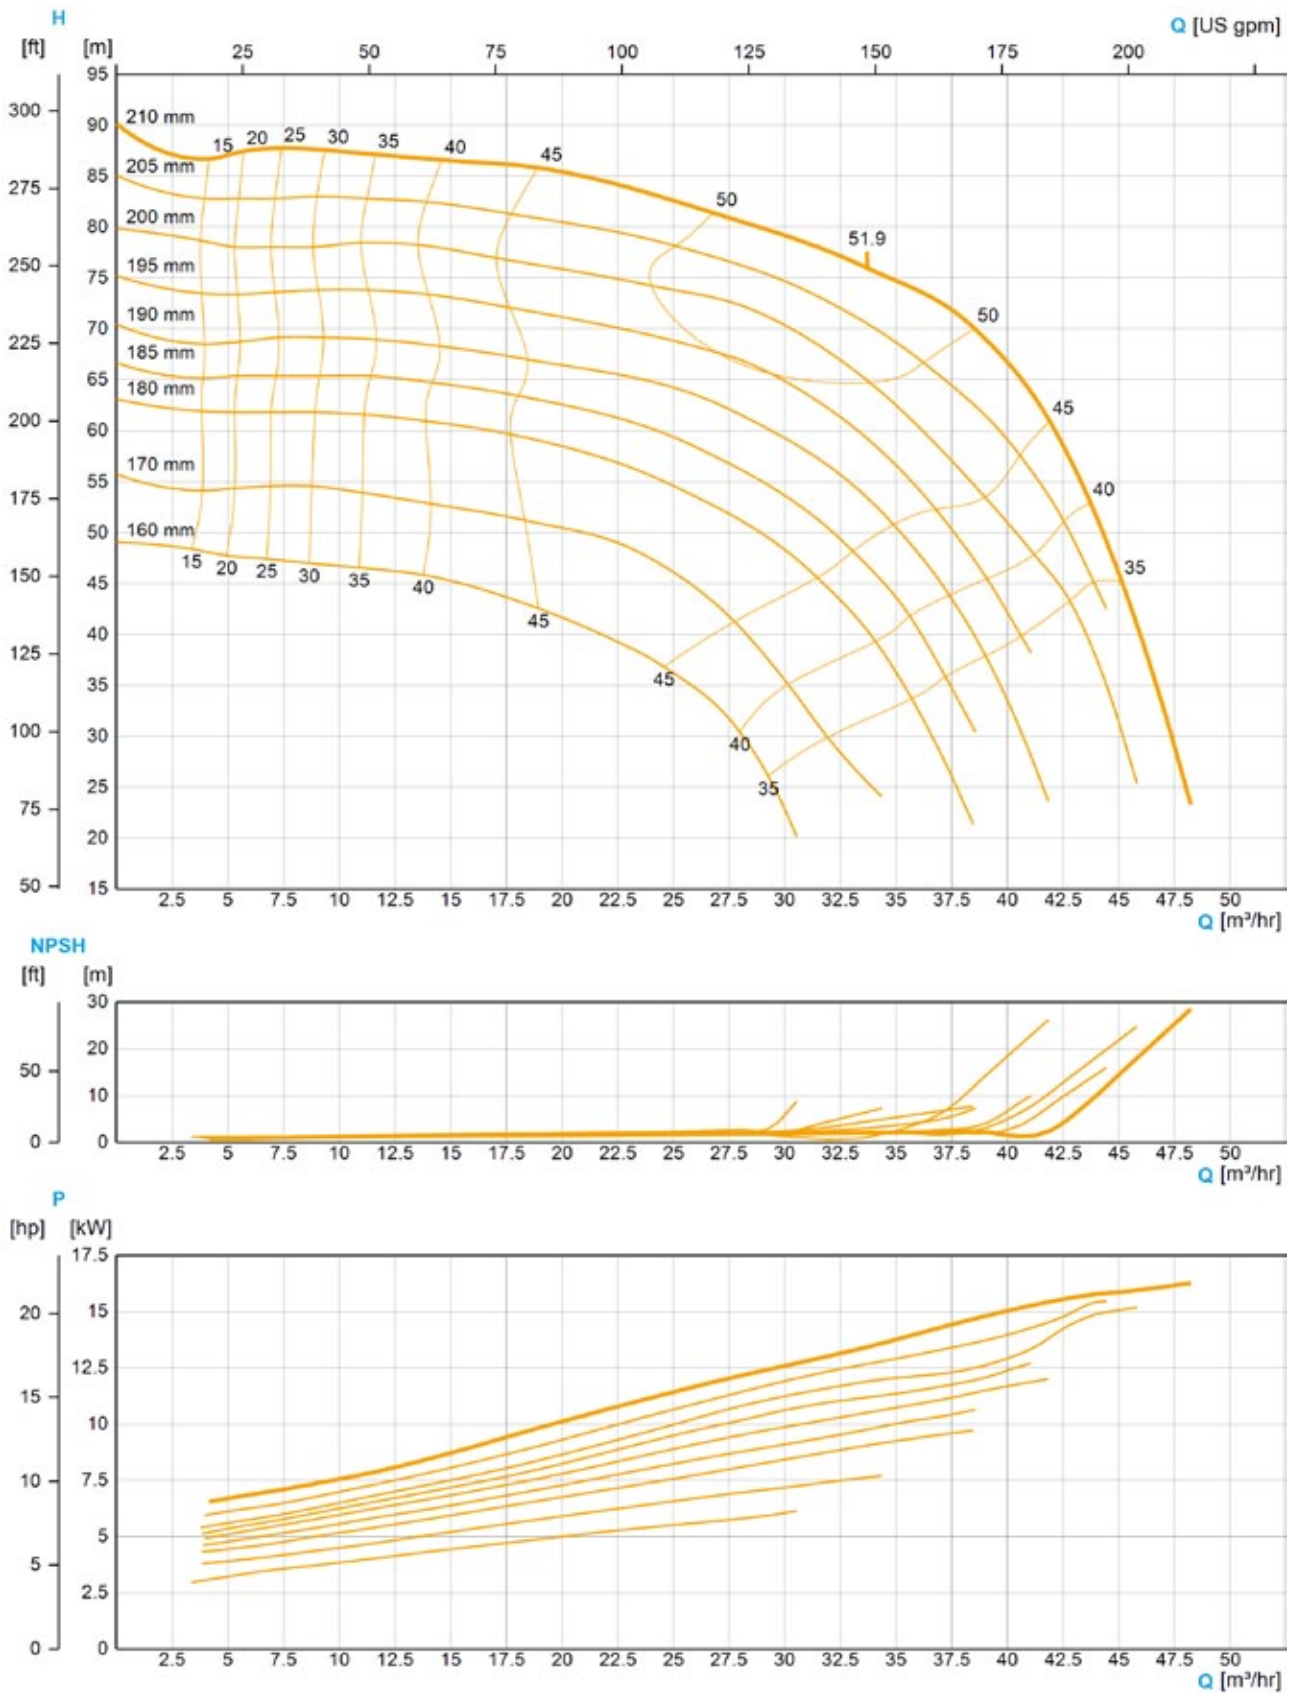

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", Pressure side 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 48 m³/h (211 US gpm)
Pump head	Max. 130 m (427 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

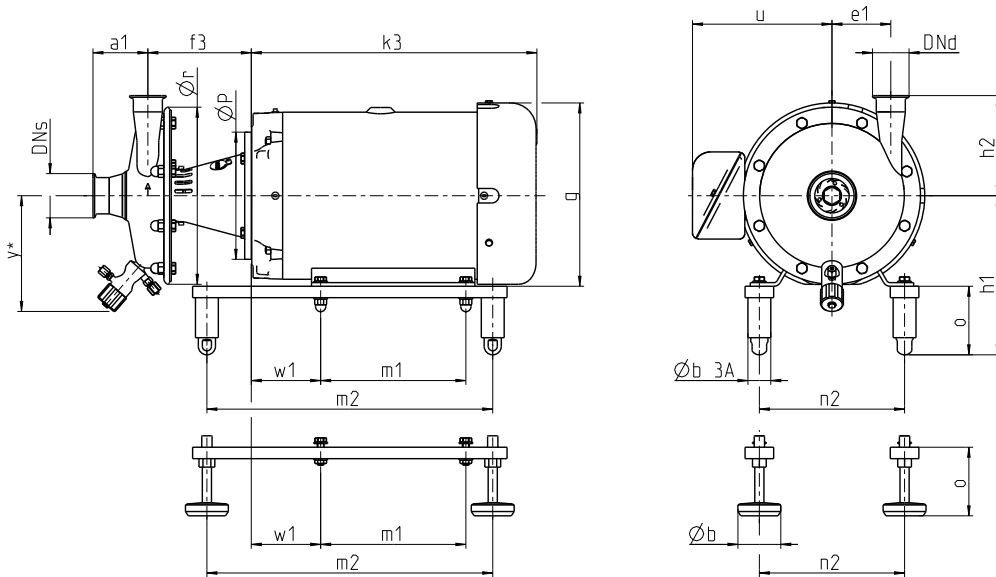

e1 = 4.90 inch
Ør = 13.54 inch
Y* = 8.27 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
213TC	7.50	16.70	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	189.00
215TC	10.00	18.27	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	218.00
254TC	15.00	18.56	7.05	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	253.00
256TC	20.00	19.35	7.05	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	305.00
284TSC	25.00	23.31	6.35	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	408.00
286TSC	30.00	23.31	6.35	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	517.00
324TSC	40.00	25.87	6.83	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	673.00


Connections

DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.89	2.71	2.99	2.76	4.52	3.35	2.72	2.90	3.92
h2	8.24	7.93	8.15	8.11	9.62	8.50	7.91	8.25	9.27

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

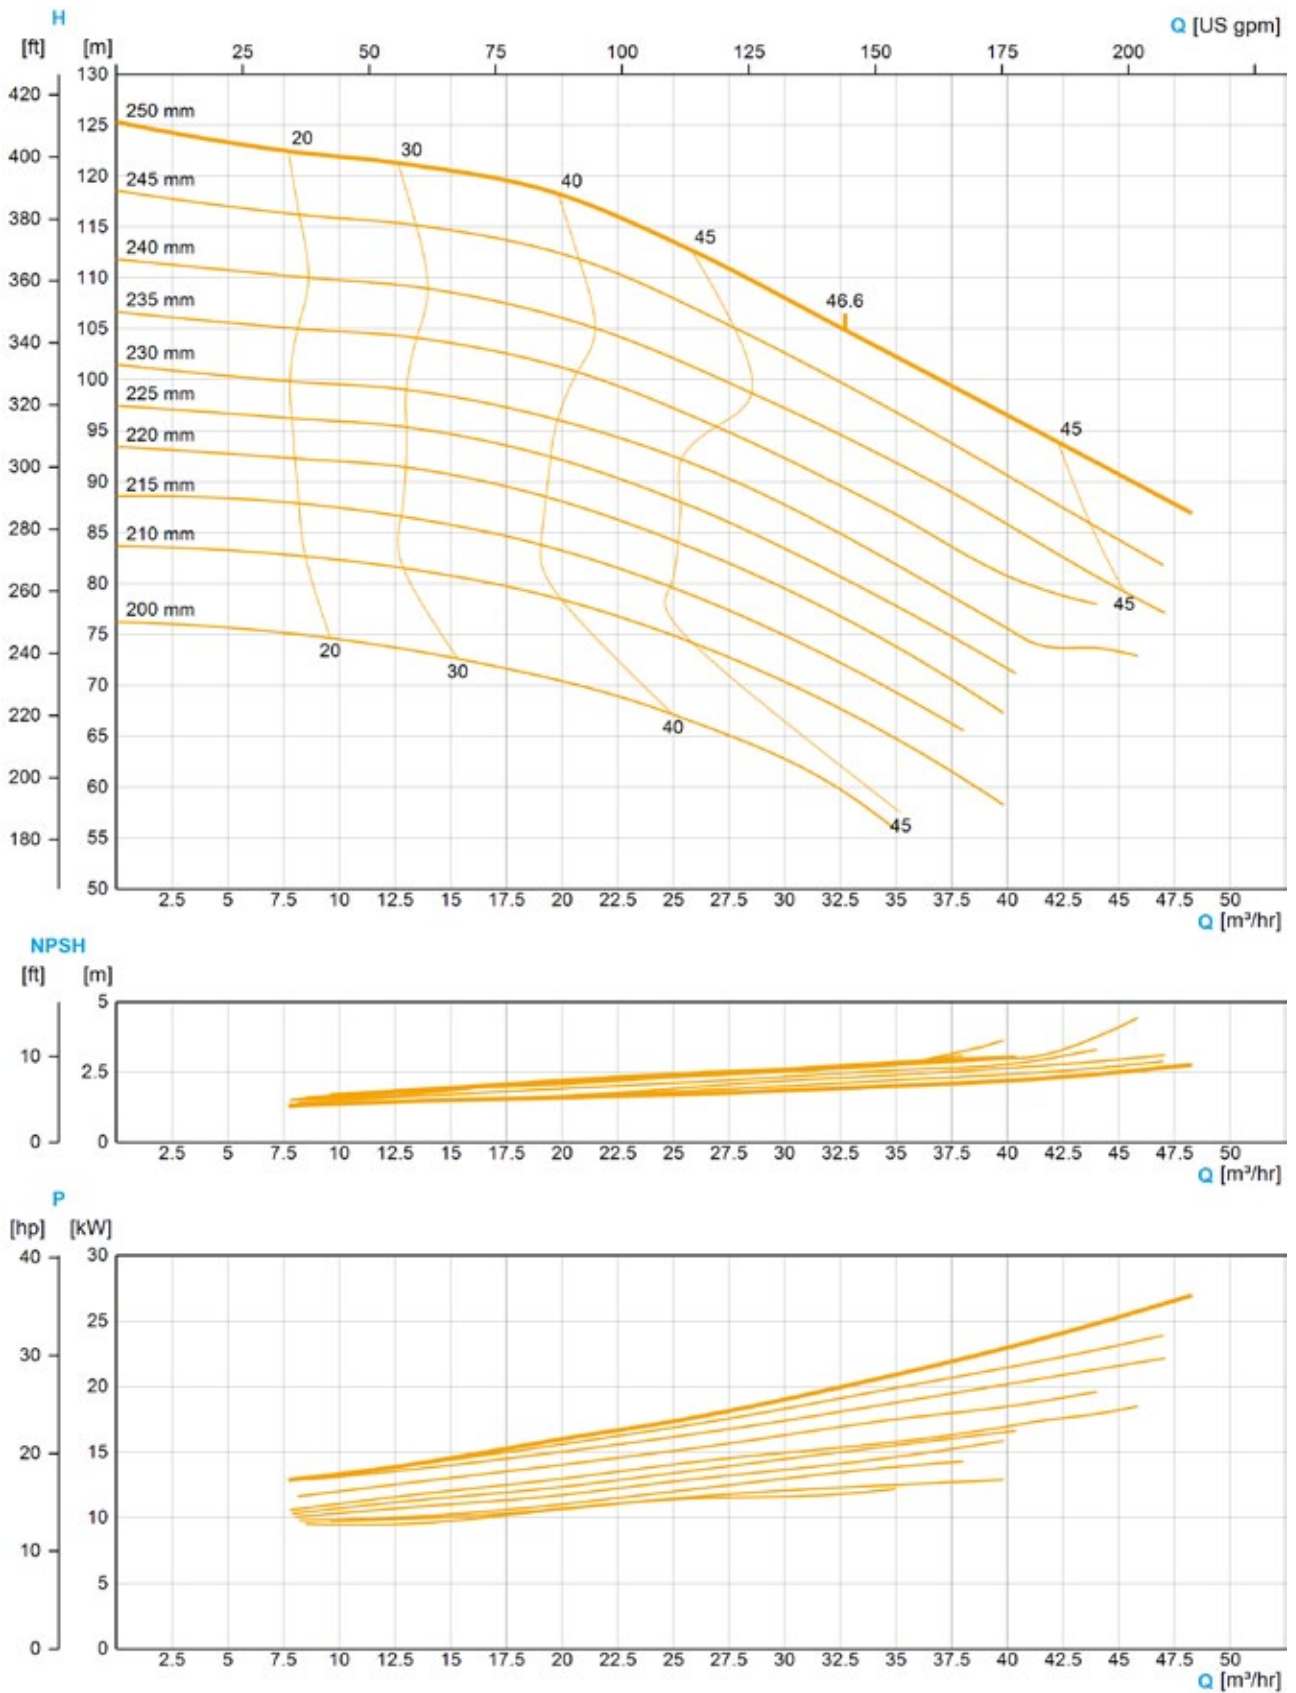

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2"; 2½"; 3", Pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 85 m³/h (374 US gpm)
Pump head	Max. 95 m (312 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

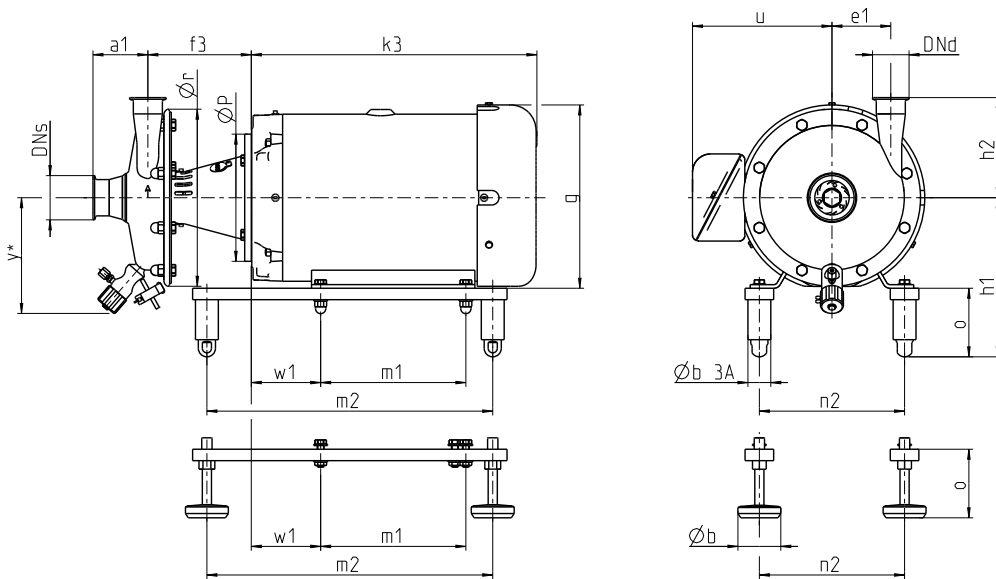

e1 = 4.06 inch
Ør = 12.17 inch
Y* = 7.95 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.29	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	137.00
213TC	7.50	16.70	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	191.00
215TC	10.00	18.27	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	220.00
254TC	15.00	18.56	6.91	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	249.00
256TC	20.00	19.35	6.91	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	290.00
284TSC	25.00	23.31	6.21	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	441.00
286TSC	30.00	23.31	6.21	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	491.00


Connections

DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.87	2.69	2.97	2.74	4.50	3.33	2.70	2.88	3.90
h2	6.90	6.59	6.81	6.76	8.28	7.15	6.56	6.91	7.93

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

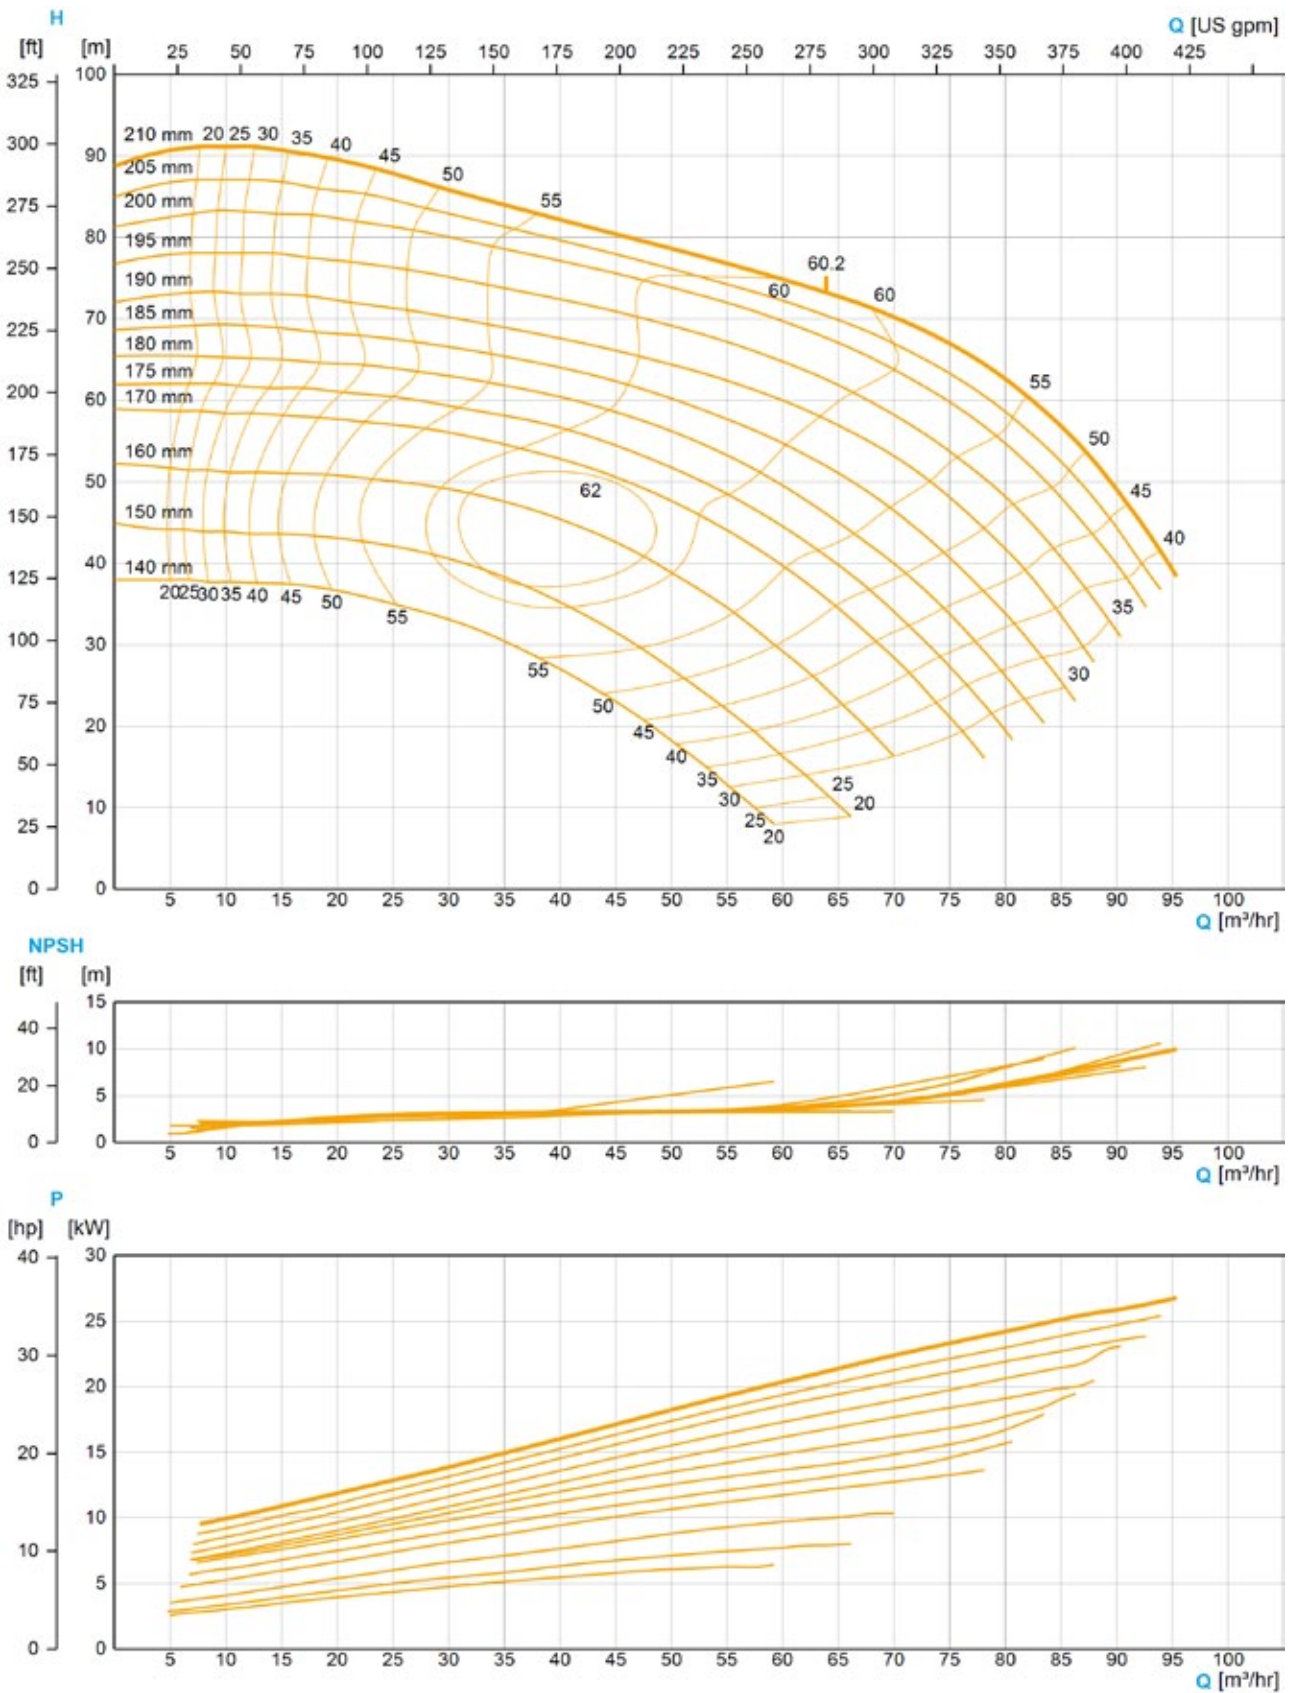

The flow charts are based on water, temperature 59 °F






Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", Pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 80 m³/h (352 US gpm)
Pump head	Max. 110 m (361 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

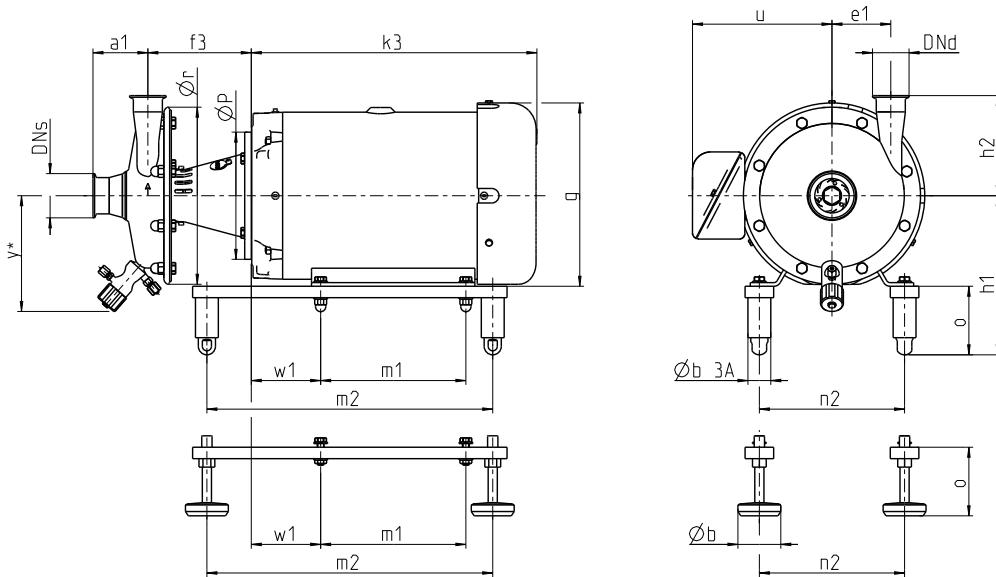

e1 = 4.51 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	140.00
213TC	7.50	16.70	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	194.00
215TC	10.00	18.27	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	223.00
254TC	15.00	18.56	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	257.00
256TC	20.00	19.35	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	310.00
284TSC	25.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	459.00
286TSC	30.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	490.00


Connections

DNs 3" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.30	9.11	9.33	9.16	10.92	9.75	9.12	9.30	10.32

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

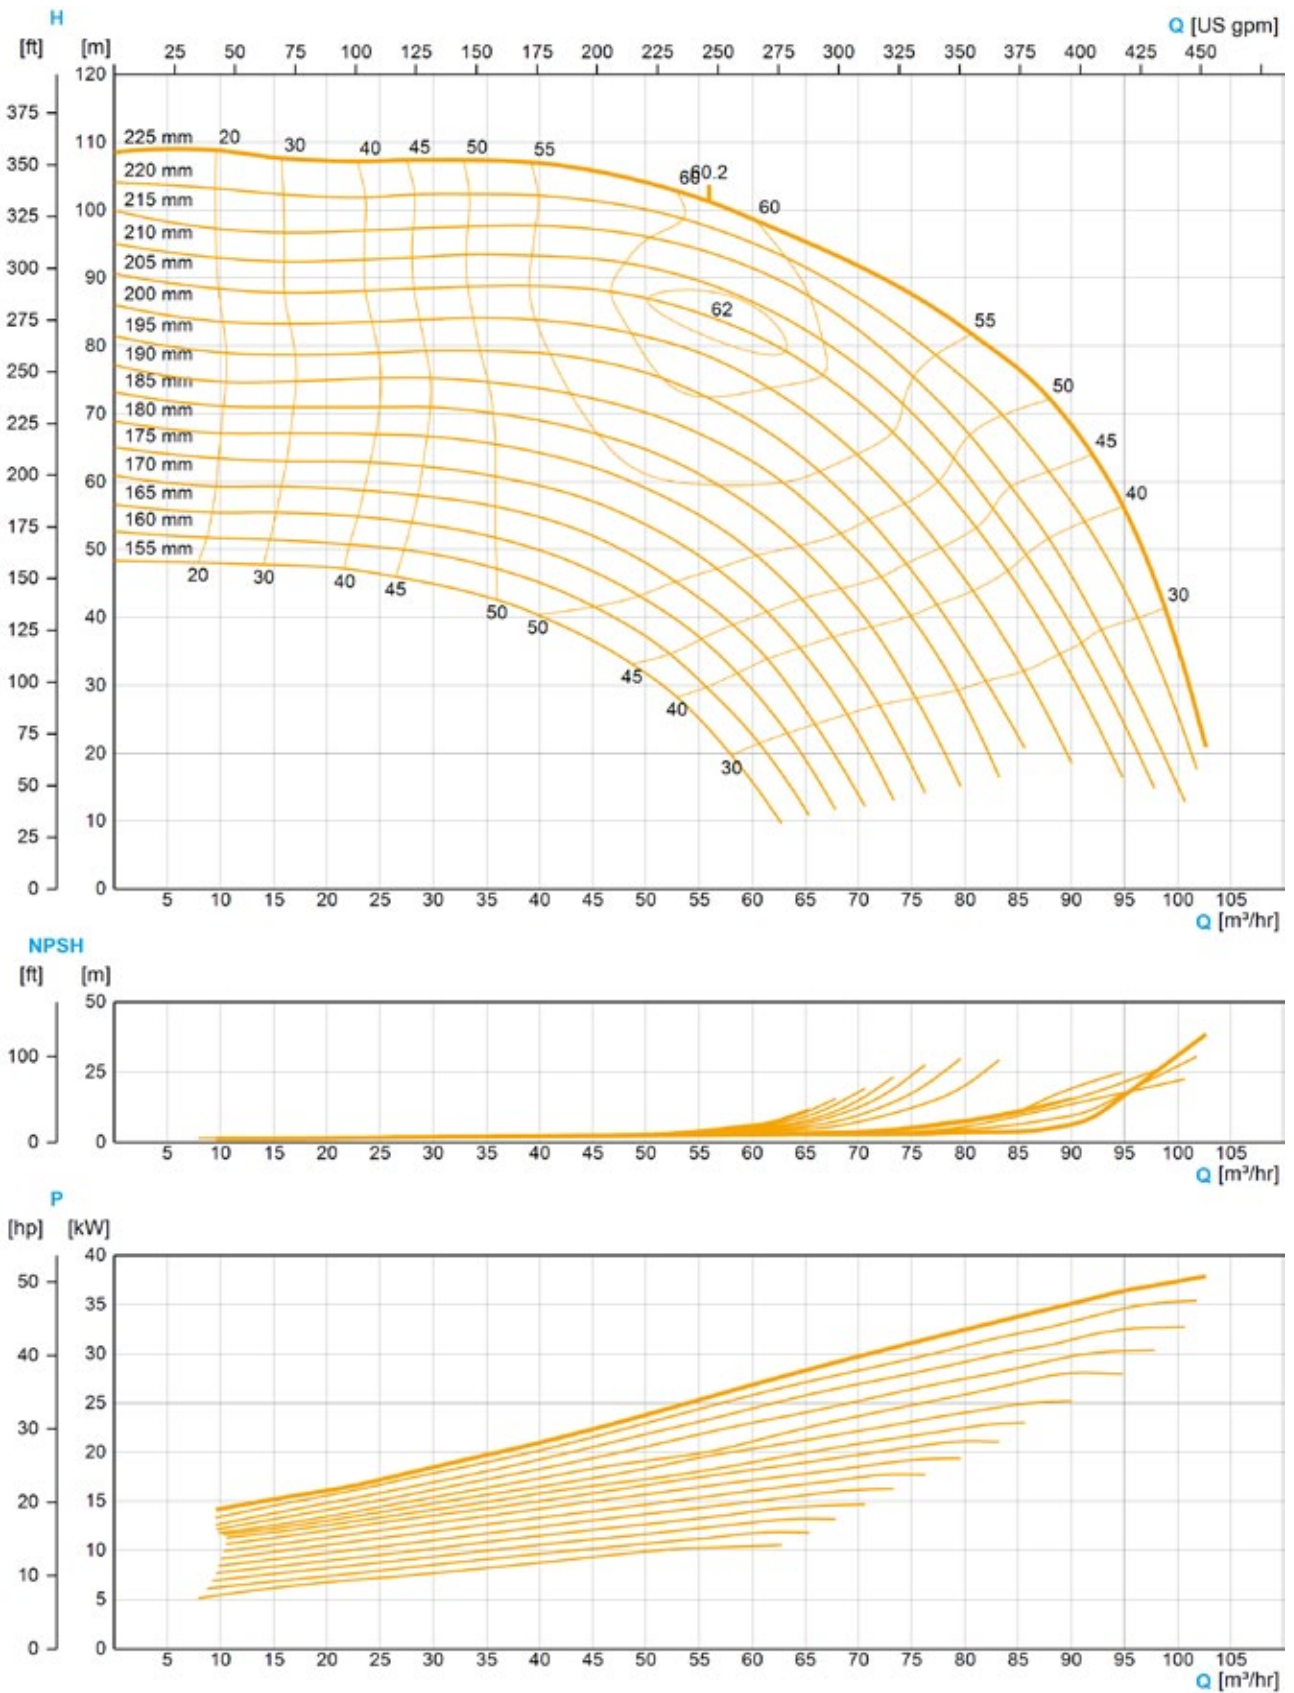

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 2½"; 3", Pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 120 m³/h (528 US gpm)
Pump head	Max. 105 m (345 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

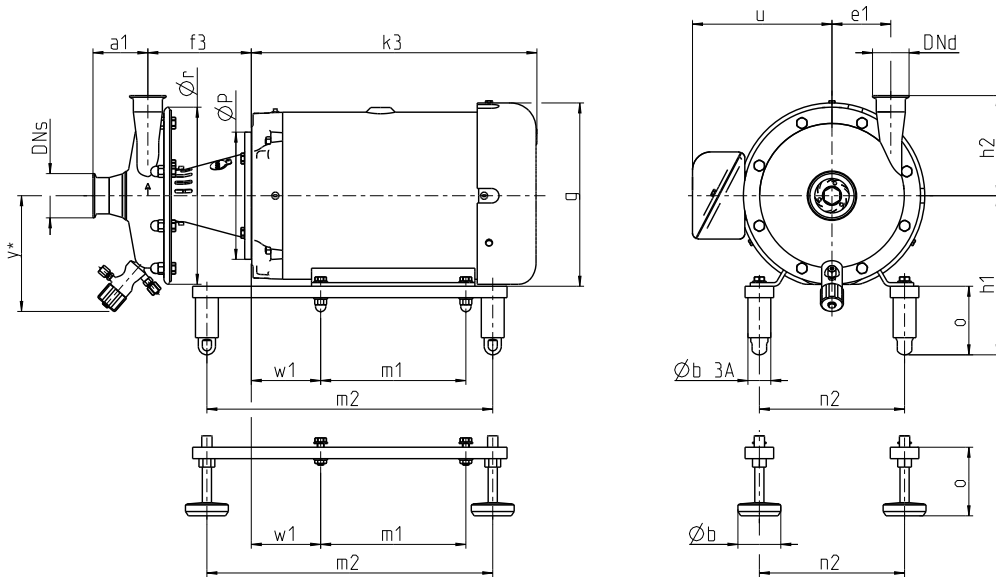

e1 = 4.33 inch
Ør = 13.15 inch
Y* = 8.46 inch


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	140.00
213TC	7.50	16.70	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	194.00
215TC	10.00	18.27	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	223.00
254TC	15.00	18.56	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	257.00
256TC	20.00	19.35	6.94	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	310.00
284TSC	25.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	459.00
286TSC	30.00	23.31	6.25	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	490.00

Connections										
DNs 3" OD DND 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43	
h2	9.08	8.90	9.12	8.94	10.71	9.53	8.90	9.09	10.11	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

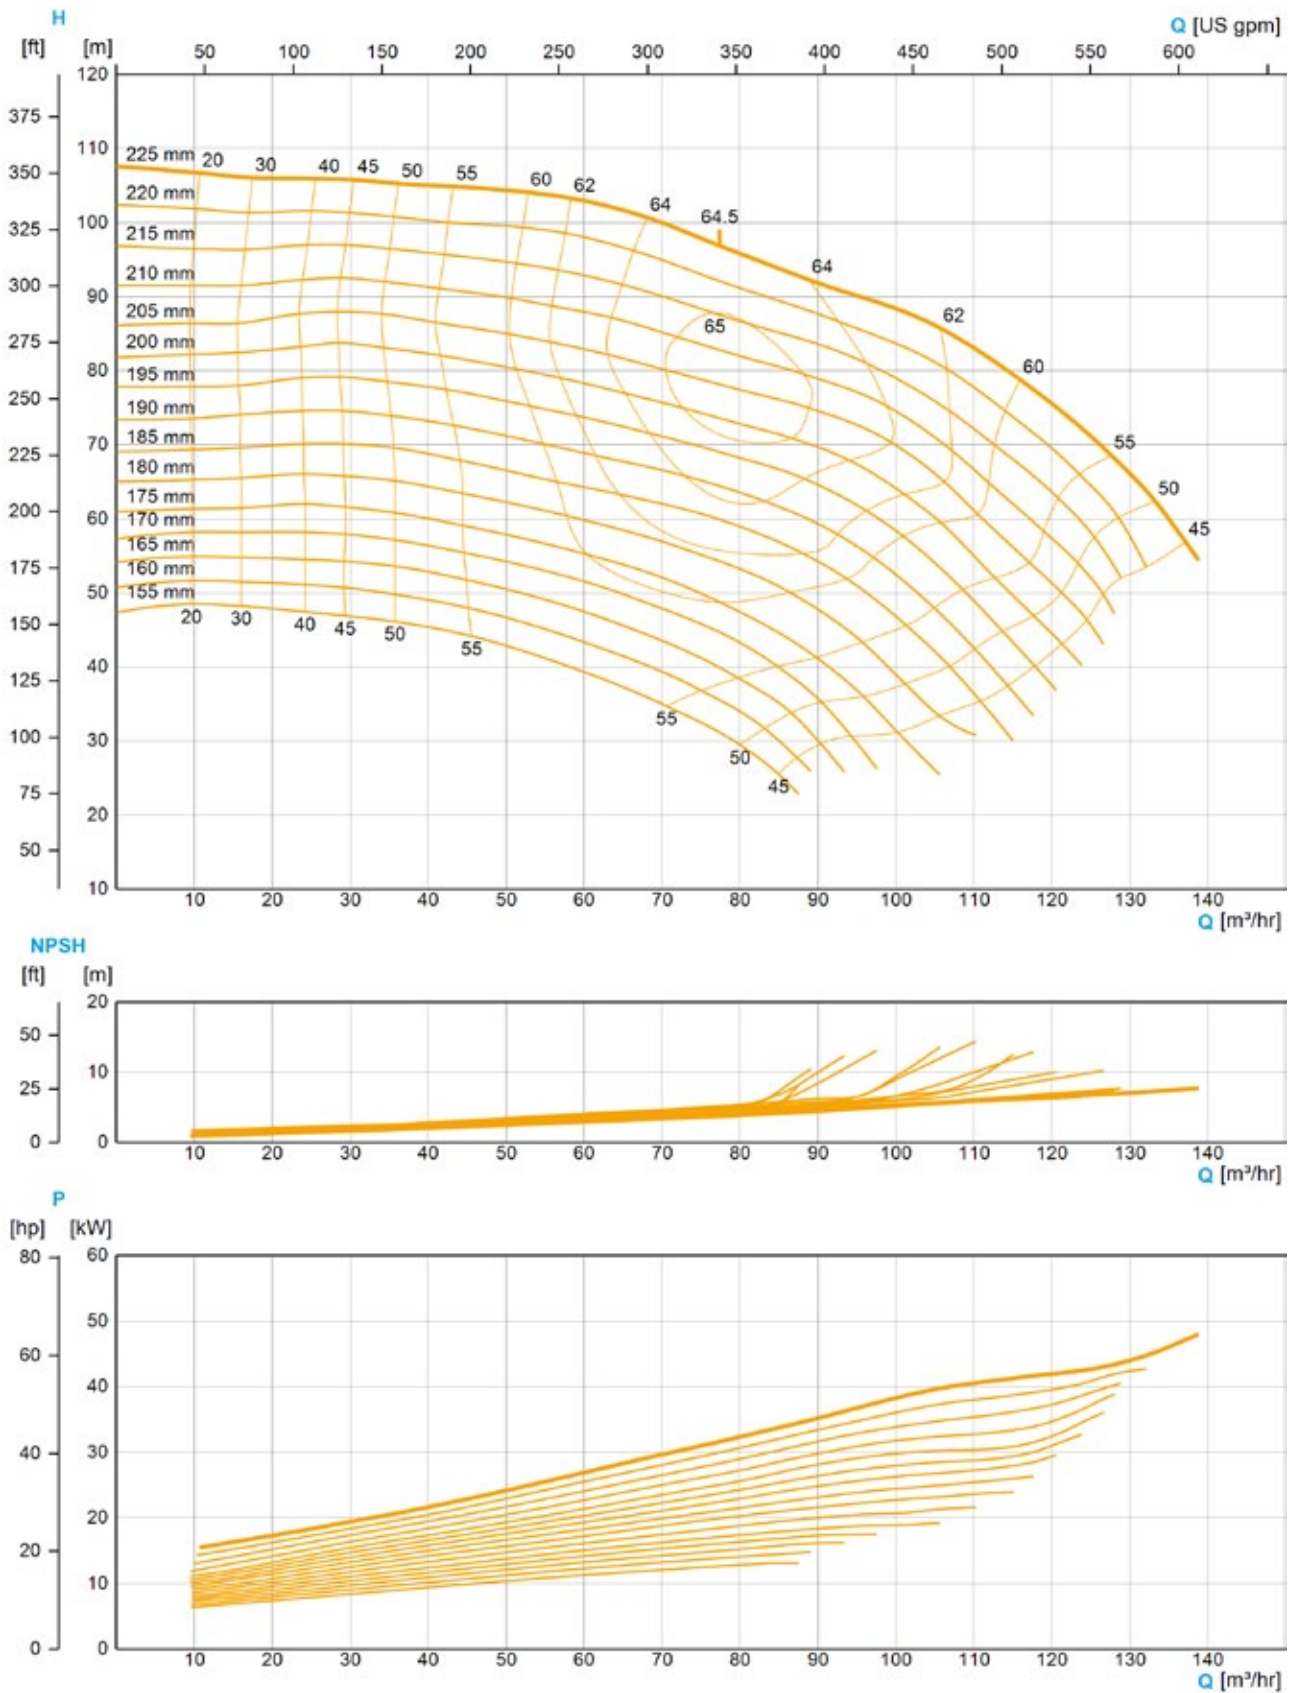

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 3"; 4", Pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 150 m³/h (660 US gpm)
Pump head	Max. 82 m (269 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

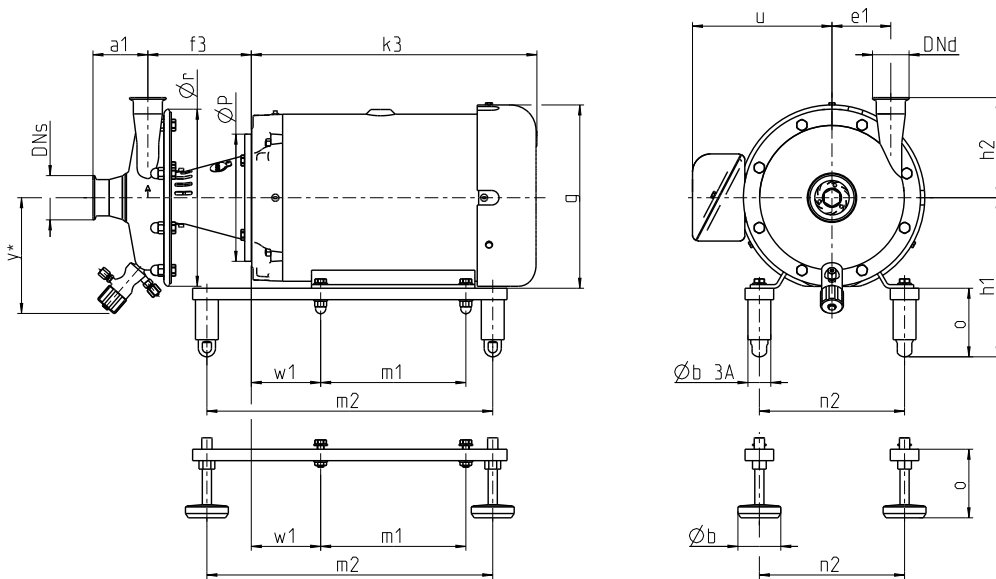


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.12	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	190.00
213TC	7.50	16.70	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	252.00
215TC	10.00	18.27	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	386.00
254TC	15.00	18.56	6.74	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	319.00
256TC	20.00	19.35	6.74	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	355.00
284TSC	25.00	23.31	6.04	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	494.00
286TSC	30.00	23.31	6.04	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	604.00
324TSC	40.00	25.87	6.52	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	593.00

Connections										
DNs 4" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	4.76	4.64	4.80	4.63	6.64	5.77	5.02	4.77	5.79	
h2	9.83	9.65	9.87	9.69	11.46	10.28	9.65	9.84	10.86	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

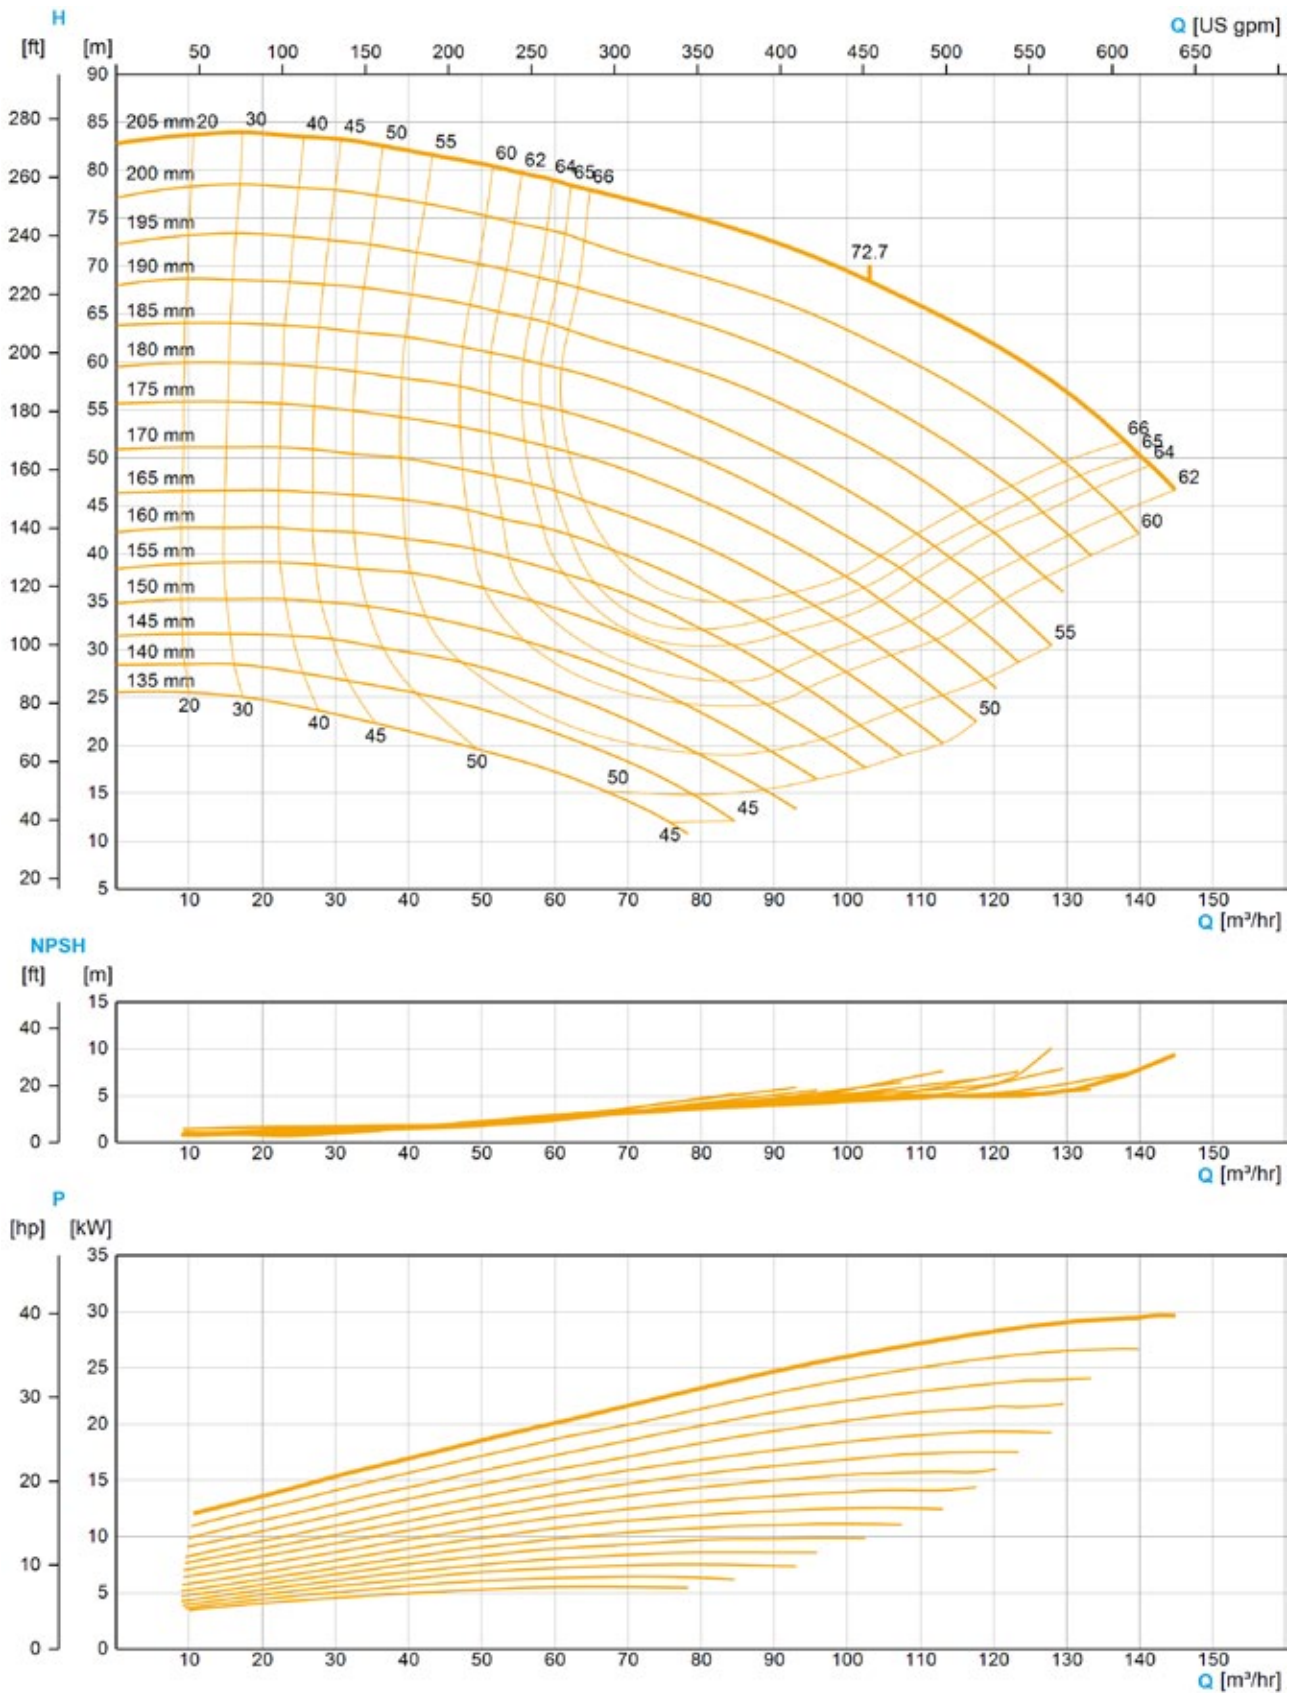

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 3"; 4", Pressure side 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 125 m³/h (550 US gpm)
Pump head	Max. 130 m (427 ft)
Housing pressure	Max. 16 bar (232 psi)



Further options see page 150 (Composition of Order Code)

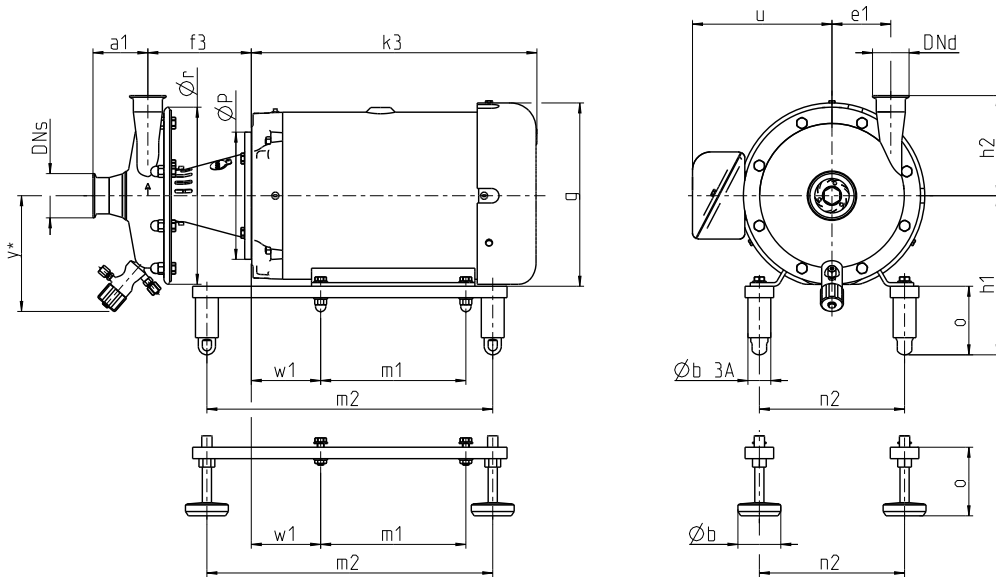


e1 = 4.88 inch
Ør = 14.13 inch
Y* = 8.82 inch

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
254TC	15.00	18.56	7.03	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	262.00
256TC	20.00	19.35	7.03	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	315.00
284TSC	25.00	23.31	6.34	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	477.00
286TSC	30.00	23.31	6.34	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	579.00
324TSC	40.00	25.87	6.81	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	683.00
326TSC	50.00	25.87	6.81	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	747.00

Connections										
DN _s 4" OD DN _d 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	4.70	4.58	4.74	4.57	6.58	5.71	4.96	4.71	5.73	
h2	9.92	9.74	9.96	9.78	11.55	10.37	9.74	9.93	10.95	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
* Option: drain valve (dimensions and other drainage variants on request)
Weight: net-weight without packaging

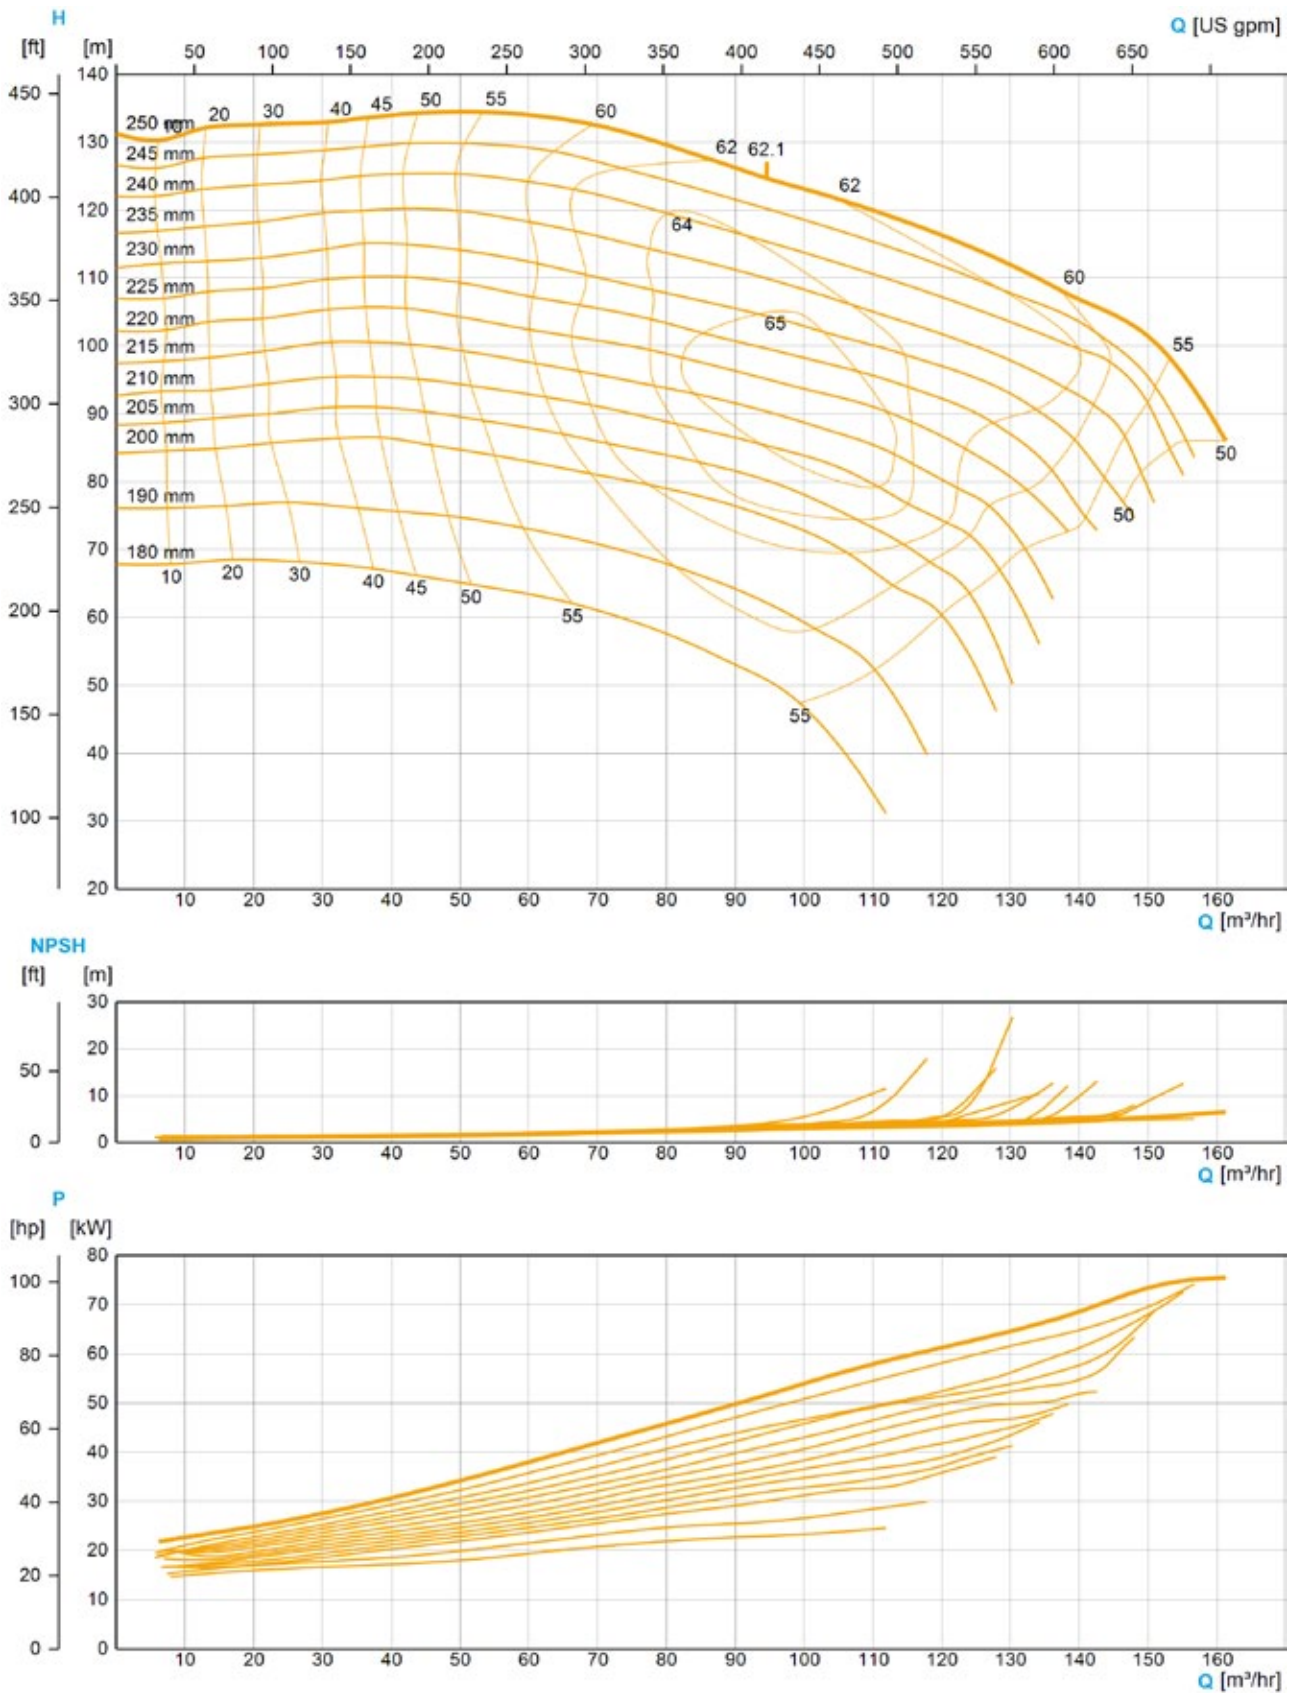


The flow charts are based on water, temperature 59 °F



Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction side 4", Pressure side 4"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 240 m ³ /h (1,047 US gpm)
Pump head	Max. 70 m (230 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	

Further options see page 150 (Composition of Order Code)

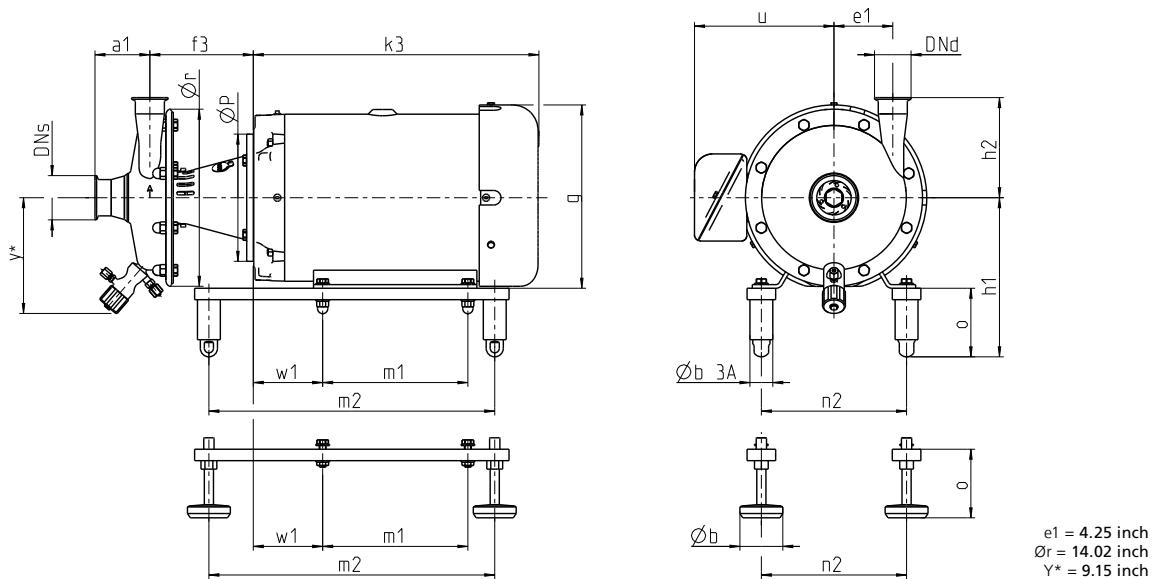


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4" [inch]	o +/- 0.4" [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
254TC	15.00	18.56	6.76	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	287.00
256TC	20.00	19.35	6.76	10.97	4.72	8.50	9.45	12.84	10.00	19.69	10.00	4.75	8.82	1.18	2.95	327.00
284TSC	25.00	23.31	6.07	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	478.00
286TSC	30.00	23.31	6.07	11.72	4.72	10.50	11.07	14.07	11.00	21.65	11.00	4.75	9.61	1.18	2.95	534.00
324TSC	40.00	25.87	6.54	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	691.00
326TSC	50.00	25.87	6.54	12.92	4.92	12.50	12.58	15.95	12.00	22.83	12.50	5.25	9.61	1.18	3.94	755.00
364TSC	60.00	28.59	6.54	13.92	4.92	12.50	16.02	17.96	12.20	23.62	14.00	5.88	9.61	1.18	3.94	1,034.00

Connections										
DNs 4" OD DNd 4" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	7.29	7.17	7.51	7.15	9.17	8.29	7.54	7.30	8.32	
h2	11.72	11.60	11.94	11.58	13.60	12.72	11.98	11.73	12.75	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

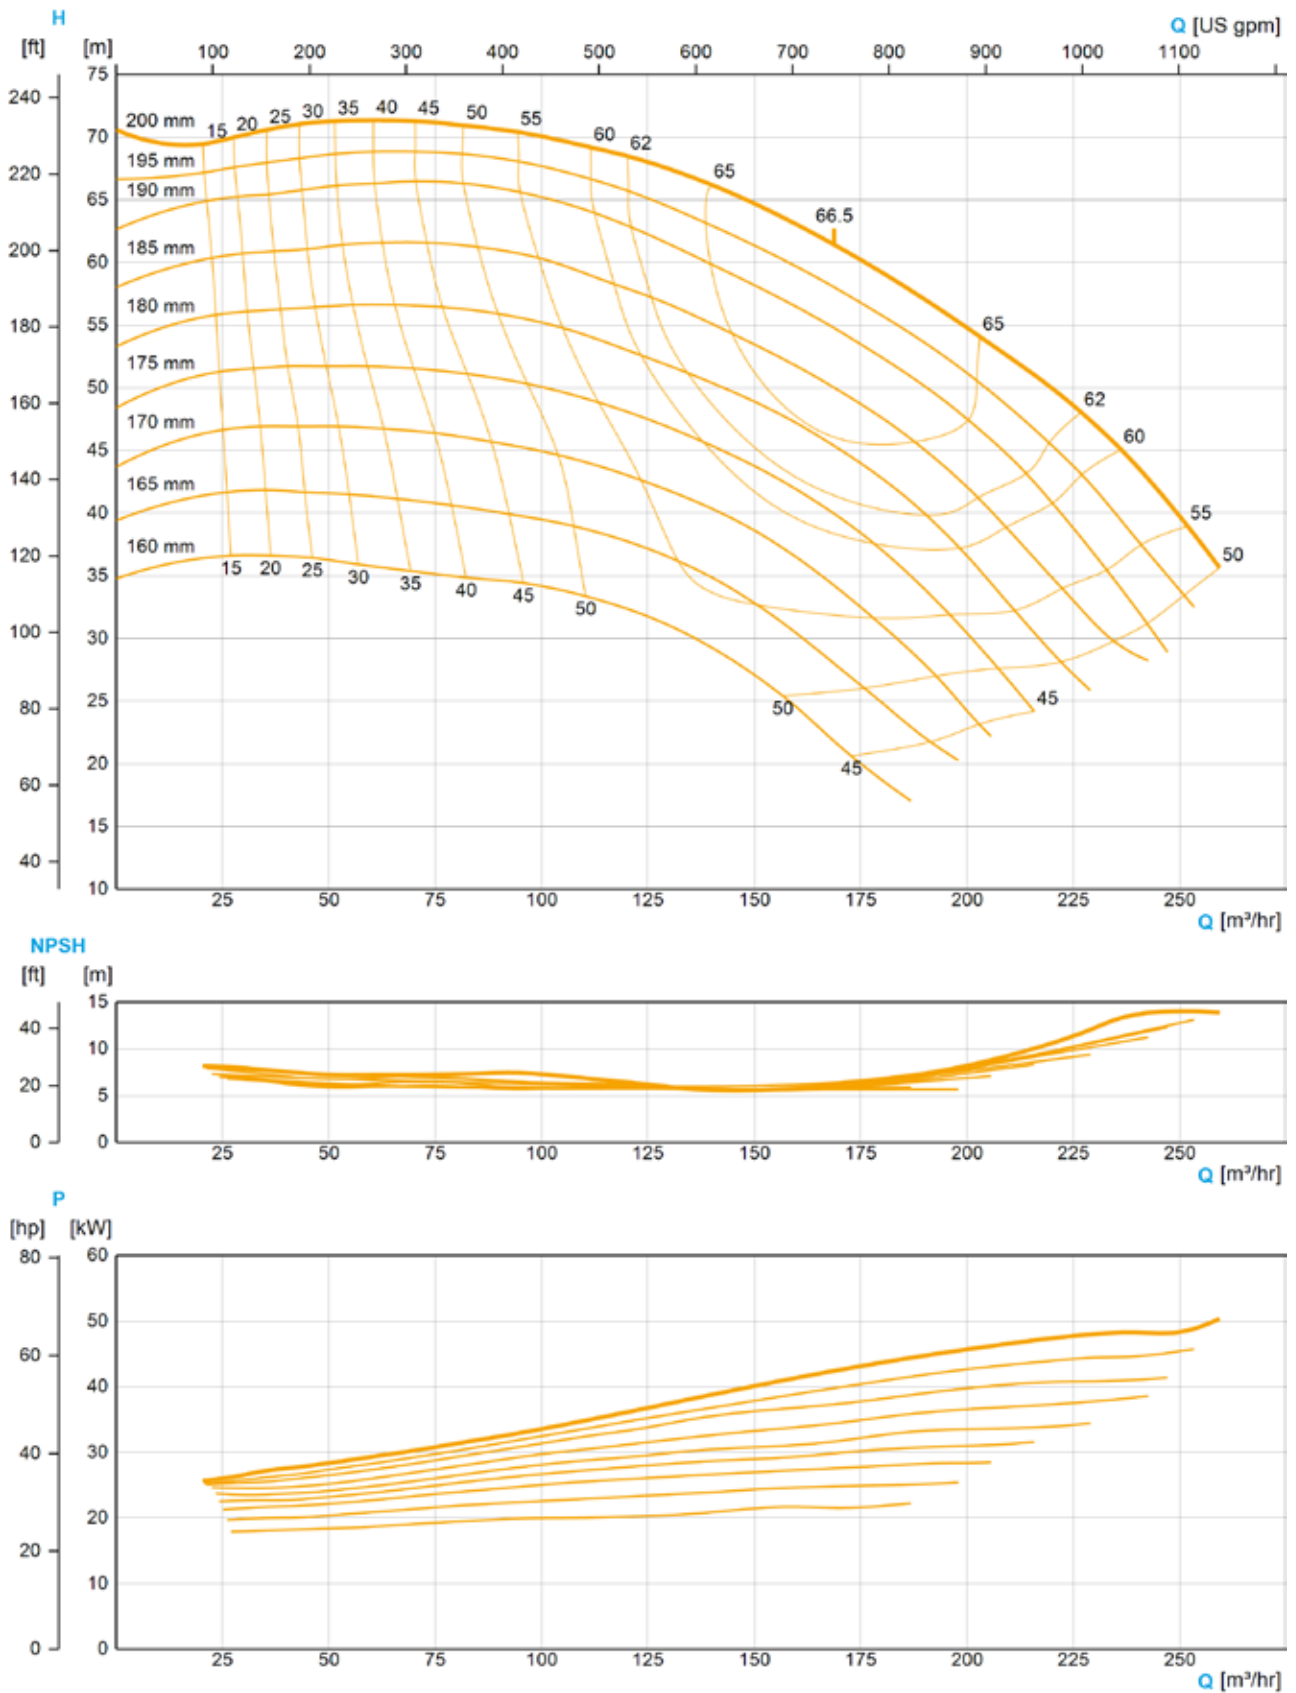

The flow charts are based on water, temperature 59 °F



**GEA Hilge TP
4-pole
60 Hz**

GEA Hilge TP 1020

GEA Hilge TP 1540

GEA Hilge TP 2030

GEA Hilge TP 2050

GEA Hilge TP 2575

GEA Hilge TP 3050

GEA Hilge TP 5060



GEA Hilge TP 7060

GEA Hilge TP 8050


GEA Hilge TP 8080

GEA Hilge TP 16040



Technical data of the standard version	
Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2", pressure port 1 1/2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 11 m³/h (48 US gpm)
Pump head	Max. 8 m (26 ft)
Housing pressure	Max. 10 bar (145 psi)
Certificates	 

Further options see page 150 (Composition of Order Code)

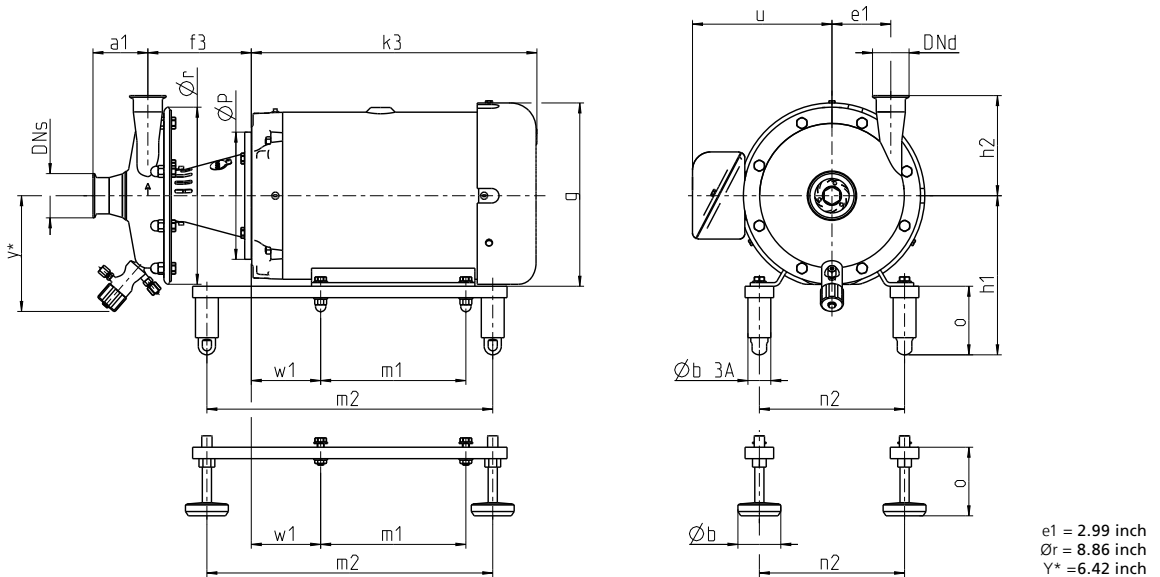


Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	75.00
143TC	1.50	11.33	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	76.00
145TC	2.00	11.73	5.85	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	79.00
182TC	3.00	13.59	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	128.00
184TC	5.00	15.16	7.06	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	119.00

Connections										
DNs 2" OD DNd 1 1/2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.43	2.12	2.34	2.30	3.81	3.20	2.10	2.31	3.46	
h2	5.82	5.26	5.64	5.68	7.14	6.00	5.48	5.70	6.85	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

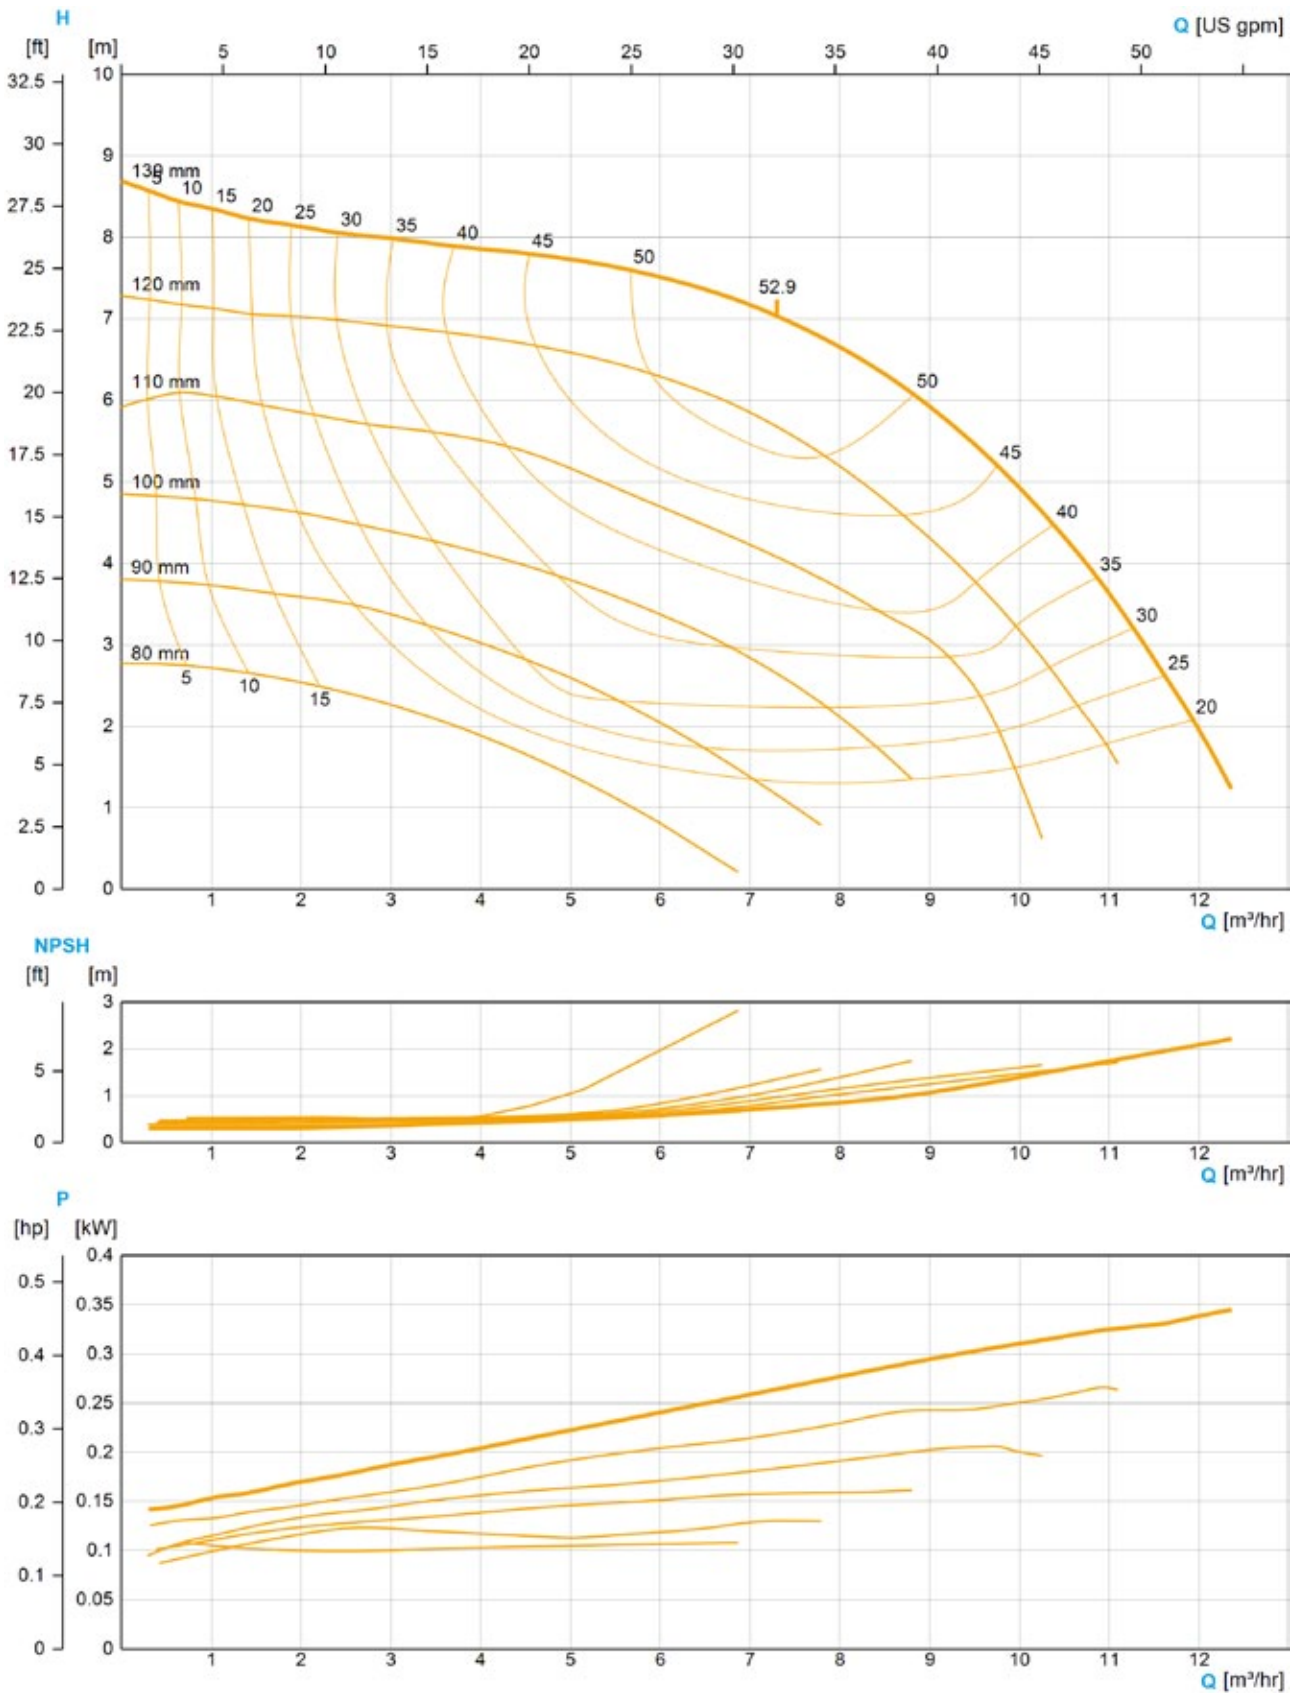

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2½"; 3", pressure port 1½"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 22 m³/h (97 US gpm)
Pump head	Max. 15.5 m (51 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

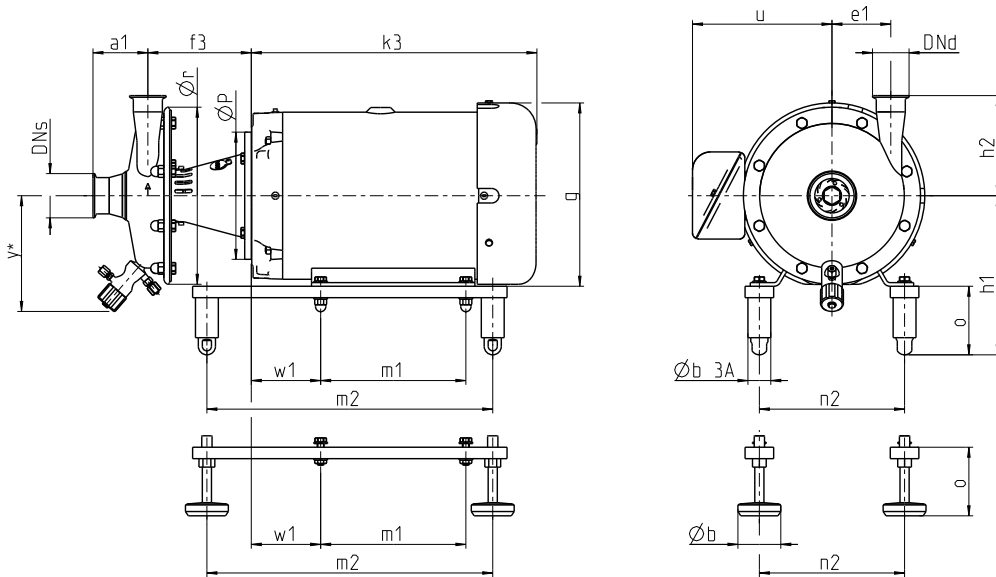

e1 = 3.54 inch
Ør = 10.79 inch
Y* = 7.28 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.50	11.33	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	85.00
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	88.00
182TC	3.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	137.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	129.00


Connections

DNs 3" OD DNd 1½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.67	2.49	2.77	2.53	4.30	3.12	2.49	2.68	3.70
h2	6.24	5.68	6.06	6.10	7.56	6.42	5.91	6.12	7.27

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

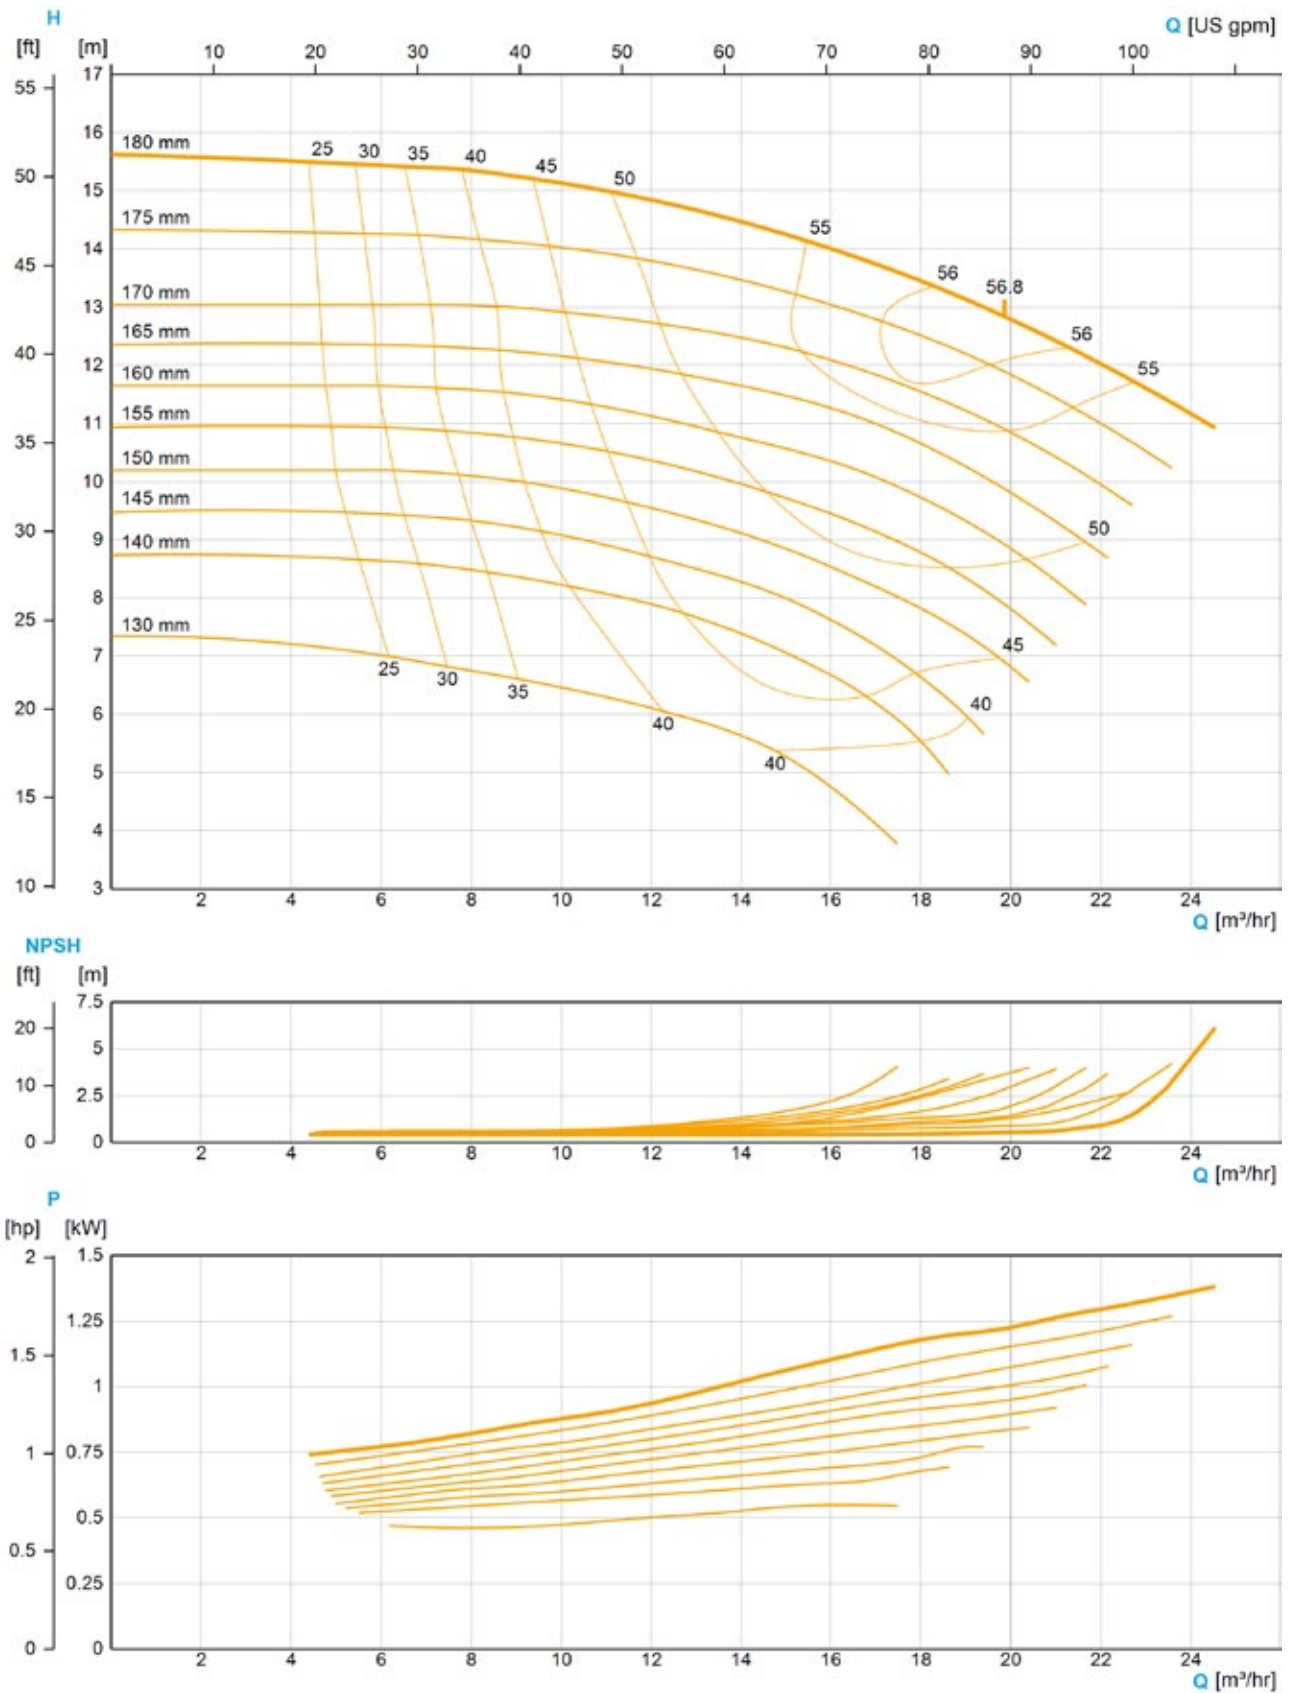

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2"; 2½"; 3", pressure port 1½"; 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 23 m³/h (101 US gpm)
Pump head	Max. 13 m (43 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

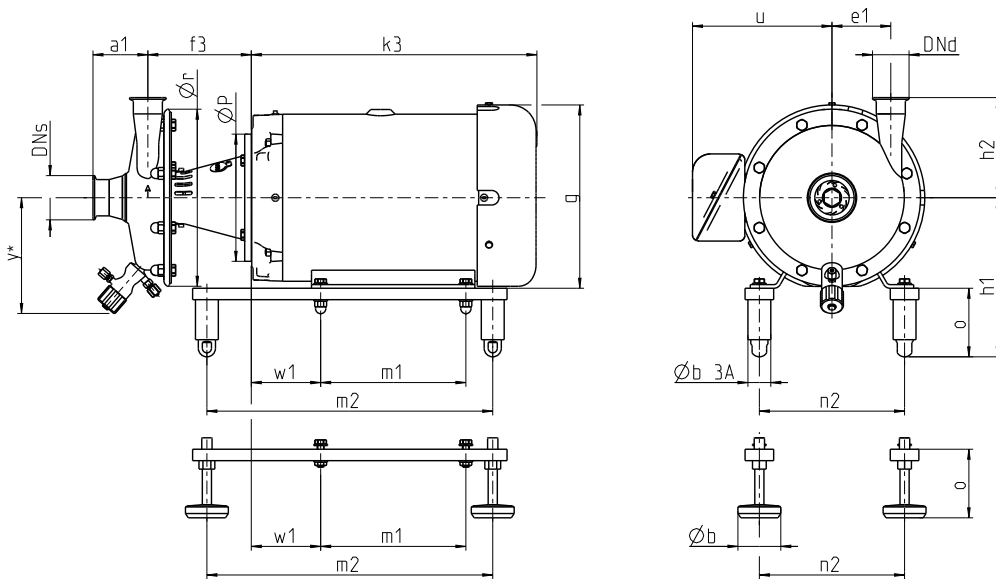


e1 = 3.35 inch
Ør = 10.20 inch
Y* = 7.09 inch

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	81.00
143TC	1.50	11.33	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	82.00
145TC	2.00	11.73	4.98	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	85.00
182TC	3.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	134.00
184TC	5.00	15.16	6.18	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	126.00
213TC	7.50	15.52	6.18	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	132.00

Connections										
DNS 2 ½" OD DNd 1 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.55	2.37	2.59	2.41	4.18	3.00	2.37	2.56	3.58	
h2	6.05	5.49	5.87	5.91	7.37	6.23	5.72	5.93	7.08	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
* Option: drain valve (dimensions and other drainage variants on request)
Weight: net-weight without packaging

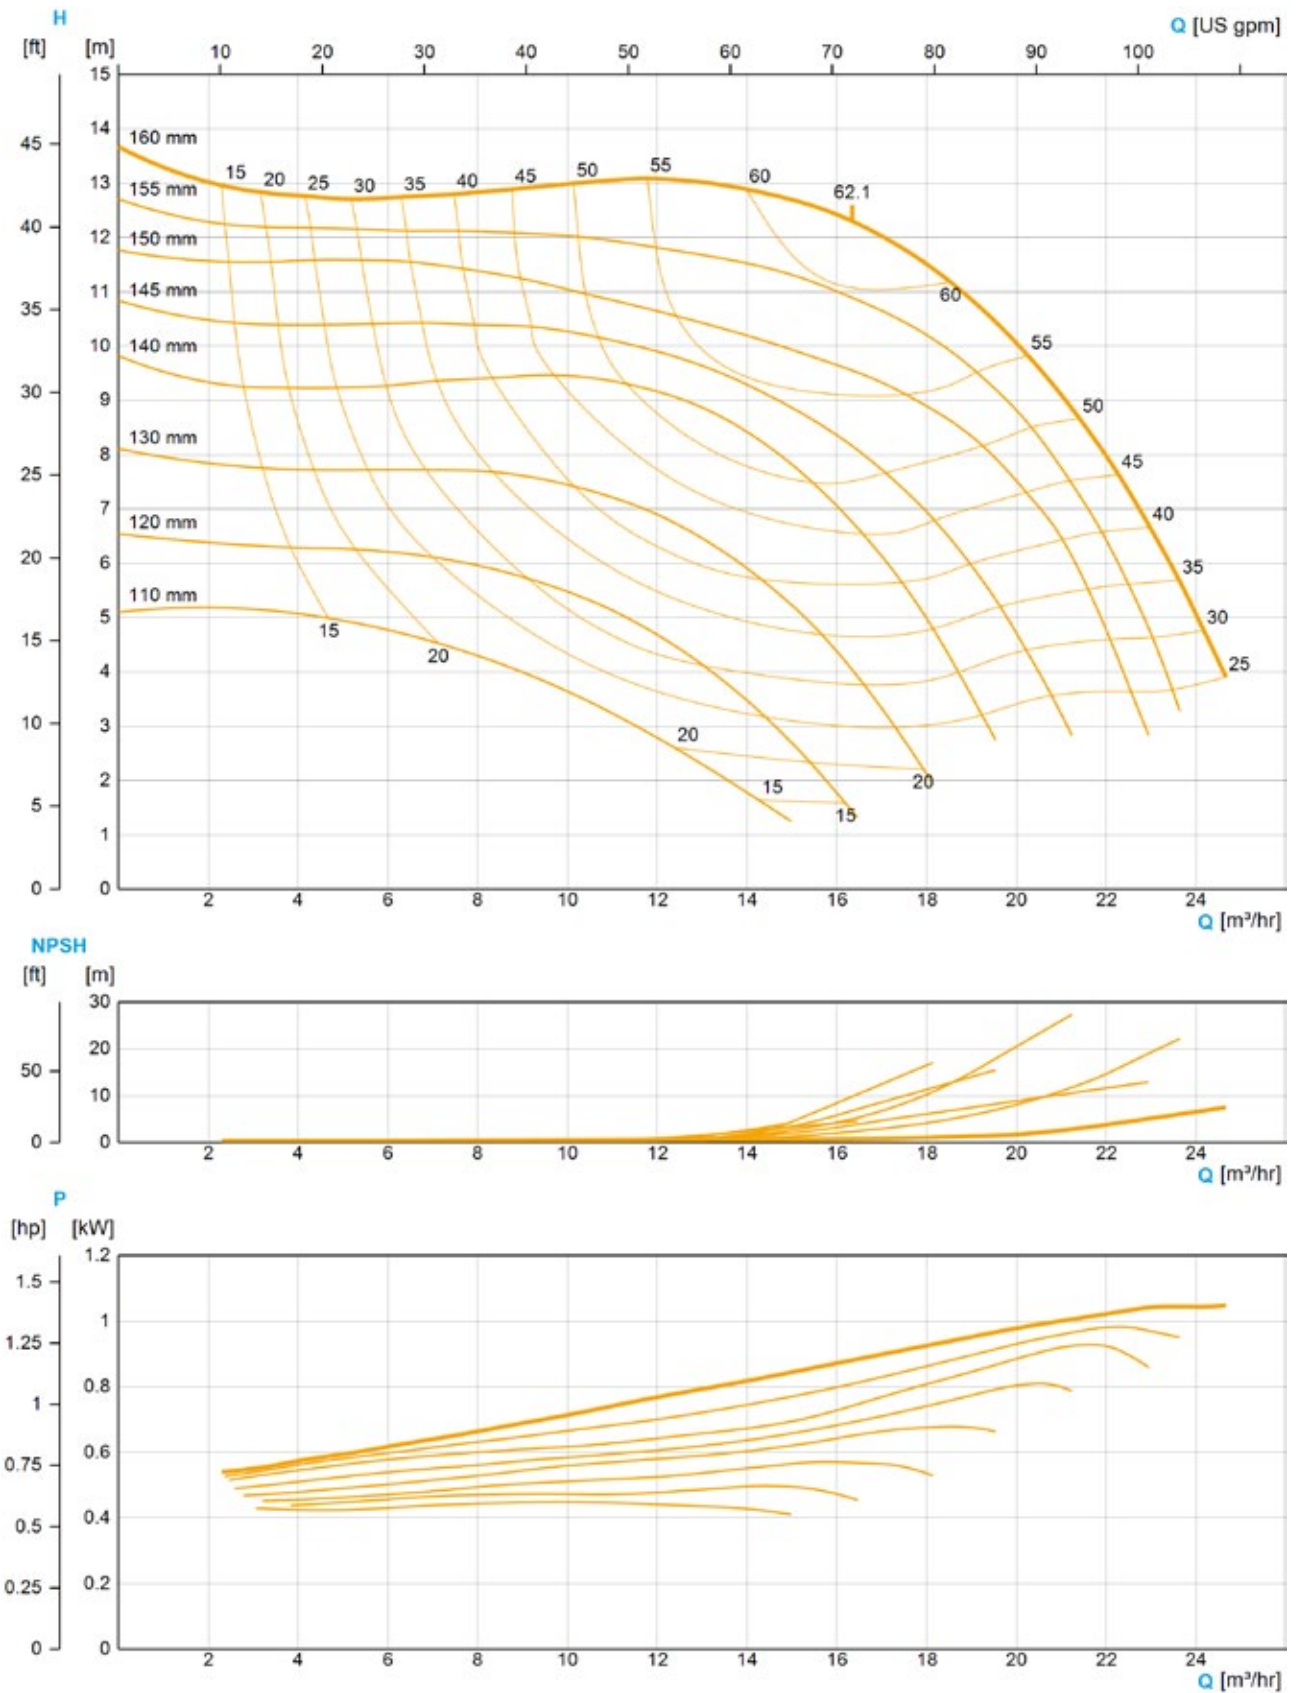

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2"; 2½"; 3", pressure port 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 21 m³/h (53 US gpm)
Pump head	Max. 22 m (69 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

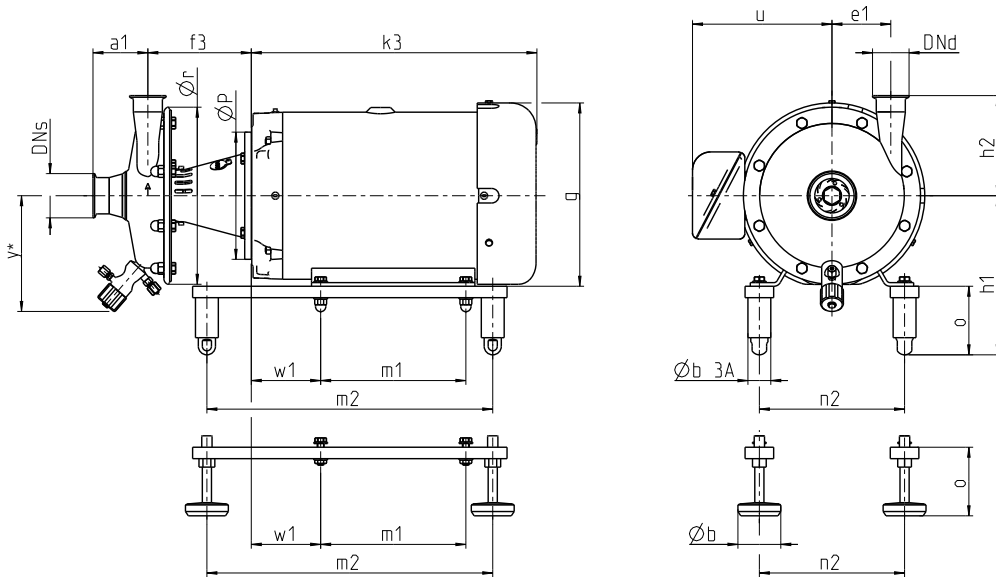

e1 = 4.21 inch
Ør = 12.17 inch
Y* = 7.95 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.17	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	89.00
143TC	1.50	11.33	5.17	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	90.00
145TC	2.00	11.73	5.17	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	93.00
182TC	3.00	15.16	6.37	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	142.00
184TC	5.00	15.16	6.37	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	134.00
213TC	7.50	15.52	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	140.00
215TC	10.00	15.91	6.37	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	172.00


Connections

DN _s 3" OD DN _d 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.94	2.75	3.03	2.80	4.56	3.39	2.76	2.94	3.96
h2	7.19	6.87	7.09	7.05	8.56	7.44	6.85	7.19	8.21

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

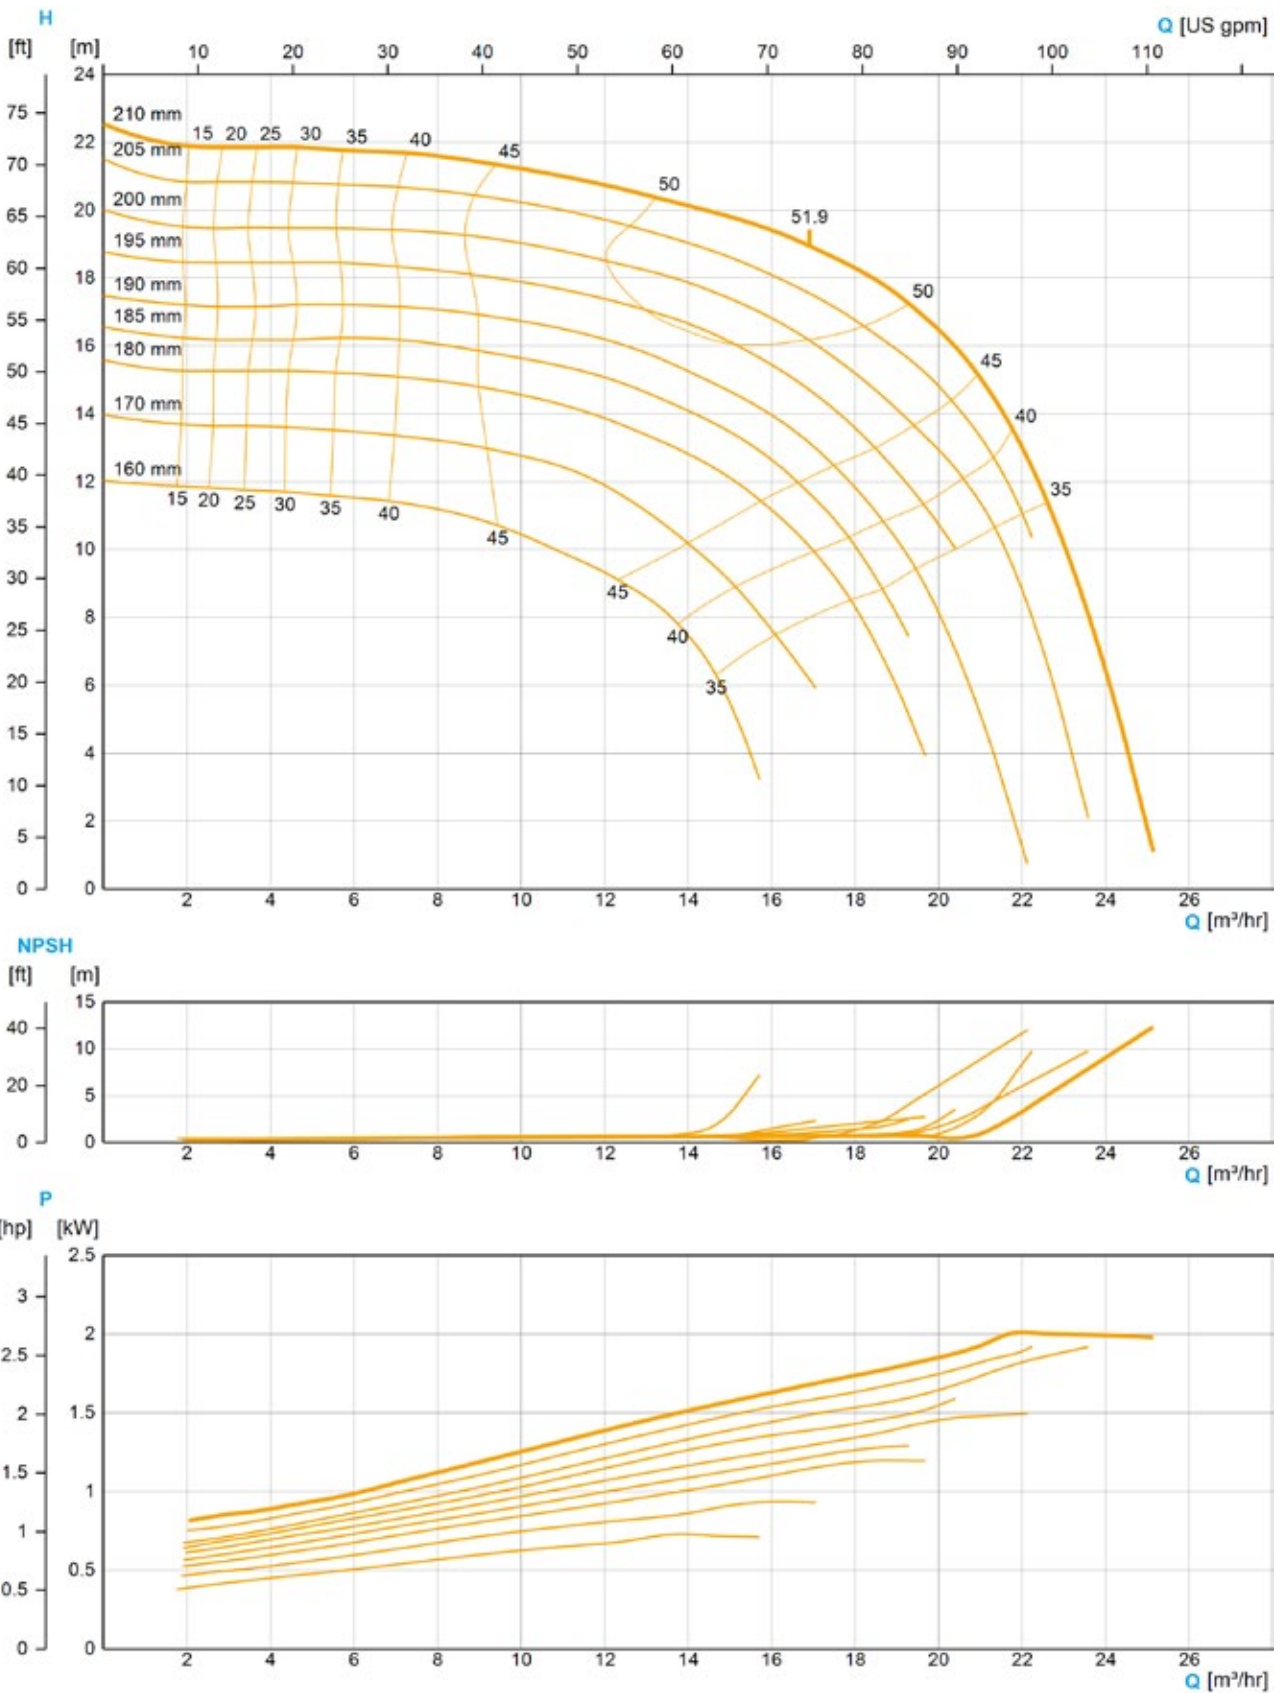

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2½"; 3", pressure port 2"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 22 m³/h (97 US gpm)
Pump head	Max. 31 m (102 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

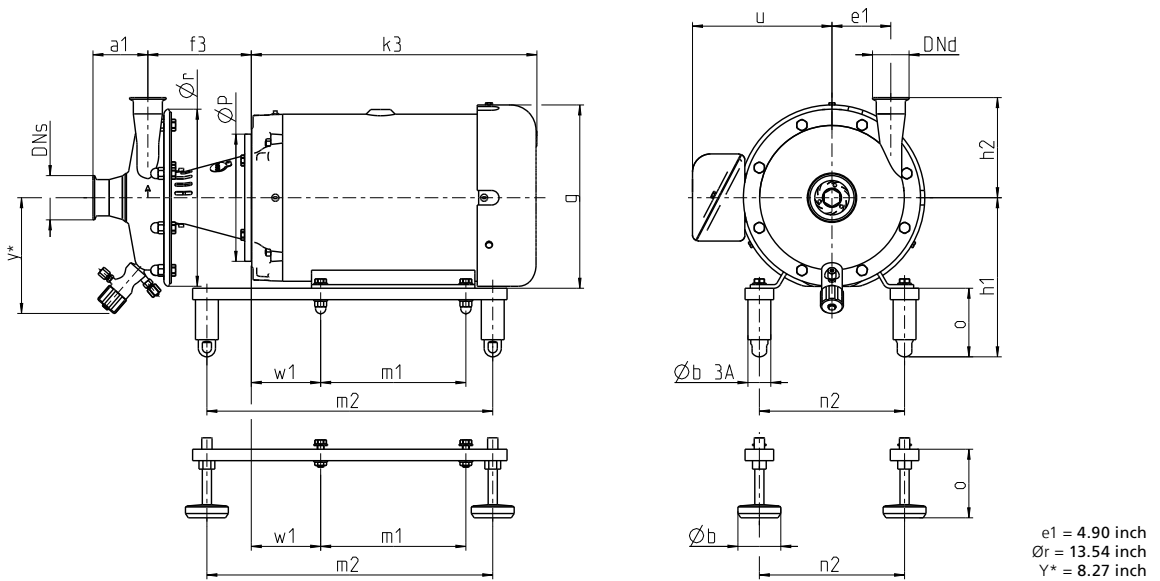

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.43	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	141.00
213TC	7.50	15.52	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	147.00
215TC	10.00	15.91	6.43	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	179.00


Connections

DNs 3" OD DNd 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	2.89	2.71	2.99	2.76	4.52	3.35	2.72	2.90	3.92
h2	8.24	7.93	8.15	8.11	9.62	8.50	7.91	8.25	9.27

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

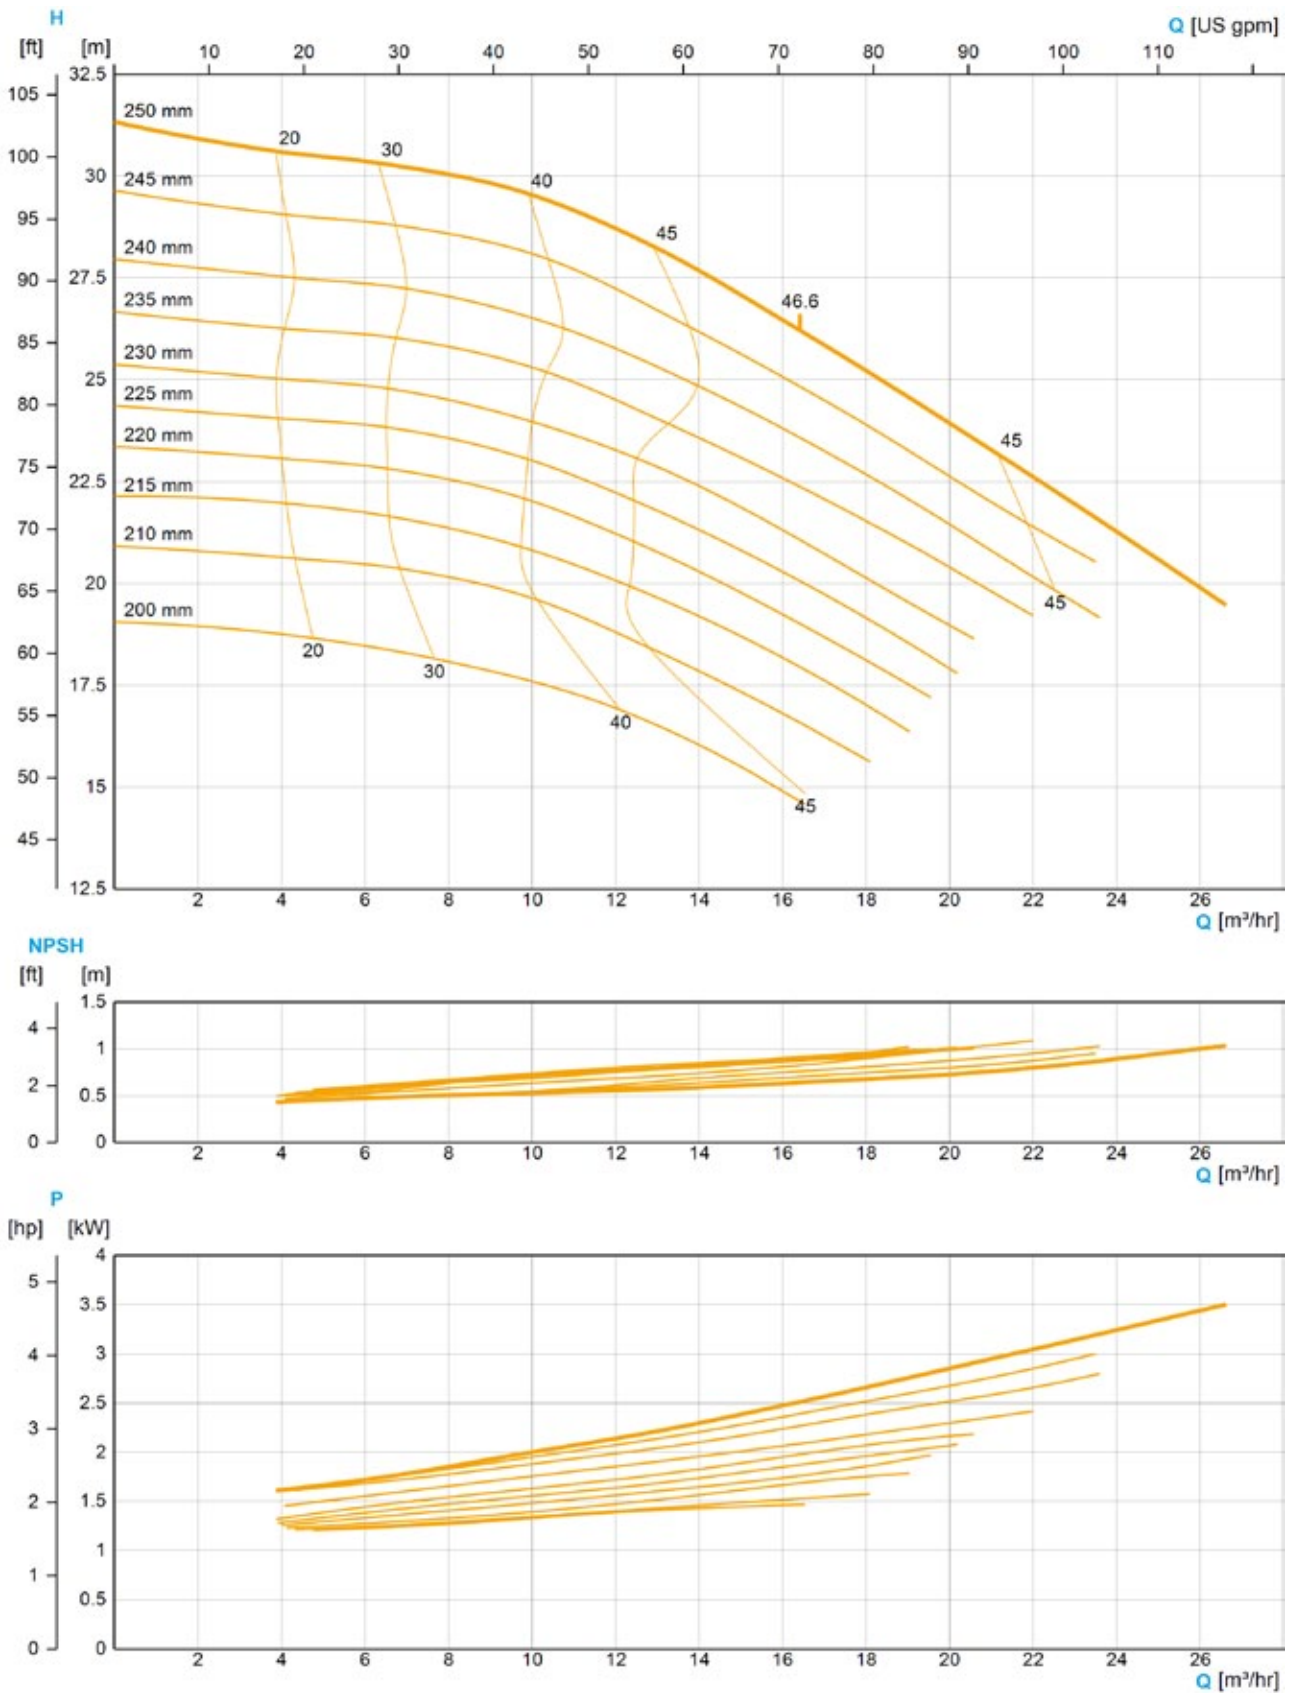

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2"; 2½"; 3", pressure port 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 42 m³/h (185 US gpm)
Pump head	Max. 24 m (79 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

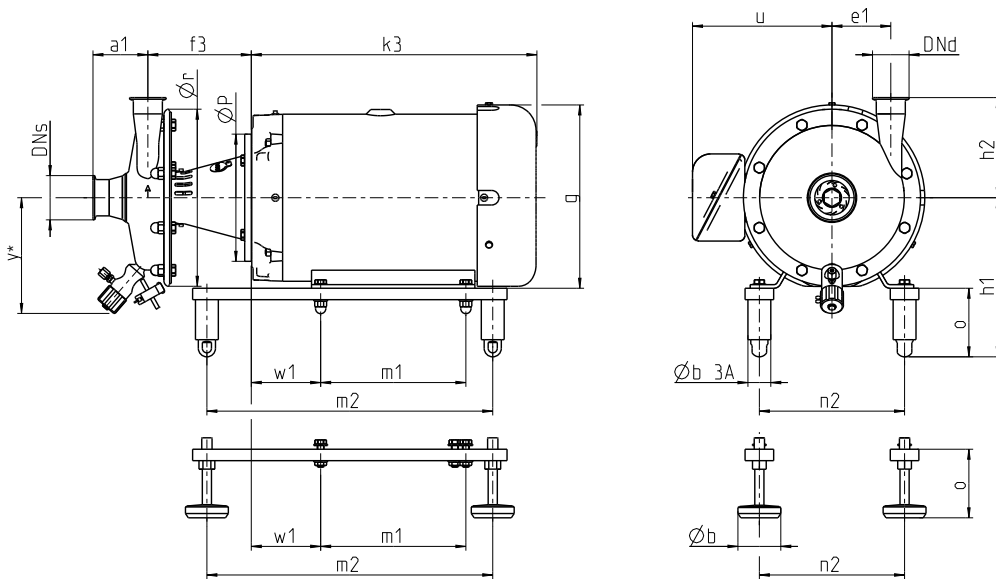


e1 = 4.06 inch
Ør = 12.17 inch
Y* = 7.95 inch

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
143TC	1.00	11.33	5.09	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	102.00
143TC	1.50	11.33	5.09	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	93.00
145TC	2.00	11.73	5.09	8.74	5.24	4.50	5.87	7.33	5.00	11.61	5.50	2.75	5.26	0.87	1.97	96.00
182TC	3.00	15.16	6.29	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	145.00
184TC	5.00	15.16	6.29	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	137.00
213TC	7.50	15.52	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	143.00
215TC	10.00	15.91	6.29	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	175.00

Connections										
DN _s 3" OD DN _d 2" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread	
a1	2.87	2.69	2.97	2.74	4.50	3.33	2.70	2.88	3.90	
h2	6.90	6.59	6.81	6.76	8.28	7.15	6.56	6.91	7.93	

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
* Option: drain valve (dimensions and other drainage variants on request)
Weight: net-weight without packaging

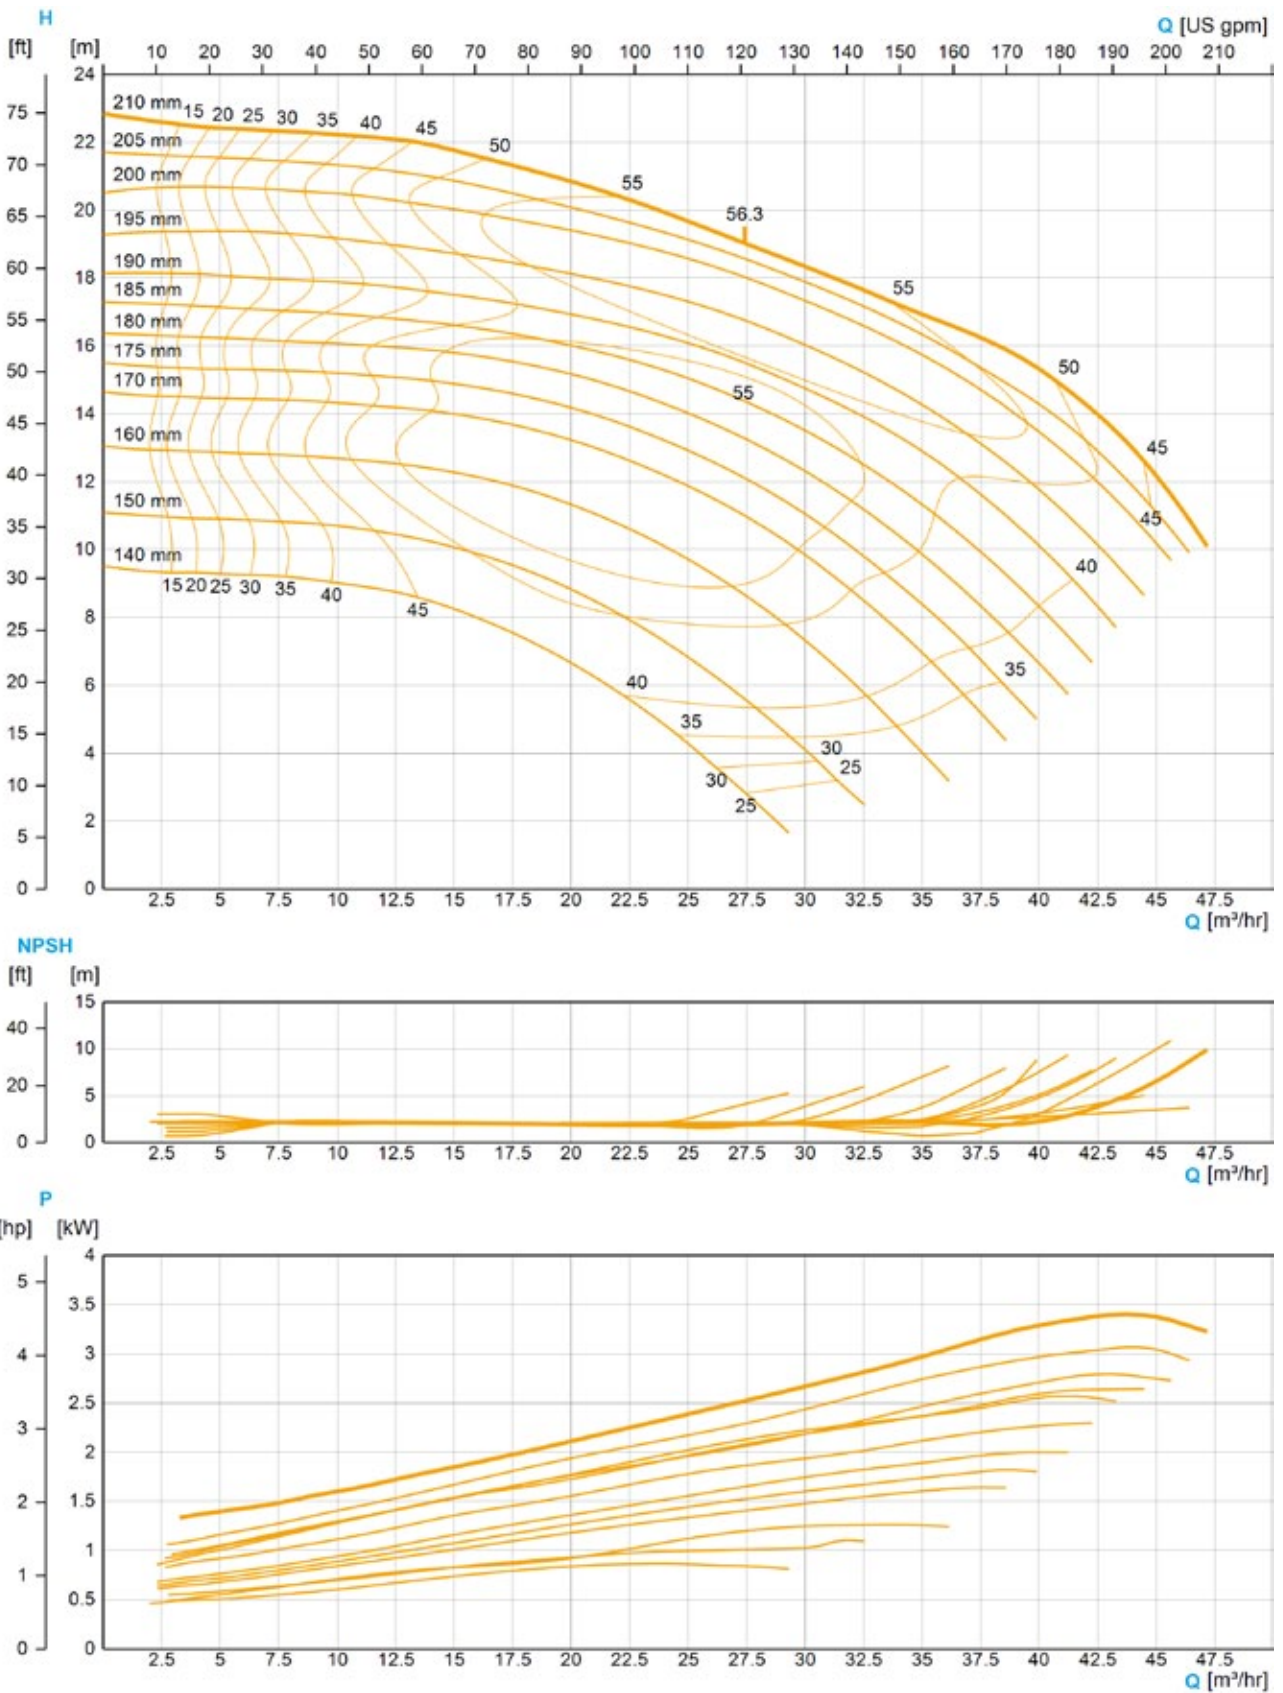

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2½"; 3", pressure port 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 45 m³/h (198 US gpm)
Pump head	Max. 24 m (79 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

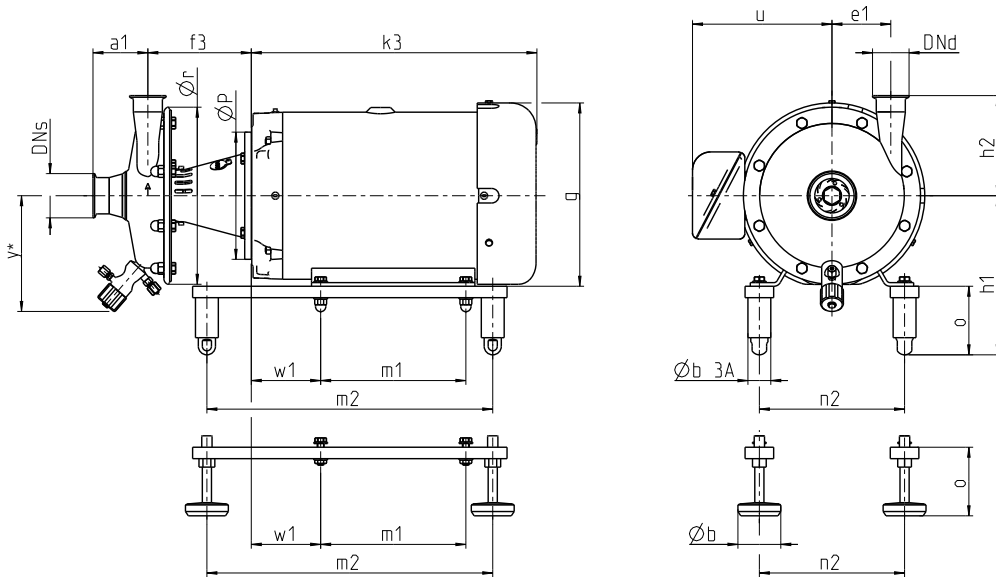

e1 = 4.51 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	153.00
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	145.00
213TC	7.50	15.52	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	151.00
215TC	10.00	15.91	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	175.00


Connections

DNs 3" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.30	9.11	9.33	9.16	10.92	9.75	9.12	9.30	10.32

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

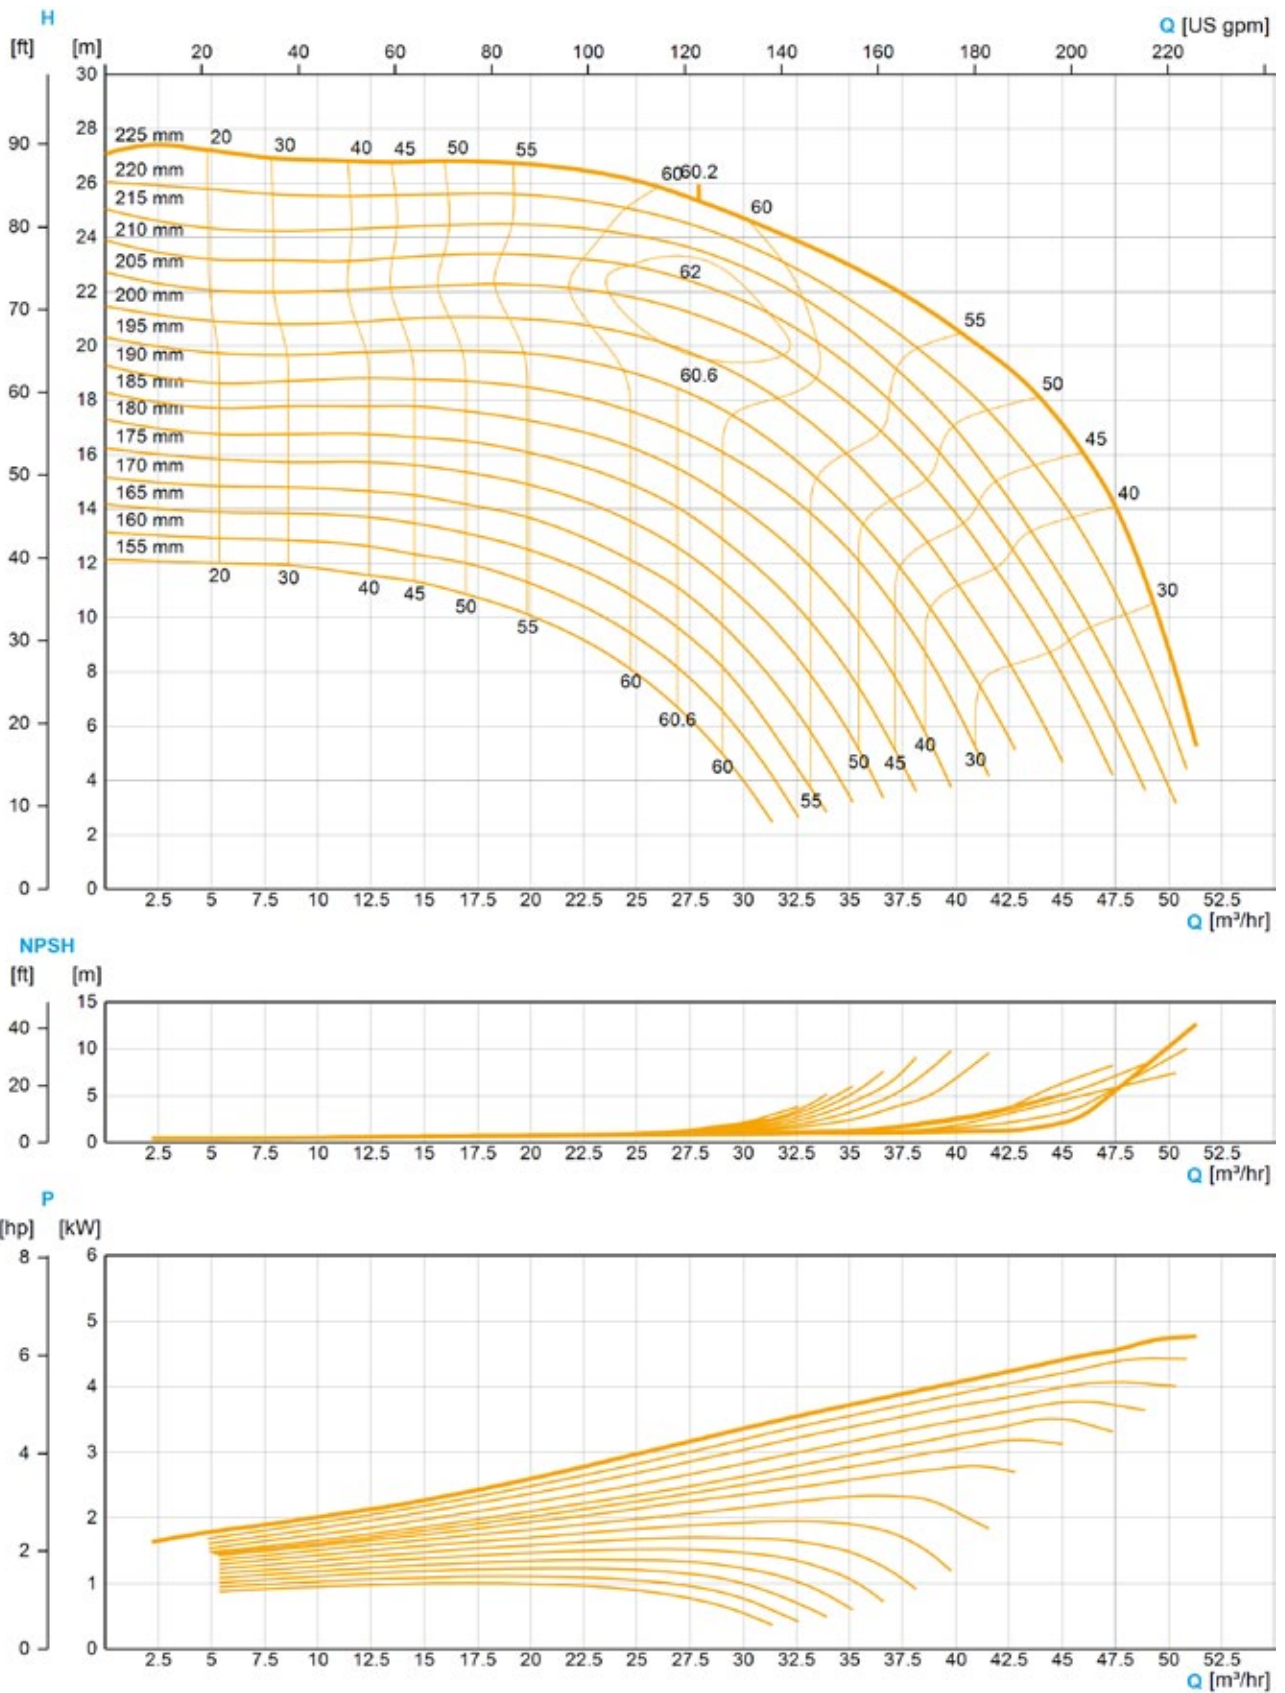

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 2½"; 3", pressure port 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 65 m³/h (286 US gpm)
Pump head	Max. 27 m (89 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	



Further options see page 150 (Composition of Order Code)

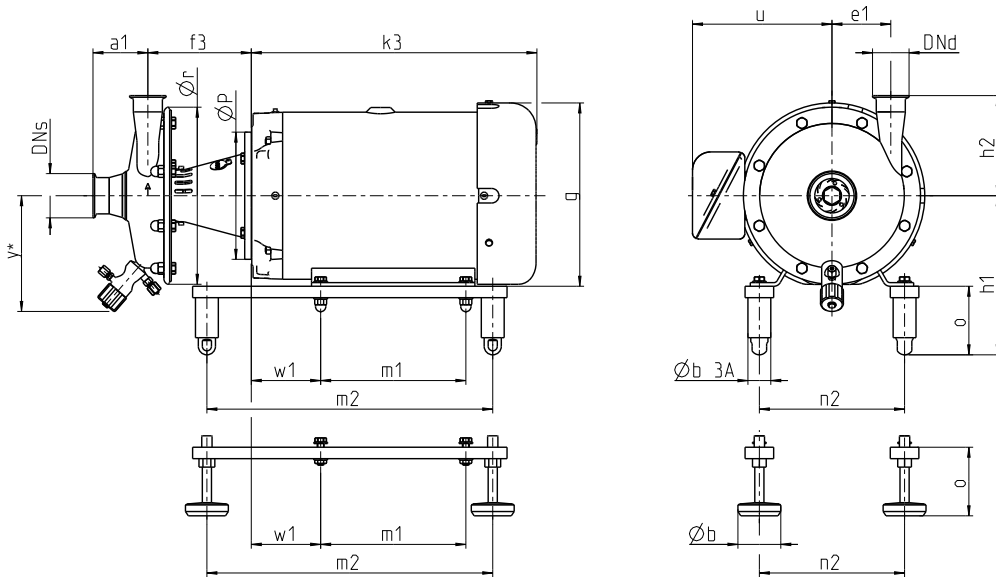

e1 = 4.33 inch
Ør = 13.15 inch
Y* = 8.46 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	153.00
184TC	5.00	15.16	6.33	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	145.00
213TC	7.50	15.52	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	151.00
215TC	10.00	15.91	6.33	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	175.00


Connections

DNs 3" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	3.40	3.22	3.50	3.26	5.03	3.85	3.22	3.41	4.43
h2	9.08	8.90	9.12	8.94	10.71	9.53	8.90	9.09	10.11

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

Weight: net-weight without packaging

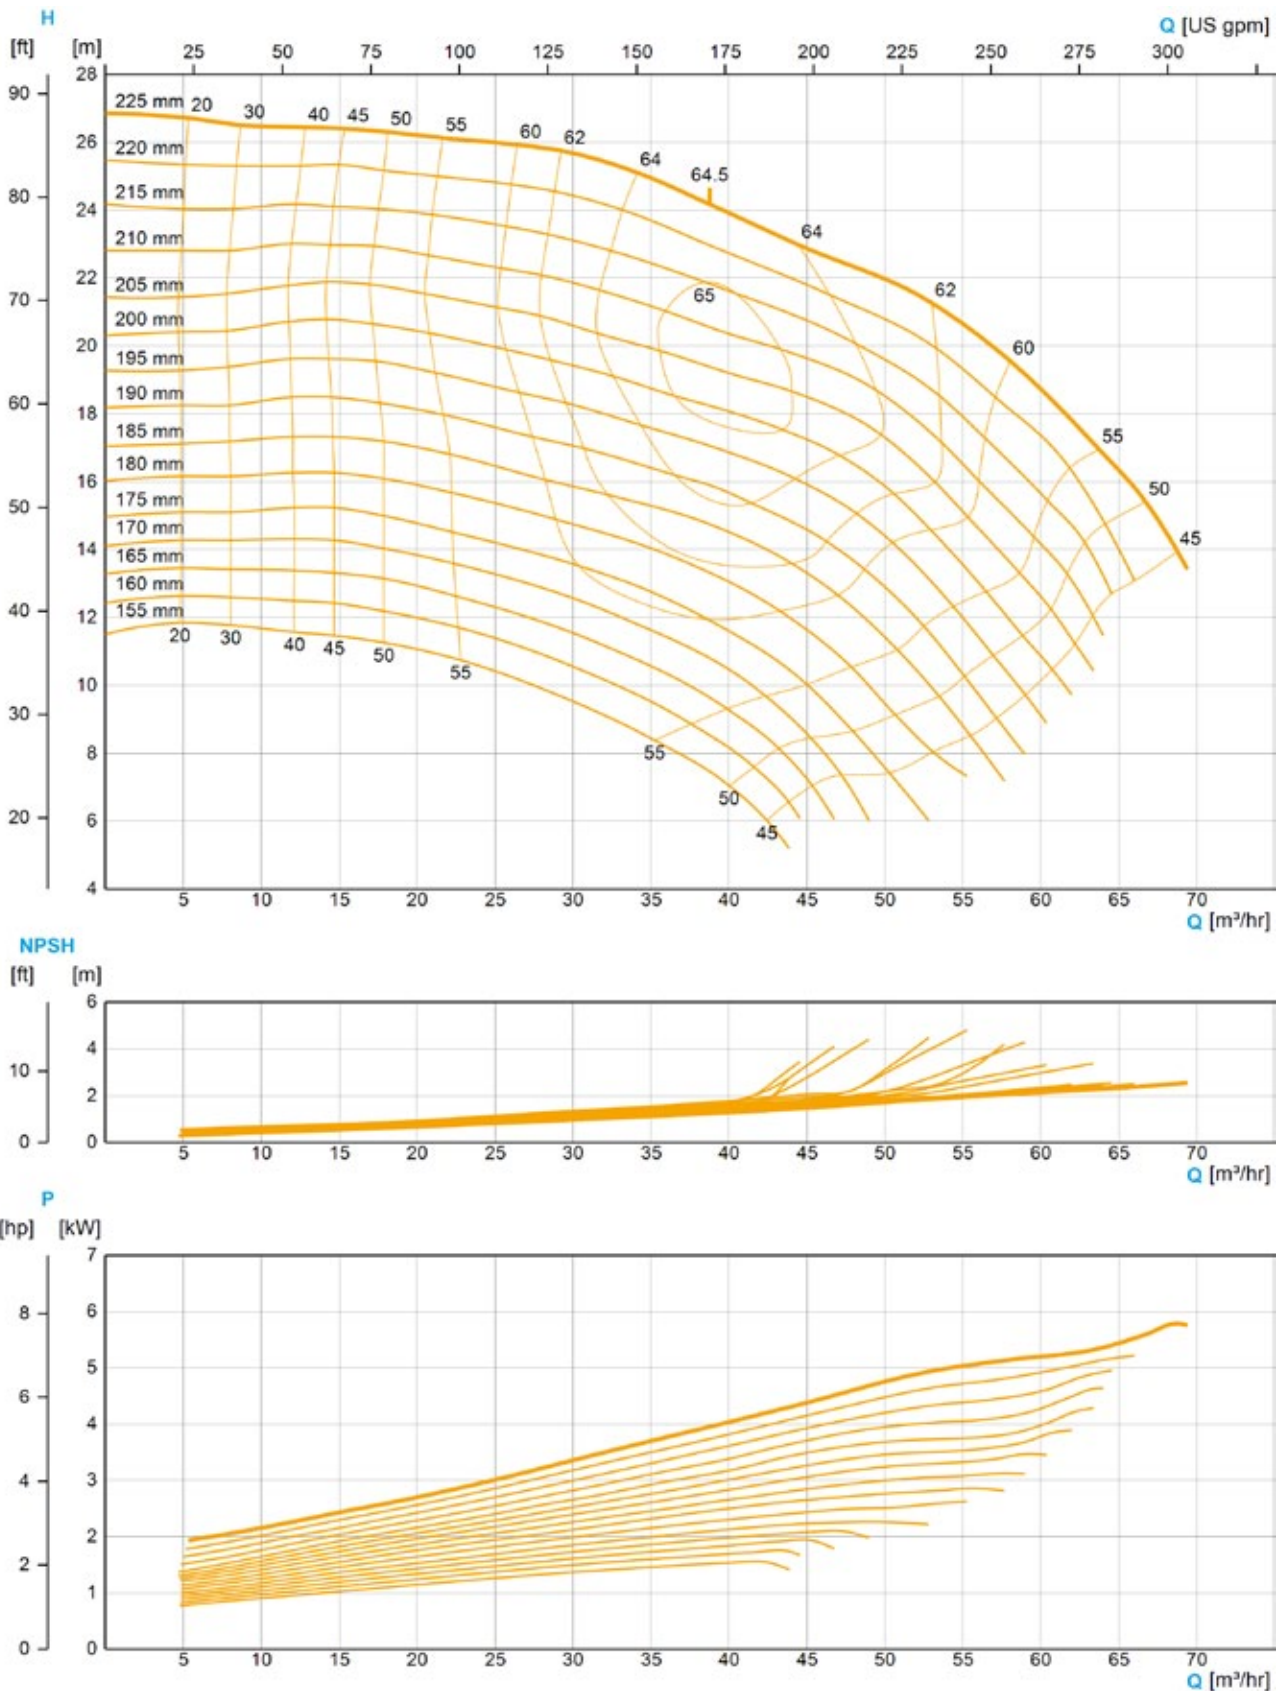

The flow charts are based on water, temperature 59 °F




Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 3"; 4", pressure port 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 78 m³/h (343 US gpm)
Pump head	Max. 20 m (66 ft)
Housing pressure	Max. 16 bar (232 psi)



Further options see page 150 (Composition of Order Code)

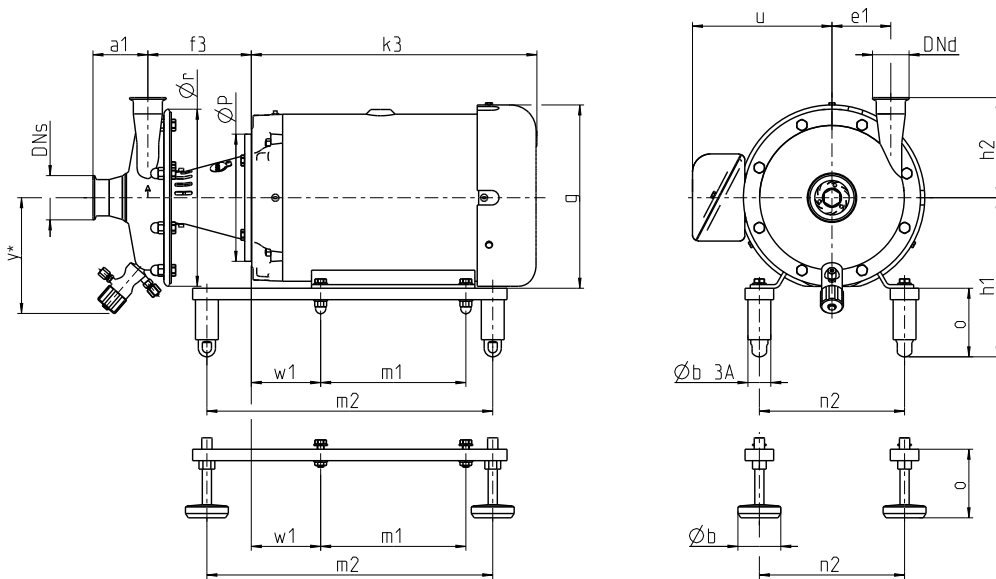

e1 = 4.49 inch
Ør = 17.01 inch
Y* = 8.50 inch

Dimensions

Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.12	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	189.00
184TC	5.00	15.16	6.12	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	190.00
213TC	7.50	15.52	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	186.00
215TC	10.00	15.91	6.12	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	216.00


Connections

DNs 4" OD DNd 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	4.76	4.64	4.80	4.63	6.64	5.77	5.02	4.77	5.79
h2	9.83	9.65	9.87	9.69	11.46	10.28	9.65	9.84	10.86

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor

* Option: drain valve (dimensions and other drainage variants on request)

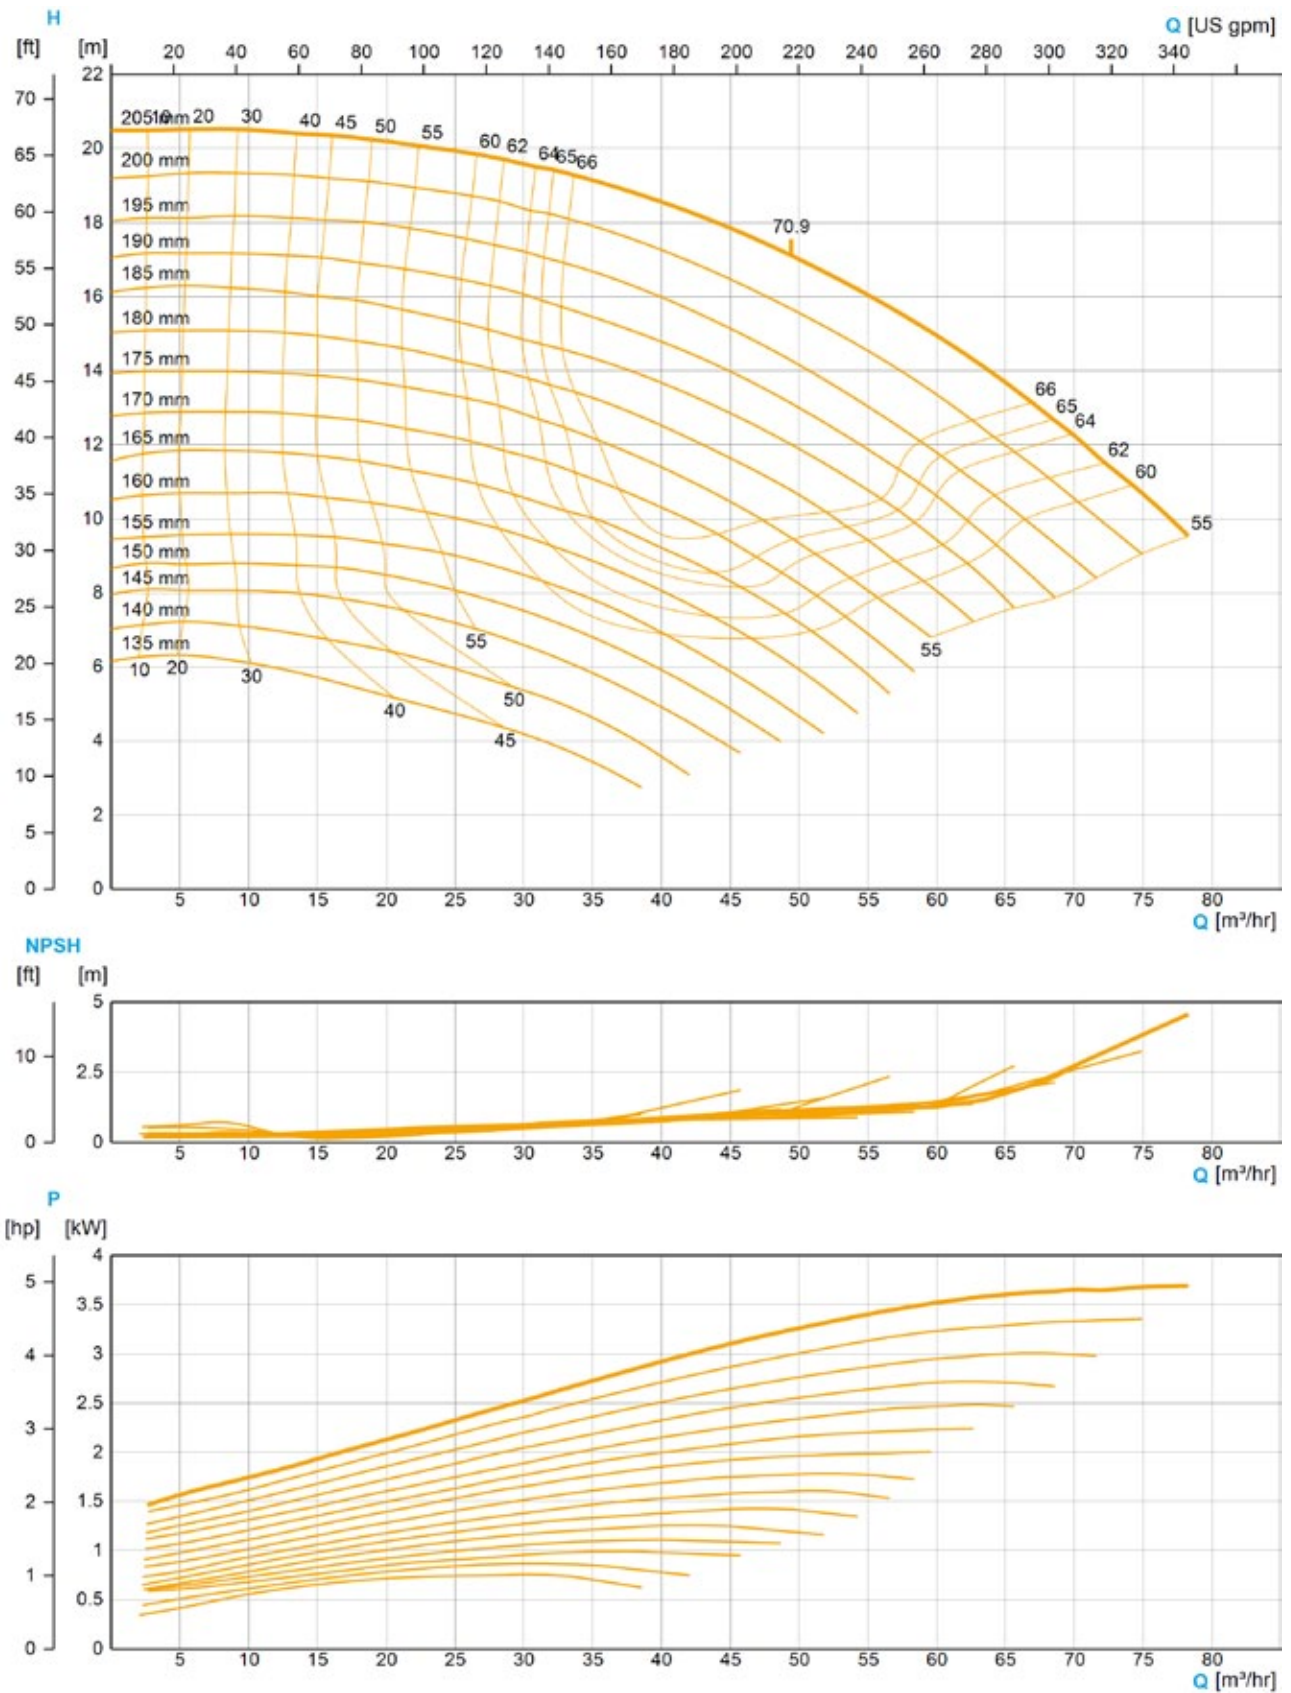

Weight: net-weight without packaging




The flow charts are based on water, temperature 59 °F



Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 3"; 4", pressure port 2"; 2½"; 3"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI, 3-A)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 75 m³/h (330 US gpm)
Pump head	Max. 34 m (112 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	 


Further options see page 150 (Composition of Order Code)

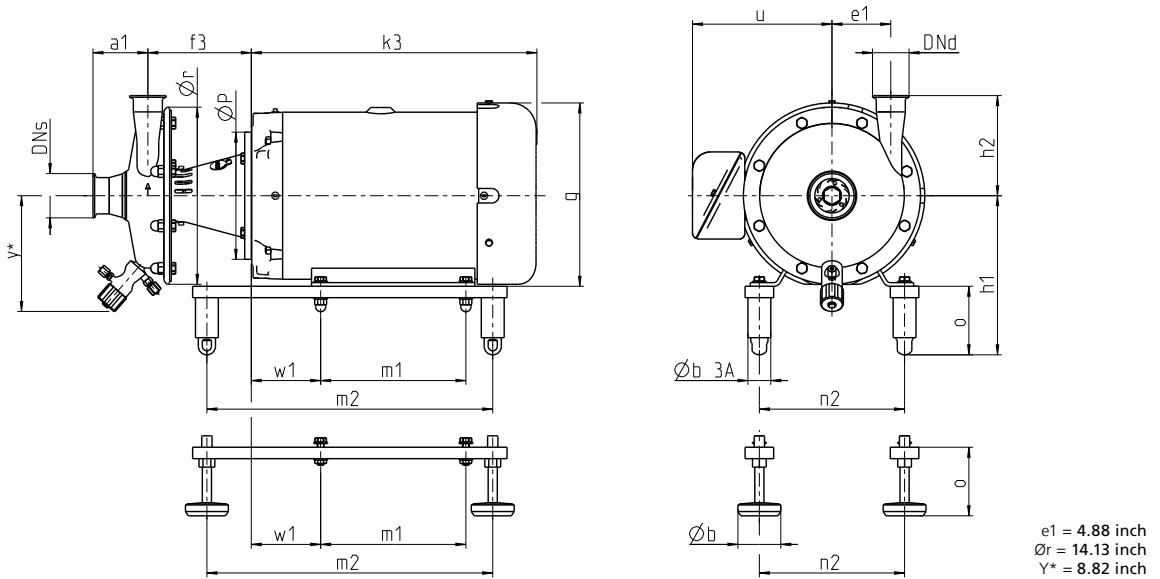

Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
184TC	5.00	15.16	6.42	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	138.00
213TC	7.50	15.52	6.42	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	157.00
215TC	10.00	15.91	6.42	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	189.00

Connections									
DN _s 4" OD DN _d 2 ½" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	4.70	4.58	4.74	4.57	6.58	5.71	4.96	4.71	5.73
h2	9.92	9.74	9.96	9.78	11.55	10.37	9.74	9.93	10.95

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor
 * Option: drain valve (dimensions and other drainage variants on request)
 Weight: net-weight without packaging

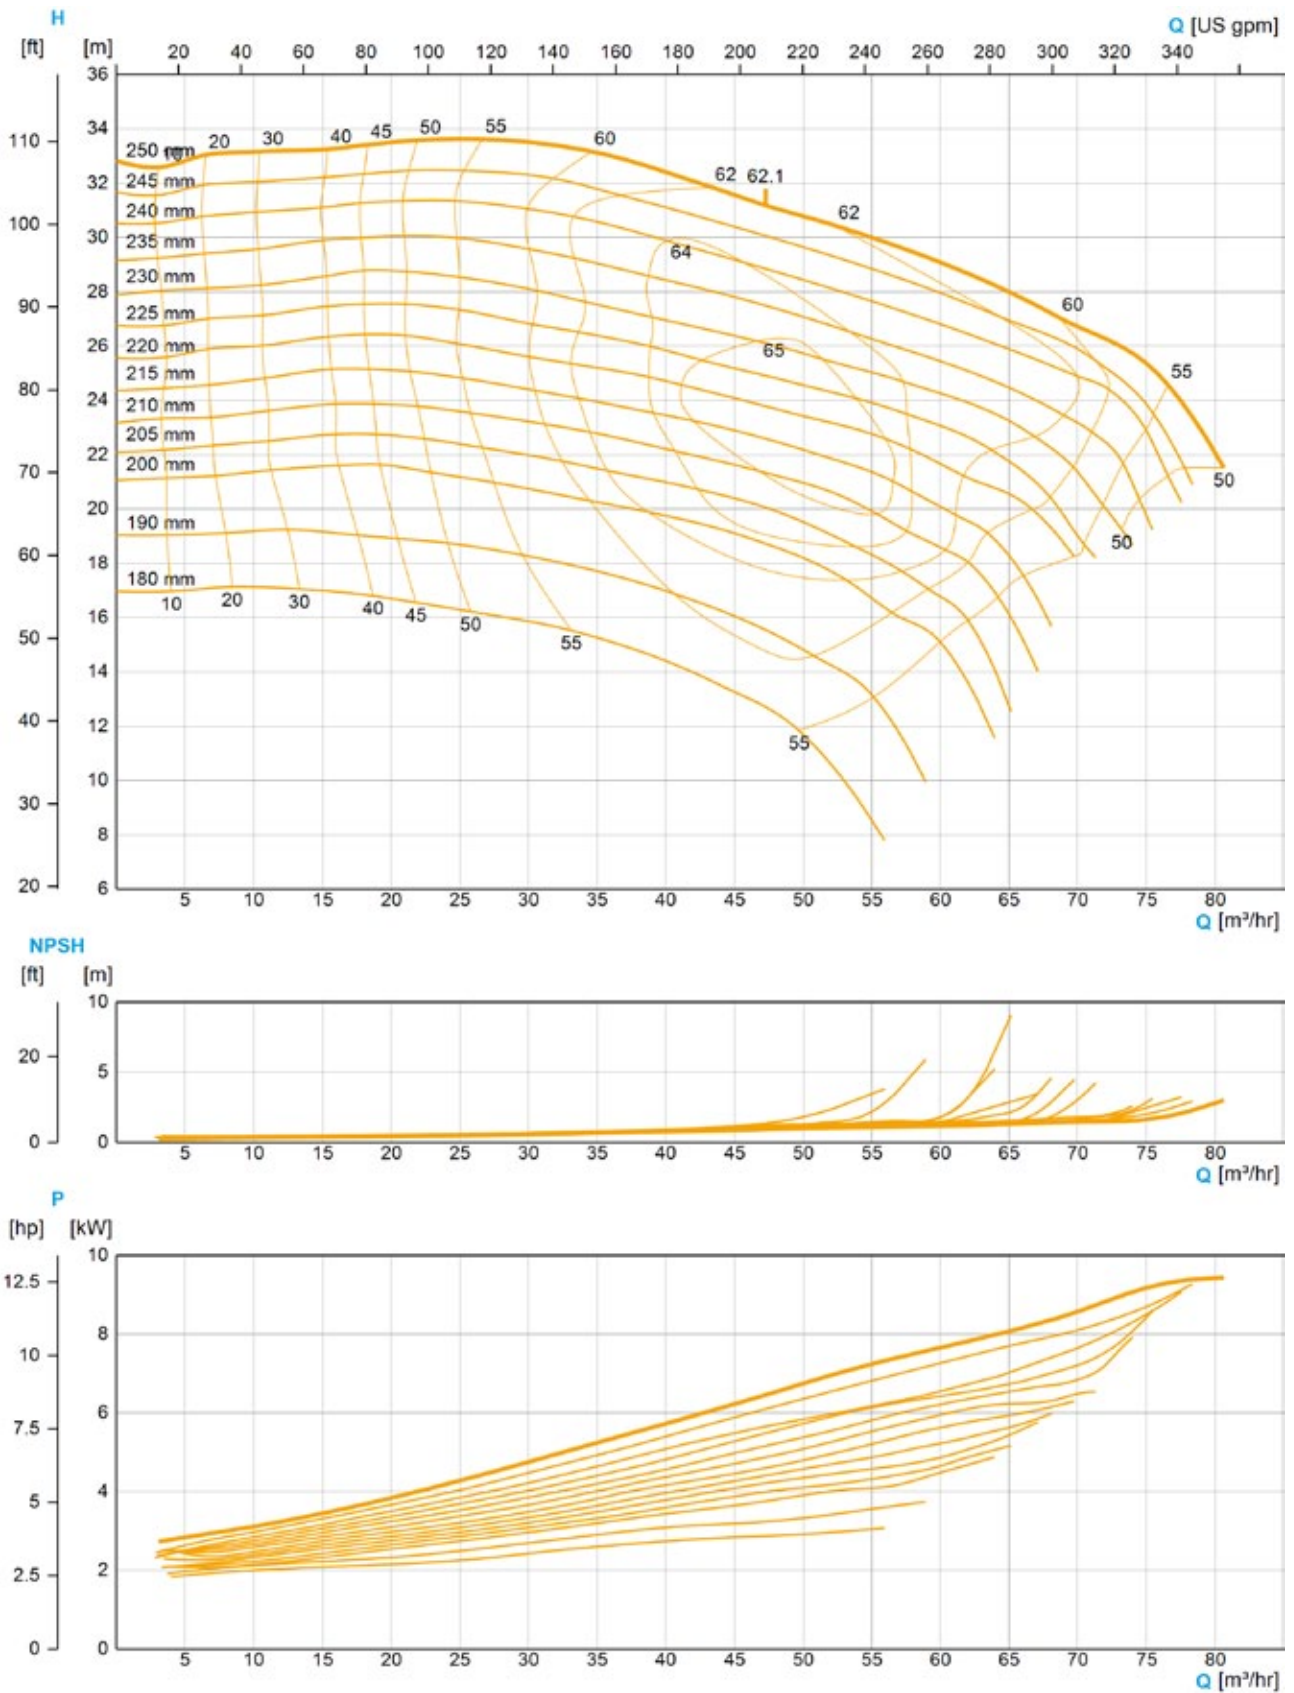


The flow charts are based on water, temperature 59 °F



Technical data of the standard version

Materials	Pump housing: 316L (1.4404), deep-drawn Impeller: 316L (1.4409), precision casting
Connections	Tri-Clamp ASME BPE/DIN 32676
Nominal width of connections	Suction port 4", pressure port 4"
Mechanical seal	Single-acting, material C / SIC / EPDM
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: NEMA-Motor, 3-phase, 208-230V/460V, C-face with foot, IP55, ISO-Class F, incl. PTC thermostat, premium efficiency
Documentation	Operating instructions, declaration of conformity
Flow rate	Max. 120 m ³ /h (528 US gpm)
Pump head	Max. 17 m (56 ft)
Housing pressure	Max. 16 bar (232 psi)
Certificates	

Further options see page 150 (Composition of Order Code)

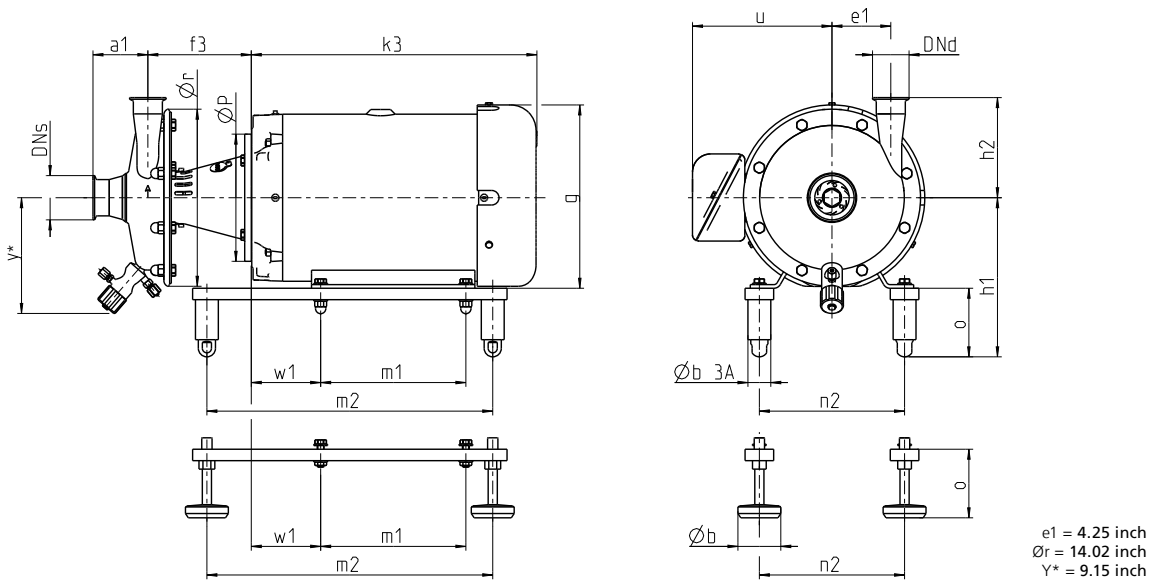




Dimensions																
Frame Size	Power [hp]	k3 [inch]	f3 [inch]	h1 +/- 0.4* [inch]	o +/- 0.4* [inch]	ØP [inch]	u [inch]	g [inch]	m1 [inch]	m2 [inch]	n2 [inch]	w1 [inch]	w2 [inch]	Øb _{3A} [inch]	Øb [inch]	Weight [lb]
182TC	3.00	15.16	6.15	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	167.00
184TC	5.00	15.16	6.15	9.74	5.24	8.50	6.70	9.22	5.50	12.20	7.50	3.50	5.57	0.87	1.97	159.00
213TC	7.50	15.52	6.15	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	165.00
215TC	10.00	15.91	6.15	10.01	4.76	8.50	7.97	10.91	7.00	16.14	8.50	4.25	7.81	0.87	1.97	197.00

Connections									
DNs 4" OD DNd 4" OD	DIN 32676 clamp	Q-line clamp	I-line clamp	VARIVENT® flange	ANSI 16.4 flange	DIN 11851 thread	SMS thread	ACME bevel thread	NPT thread
a1	7.29	7.17	7.51	7.15	9.17	8.29	7.54	7.30	8.32
h2	11.72	11.60	11.94	11.58	13.60	12.72	11.98	11.73	12.75

Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor



* Option: drain valve (dimensions and other drainage variants on request)

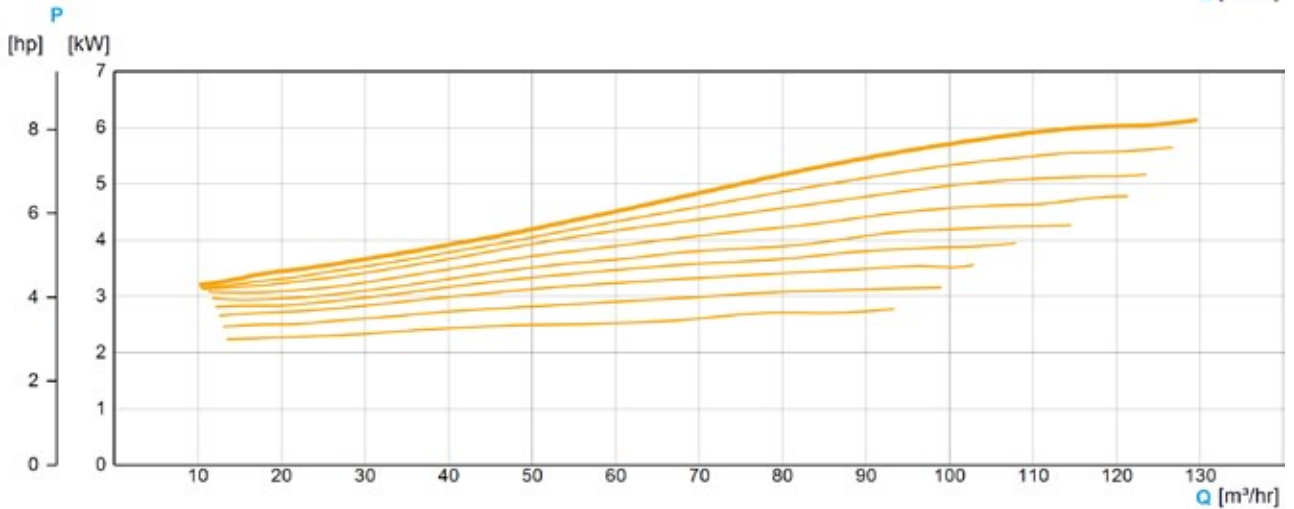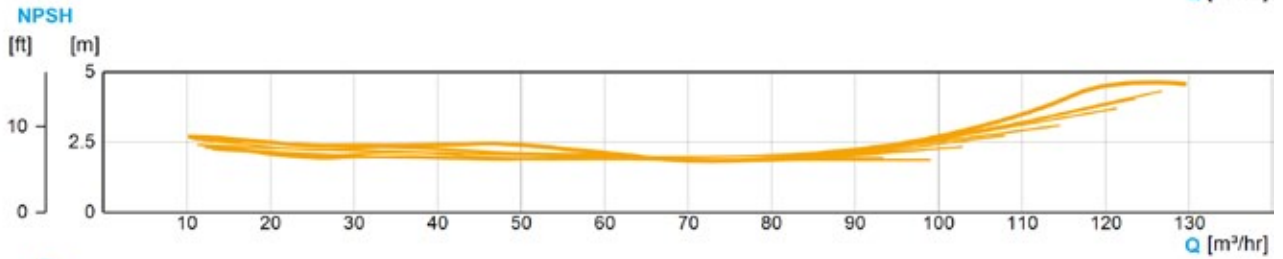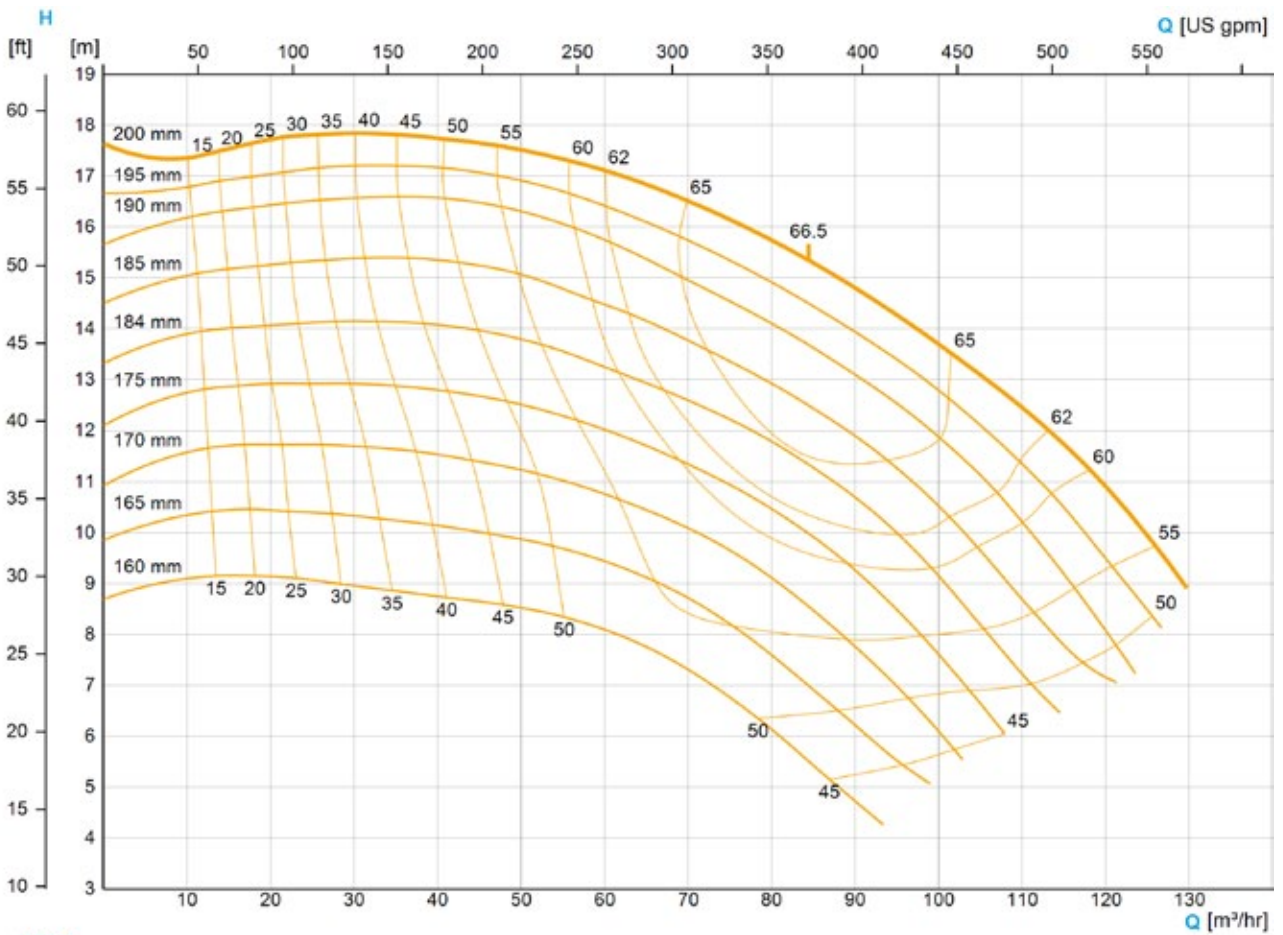


































Weight: net-weight without packaging






The flow charts are based on water, temperature 59 °F

Pump code

 With 3-A Sanitary Standard 

Position	Composition of order code	
1	Pump type	
	 TP 1020	 TP 1540
2	 TP 2030	 TP 2050
	 TP 2575	 TP 3050
3	 TP 5060	 TP 7060
	 TP 8050	 TP 8080
4	 TP 16040	
	No. of stages	
5	1 1-stage	
	Version	
6	D 3-A	A/B/C Non 3-A
	Design	
7	K	
	 Plug-in shaft	
8	Mounting	
	 H On 3-A Stainless Steel Adjustable Feet	 M* On Motor Foot
9	 B On Adjustable Feet	
	Stainless steel shroud	
10	S With stainless steel shroud	W Without stainless steel shroud
	Impeller	
11	C	
	 Semi-open	
12	Impeller diameter (mm)	
	Connection type	
13	 COA Tri-clamp	 QL Q-line clamp
	 IL I-line clamp	 TN VARIVENT® flange
14	 AAB ANSI-B 16.5 flange	 ASK DIN 11864-2 flange complete
	 ASN DIN 11864-2 / DIN 11853-2 flange	 NFK DIN 11864-2 flange
15	 NPT NPT thread	 IG IDF thread
	 SMG SMS thread	 SMK SMS thread complete
16	 BEV ACME bevel thread	 GK DIN 11851 thread complete
	 GO DIN 11851 thread	 RJK RJT thread complete
17	 GSK DIN 11864-1 thread	 AVK DIN 11864-1 thread complete
	 RJT RJT thread	

10	Connection norm		
	D DIN	O OD	I ISO
11	Diameter suction side		
	DIN	OD	ISO
	1 40–150	2 1½" (1.5)–4" (4)	3 48.3 (48)–114.3 (144)
12	Diameter pressure side		
	DIN	OD	ISO
	1 40–100	2 1½" (1.5)–4" (4)	3 48.3 (48)–114.3 (144)
13	Surface roughness		
	1 $R_a \leq 125 \mu\text{in}$ (3.2 μm)	3 $R_a \leq 32 \mu\text{in}$ (0.8 μm)	
14	Material product-wetted parts		
	2 1.4404 (316L)		
15	Ferrite content		
	W Without restriction		
16	Execution of mechanical seal		
	E	Q	P
			Face to face (Double)
	Single	Quench	
17	Mechanical seal, execution of spring		
	E  Encapsulated spring		
18	Mechanical seal material (static)		
	a Carbon		
	i SiC shrunk		
19	Mechanical seal material (rotating)		
	a Carbon		
	e Stainless steel		
	i SiC shrunk		
20	Elastomer		
	V Viton / FKM		
	E EPDM		
	B Buna		
21	Options		
	C Drainage connection (Tri-clamp)	V Drainage Vesta	W Without drain
	D Drainage VTP	S Special	
22	Further options		
	Drain		
	0.75 ¾"		
	W Without drain		

* The pump needs to be mounted according to 3-A Sanitary Standard.

Example of pump order code:

Position	1	2	3	4	5	6	7	8	9			
Code	TP3050	1	D	K	H	W	C	180	COA			
10	11	12	13	14	15	16	17	18	19	20	21	22
O	2	x 2	3	2	W	E	E	a	e	E	W	W

Motor code

Position	Composition of order code							
1	Motor standard							
	IEC		NEMA			IEC NEMA		
2	No. of poles							
	2	2-pole	4	4-pole	6	6-pole	8	8-pole
3	Frequency							
	50	50 Hz						
4	Motor power							
	1 hp to 60 hp							
5	Voltage							
	400/690	400VD/690VY						
	230/400	230VD/400VY						
	220/380	220VD/380VY						
6	Motor design							
	B5	B5	B34	B34	B35	B35		
7	Size							
	143TC to 364TSC							
8	Efficiency class							
	1	IE 1						
	2	IE 2						
	3	IE 3						
	4	IE 4						
	5	IE 5						
	P	NEMA premium efficiency						
S	NEMA super premium efficiency							
9	Protection class							
	55	IP55	56	IP 56	65	IP65	66	IP66
10	Motor supplier (alternative motor suppliers on request)							
	S Standard							
11	Options							
	G	General purpose						
	W	Washdown						
	A	Stainless steel washdown						
12	Terminal box							
	L	Left	R	Right	O	Top	U	Bottom
13	External fan							
	M	With external fan			W	Without external fan		
14	Thermistor							
	M	With thermistor			W	Without thermistor		
15	Frequency converter							
	F	With integrated frequency converter			W	Without integrated frequency converter		
16	ATEX							
	M	With ATEX			W	Without ATEX		

Example of motor dimension order code:

Position	1	2	3	4	5	6	7	8
Code	NEMA	2	60	15 hp	208-230/460	CM	254TC	P
	9	10	11	12	13	14	15	16
	55	S	G	L	W	W	W	W

INQUIRY SHEET · CENTRIFUGAL PUMPS 1/2



GEA Hygienic Pumps

Contact Data

Company: _____

Contact Person: _____ E-Mail: _____

Phone: _____ State: _____

Preferred Range

VARIPUMP SMARTPUMP No requirement

Liquid Data

*Liquid: _____ Solids: No Yes:

*Liquid temperature [°F]: _____ Kind of solids: _____

*Density [lb/ft³]: _____ Size of solids [in]: _____

Viscosity [cPs]: _____ Abrasive: No Yes

Concentration [%]: _____

Operating Conditions

*Duty point 1 Flow [US gpm]: _____ *Head [ft lc]: _____

Duty point 2 Flow [US gpm]: _____ *Head [ft lc]: _____

End-suction pump: Self-priming pump:

Inlet pressure (NPSHa) [ft]: _____ Vacuum at inlet: No Yes

Suction head [ft]: _____ Vacuum, abs. [psi]: _____

System pressure [psi]: _____ Gas content: No < 5 % > 5 %

Cleaning / Sterilization

CIP: No Yes: SIP: No Yes:

CIP Temperature [°F]: _____ SIP Temperature [°F]: _____

CIP Flow [US gpm]: _____ SIP Duration [min]: _____

CIP Head [ft]: _____

Pump execution

*Connection Type ASME

Tri Clamp (DIN 32676) ANSI Flange

Other: _____

Connection Size

DN_i/DN_o:

Drain port

No

Yes: _____

Execution and Design

Bloc version: Pump with stub shaft and motor Combi foot Vertical

Adapta bloc version: Pump with bearing bracket and standard motor On Trolley Vertical with stainless steel stand

With stainless steel shroud Motor foot

3-A Stainless Steel Adjustable Feet Horizontal

* Fields marked with an asterisk are mandatory for a pump selection

INQUIRY SHEET · CENTRIFUGAL PUMPS 2/2



GEA Hygienic Pumps

Surface Roughness

- Not specified
- $R_a \leq 125 \mu\text{in}$ (3.2 μm)
- $R_a \leq 32 \mu\text{in}$ (0.8 μm)
- $R_a \leq 16 \mu\text{in}$ (0.4 μm)

Ferrite Content

- Not specified
- $F_e < 1\%$

Shaft Seal

- Single mechanical seal
- Flushed mechanical seal

Material Shaft Seal

- Carbon/Stainless Steel
- SiC/SiC
- Carbon/SiC
- other: _____

Elastomer

- EPDM
- FKM (Viton)
- other: _____

Motor Data

Supply voltage:

- 3~ 480V/60 Hz
- 3~ 208-230/460V/60 Hz
- 3~ 230V/60 Hz
- 3~ 575V/60 Hz
- other: _____

Motor speed [1/min]: _____

Thermistors: No Yes

Variable speed drive No Yes:

- External frequency converter (not on motor)
- Integrated frequency converter (on motor)

Explosion atmosphere No Yes

EXP Motor No Yes:

Temperature class: _____
 Ambient Temperature [°F]: _____
 Class: _____

















Division: _____
 Group: _____

Certificates/Documentation

- 3-A Sanitary Standard
- Inspection certificate 3.1 acc. to DIN EN 10204
- Test report 2.2 acc. to DIN EN 10204
- EHEDG
- UL
- Further certificates and documentation: _____
- FDA declaration of conformity
- Surface roughness test report
- Delta ferrite test report
- CSA
- cURus/cULus

Further Information

* Fields marked with an asterisk are mandatory for a pump selection

2.1		Works certificate according to DIN EN 10204: Declaration of the compliance with the order. This certificate is issued by the manufacturer.
2.2		Test report according to DIN EN 10204: Declaration of the compliance with the order under specification of the results of non specific tests. This certificate is issued by the manufacturer.
3.1		Inspection certificate 3.1 according to DIN EN 10204: Declaration of the compliance with the order under specification of the results of specific tests. This certificate is issued by an authority which is independent of manufacturing and is validated by the manufacturers authorised inspection representative
3-A		3-A Sanitary Standards, Inc. (3-A SSI) is an independent, non-profit corporation dedicated to advancing hygienic equipment design for the food, beverage, and pharmaceutical industries.
AS-i		Actuator Sensor interface. BUS system for the lowest field level.
ASME-BPE		Standard of the ASME's – bioprocessing equipment association
ATEX		Atmosphères Explosibles. ATEX comprises the directives of the European Union in the area of explosion protection. For one thing, this is the ATEX equipment directive 94/9/EC, for another, the ATEX workplace directive 1999/92/EC.
cCSAus		Test of a product by CSA according to applicable safety standards in Canada and the USA.
CE		Conformité Européenne. By affixing the CE mark, the manufacturer confirms that the product complies with the European directives applicable to the specific product.
CSA		Canadian Standards Association. A non-governmental Canadian organization which issues standards as well as checking and certifying the safety of products. It is now globally active.
cULus		Test of a product by UL according to applicable safety standards in Canada and the USA.
DIN EN ISO 9001:2015		This norm is the basis for a multitude of varied organizations in different industries worldwide for quality assurance and quality management. It is the most widespread standards of ISO (International Organisation for Standardization).
EAC		Euroasion conformity. The symbol is used similar to the European CE mark. The manufacturer or supplier confirms that the machine has passed all necessary compliance procedures in ohne of the Member States of the customs union.
EG 1935/2004		Materials in contact with the product used in pumps from GEA Hilge are in accordance with EC regulation 1935/2004. This defines a general framework for materials and objects intended to come into contact with foodstuffs.
EHEDG		European Hygienic Engineering & Design Group. European supervisory authority for foodstuffs and pharmaceuticals. This authority issues approvals and certificates for products and materials that are used in the foodstuffs and pharmaceuticals industries.
FDA		Food and Drug Administration. US supervisory authority for foodstuffs and pharmaceuticals. This authority issues approvals and certificates for products and materials that are used in the foodstuffs and pharmaceuticals industries.
QHD		The QHD (Qualified Hygienic Design) is a two-phase testing system for the hygienic design and cleanability of components, machinery and plants for aseptic or sterile applications. The system ensures that all surfaces can be cleaned in place (CIP). The QHD symbol is used by manufacturers to indicate compliance with the QHD criteria.
UL		Underwriters Laboratories. An organization founded in the USA for checking and certifying products and their safety.
USP Class VI		The United States Pharmacopeial Convention (USP) is a scientific nonprofit organization that sets standards to help protecting public health. Class VI administer tests and impacts of material and their substances on animal and human tissues.

Abbreviation	Explanation
°C	Degrees Celsius, unit of measurement for temperature
°F	Degrees Fahrenheit, unit of measurement for temperature
3D	Three-dimensional
A	Ampere, unit of measurement of current intensity or Output, term used in automation
AC	Alternating Current
ADI free	All elastomer compounds are free of animal-derived ingredients
AISI	American Iron and Steel Institute, association of the American steel industry
ANSI	American National Standards Institute, American body for standardizing industrial processes
approx.	approximately
AS-i	Actuator Sensor interface, standard for fieldbus communication
ASME	American Society of Mechanical Engineers, professional association of mechanical engineers in the USA
ASME-BPE	Standard of the ASME's – bioprocessing equipment association
ATEX	Atmosphères Explosibles, synonymous with the directives of the European Union for potentially explosive areas
bar	Unit of measurement for pressure. All pressure values [bar/psi] refer to positive pressure [bar _g /psi _g], unless specifically stated otherwise.
bar _g	Unit of measurement for pressure relative to atmospheric pressure
CAN	Controller Area Network; asynchronous serial bus system
CE	Conformité Européenne, administrative symbol for the free movement of industrial products
CIP	Cleaning In Place, designates a process for cleaning technical process systems.
CRN	Canadian Registration Number, is issued by a Canadian Jurisdiction and covers pressure vessels, fittings, or pressure piping. It is a necessary authorization allowing these components to be in operation in Canada.
CSA	Canadian Standards Association, a non-governmental Canadian Standardization organization
Cv	The Cv value corresponds to the water flow rate through a valve (in US gal / min) at a pressure differential of 1 PSI and a water temperature of 5 °C to 30 °C. kv = 14,28 Cv (USA).
Cvs	The Cv values of a valve at nominal stroke (100 % opening) is designated the Cvs value.
dB	Decibel, one tenth of a bel, named after Alexander Graham Bell and used for identifying levels and dimensions
DC	Direct Current

Abbreviation	Explanation
DIN	Deutsches Institut für Normung e. V. Standardization organization in the Federal Republic of Germany, DIN = synonym for standards issued by the organization
DIP	Dual Inline Package, design of a switch
DN	Diameter Nominal, DIN nominal width
Device Net	Network system used in the automation industry to interconnect control devices for data exchange
E	Input, term used in automation
EAC	Certification of technical conformity from the customs union of Russia/Balarus/Kazakhstan
Pressure Equipment Directive 97/23/EC	Directive of the European Parliament and the Council Directive for layout and conformity evaluation for pressure equipment and assemblies with a maximum pressure (PS) of more than 0.5 bars.
EG No. 1935/2004	Regulation of the European Parliament which lays down common rules for materials which come, or may come, into contact with food, either directly or indirectly.
EHEDG	European Hygienic Engineering and Design Group. Consortium of equipment manufacturers, food industries, research institutes as well as public health authorities
EN	European standard, rules of the European Committee for Standardization
EPDM	Ethylene propylene diene rubber, acronym acc. to DIN/ISO 1629
Ex	Synonym for ATEX
FDA	Food and Drug Administration, official foodstuffs monitoring in the United States
FEM calculation	Finite Element Method; calculation process for simulating solids
FKM	Fluorinated rubber, acronym acc. to DIN/ISO 1629
GOST	Gosudarstvennyy Standart, Certification of conformity for components according to standards and regulations of the Russian Federation
H	Henry, unit of measurement for inductance
HNBR	Hydrated acrylonitrile butadiene rubber, acronym acc. to DIN/ISO 1629
Hz	Hertz, unit of frequency named after Heinrich Hertz
I	Formula symbol for electrical current
IEC	International Electrotechnical Commission, international standardization organization for electrical and electronic engineering
IP	Ingress Protection/International Protection, index of protection class acc. to IEC 60529
IPS	Iron Pipe Size, American pipe dimension
ISA	International Society of Automation, international US organization of the automation industry

Abbreviation	Explanation
ISO	International Organization for Standardization, international organization that produced international standards, ISO = synonym for standards from the organization
kg	Kilogram, unit of measurement for weight
Kv	The Kv value corresponds to the water flow rate through a valve (in m ³ /h) at a pressure differential of 0.98 bar and a water temperature of 5 °C to 30 °C.
Kvs	The Kv values of a valve at nominal stroke (100 % opening) is designated the Kvs value
L	Conductive
LED	Light-Emitting Diode
mm	Millimeter, unit of measurement for length
M	Metric, system of units based on the meter or Mega, one million times a unit
m ³ /h	Cubic meters per hour, unit of measurement for volumetric flow
max.	Maximum
NAMUR	Standardization working association for measuring and control technology in the chemical industry, synonym for the interface type of the organization, especially for potentially explosive atmospheres
NC	Normally Closed; valve or solenoid valve control which is closed in idle status
NO	Normally Open; valve or solenoid valve control which is open in idle status
NOT-element	Logic element, NOT gate
NPN	Signal transmission against reference potential, current-consuming
NPT	National Pipe Thread, US thread standard for self-sealing pipe fittings
OD	Outside Diameter, pipe dimension
ODVA	Open DeviceNet Vendor Association, global association for network standards
PA 12/L	Polyamide
Pg	Armoured thread
PN	Nominal pressure for pipeline systems according to EN 1333, rated pressure in bar at room temperature (20 °C)
PNP	Signal transmission against reference potential, current-supplying
PPO	Polyphenylene oxide, thermoplastic material
PS	Maximum permitted operating pressure at which the components can operate safely at maximum allowable temperature (TS)

Abbreviation	Explanation
psi	Unit of measurement for pressure, pound-force per square inch, 1 psi = 6894.75 Pa. All pressure values [bar/psi] refer to positive pressure [$\text{bar}_g/\text{psi}_g$], unless specifically stated otherwise.
psi_g	Unit of measurement for pressure relative to atmospheric pressure
PV	Solenoid valve
R_a in μm	Average roughness value, describes the roughness of a technical surface
International Protection-Code IP67, IP66, IP69K	Classifies and rates the degree of protection provided against intrusion dust, accidental contact, and water
SES	GEA Tuchenhagen control head for Ex areas, control top system of GEA Tuchenhagen
SET-UP	Self-learning installation, the SET-UP procedure carries out all necessary settings for generating messages during commissioning and maintenance.
SIP	Sterilization in Place, refers to a process for cleaning technical process systems
SMS	Svensk Mjök Standard, Scandinavian pipe dimension
SW	Indicates the size of a tool spanner, "Schlüsselweite"
TA-Luft VDI 2440	If a product is certified according to TA Luft it meets the requirements for proof of high grade performance according to TA Luft of $1.0 \times 10^{-4} \text{ mbar} \times l / (s \times m)$ at service conditions under the VDI guideline 2440. The product will hence be tested for tightness.
TS	Maximum permitted operating temperature
UL	Underwriters Laboratories, a certification organization established in the USA
USP Class VI	The United States Pharmacopeial Convention (USP) is a scientific nonprofit organization that sets standards to help protecting public health. Class VI administer tests and impacts of material and their substances on animal and human tissues.
UV	Ultraviolet, ultraviolet radiation is a wavelength of light
V	Volt, unit of measurement for voltage
VMQ	High-polymer vinyl methyl polysiloxane, silicone rubber, MVQ = synonym
W	Watt, unit of measurement for power
Y	Control air connection for the working cylinder, designation from pneumatic systems
μ	Micro, one millionth of a unit
Ω	Ohm, the unit of electrical resistance named after Georg Simon Ohm



We live our values.

Excellence • Passion • Integrity • Responsibility • GEA-versity

GEA is a global technology company with multi-billion euro sales operations in more than 50 countries. Founded in 1881 the company is one of the largest providers of innovative equipment and process technology. GEA is listed in the STOXX® Europe 600 Index. In addition, the company is included in selected MSCI Global Sustainability Indexes.

GEA North America

33 McAlister Farm Road
Portland, ME 04103
Toll-Free 866 531 5629
Fax 207 878 7914

GEA Canada

5045 South Service Road, Suite 201
Burlington, Ontario L7L 5Y7
Tel 289 288 5500

sales.unitedstates@gea.com
gea.com